ASSEMBLY INSTRUCTIONS (For LD8176-9)

WARNING!

OThis chair has a 250 lbs weight capacity.


Hang cushion over chair frame to dry if it gets wet to prevent mold/mildew.

- 1. Please read these instructions carefully before assembly.
- 2. Aluminum is soft metal over tighten may strip threads or break the part.
- 3. DO NOT use power tools.
- 4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
- 5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

Assembly steps:

- 1. Place the lounger(A) on a soft surface.
- 2. Attach the left arm(C)to the lounger with bolt(G), flat washers(H), lock washers(I), nut(J) and nut caps(K).
- 3. Place the Axel into the left arm, attach the wheels(E), then tighten with the big flat washers(M), small lock washers(N),short bolts(L) .
- 4. Attach the right arm(D) to the lounger, repeat step 2.
- 5. Attach (B) to the bedsection with long bolts(O), PVC washers(P),small flat washers(Q),lock nut(R), nut cap(S)and pvc cover(T).

Warning: DO NOT use acid or alkaline washing liquid to clean the product.

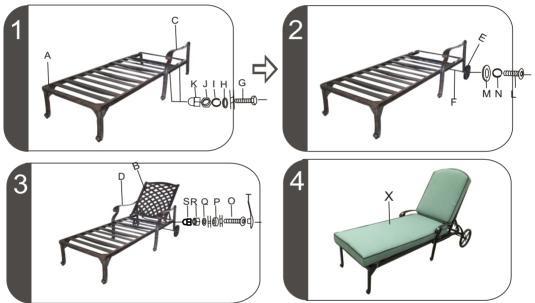

					· ·			
Parts list	Parts picture	Description	Qty		Parts list	Parts picture	Description	Qty
					G	(M8*45)	Bolt	4
Α		Lounger	1		Н	(M8)	flat washer	4
					ı	0	Big lock washer	4
В		Backrest	1		J	©	Nut	4
					K	(M8)	nut cap	4
С	F	Left arm	1	İ	L	(M6*15)	Short bolt	2
					М	(M6)	Big flat washer	2
	91			l	N	0	Small lock washer	2
D		Right arm	1		0	(M6*60)	Long bolt	2
	, .				Р	9	PVC washer	2
E	(S)	Wheel	2		Q	(M6)	Small flat washer	2
					R		Lock nut	2
F		Axel	1		S	(M6)	nut cap	2
W	-	Foot leveler	Factory already assembled		Т	—	PVC cover	2
					U		Wrench	1
X		Cushion	1		V	23	Wrench	1

*** DO NOT OVER TIGHTEN**

Made in

