

# Levity® Frameless Sliding Shower Door K-706008-D3

#### Features

• Cushioned center guide provides smooth, quiet sliding action.

#### Technology

- Frameless, 1/4-inch-thick Frosted tempered glass.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Vertical blade handles accentuate the contemporary style.
- CleanCoat<sup>®</sup> nanotechnology provides a smooth, nonstick surface to help prevent buildup of water stains, bacteria and mildew on your glass, to make it easy to clean and keep it looking like new.

#### Installation

- Sliding shower door.
- Not for use in hospitality.

### **Recommended Products/Accessories**

K-23723 Faucet cleaner

#### **Included Components**

Additional Components: Hardware kit



## **Codes/Standards**

CPSC 16CFR 1201 ANSI Z97.1

#### **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.

11-	SH	Bright Silver
	MX	Matte Nickel
11	ABV	Anodized Brushed Bronze
	ABZ	Anodized Dark Bronze

### **Available Glass Options**

Code Description


D3 Frosted



# Levity®



Frameless Sliding Shower Door K-706008-D3

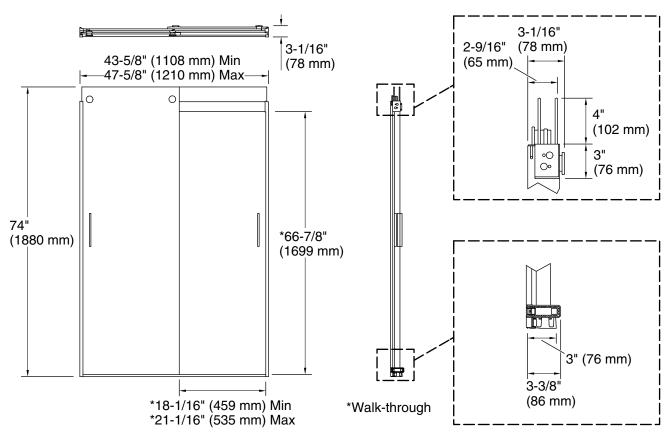

# Technical Information

All product dimensions are nominal.			
Installation type:	For shower base installation		
Opening style:	Sliding/Bypass		
Opening Width - Min:	43-5/8" (1108 mm)		
Opening Width - Max:	47-5/8" (1210 mm)		
Walk-through - Min:	18-1/16" (459 mm)		
Walk-through - Max:	21-1/16" (535 mm)		
Base-To-Wall Radius – Max:	1/2" (13 mm)		
Glass thickness:	1/4" (6 mm)		
Glass coating:	CleanCoat®		

#### Notes

Install this product according to the installation guide.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 76-1/2" (1943 mm) to allow for installation clearance.

