ASSEMBLY INSTRUCTIONS

(For LD8176-11)

Parts List				
Pieces		Schema	Description	QTY
Α		(M8*55)	Screw	4
В			Flat washer	4
С			Lock washer	4
D			Nut	4
E			Alu plate	4
F	(M8)		Nut cap	4
G	5_3		Wrench	1
Н			PE cap	Factory already assembled
1	2		Seat	1
J	1		Base	1
	2		Alu plate	2
	3		Spring plate	2
	4	(M8*35)	Screw	4
	5		Flat washer	4
	6		Lock washer	4
	7		Nut	4
	8	1	TR	1
K			Seat Cushion	1



WARNING!

- O This chair has a 250 lbs weight capacity.
- O Hang cushion over chair frame to dry if it gets wet to prevent mold/mildew.

ATTENTION:

- 1. Please read these instructions carefully before assembly.
- 2. Aluminum is soft metal over tighten may strip threads or break the part.
- 3. DO NOT use power tools.
- 4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
- 5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

ASSEMBLY INSTRUCTIONS

(For LD1031D-44)


ATTENTION:

- 1. Please read these instructions carefully before assembly.
- 2. Aluminum is soft metal over tighten may strip threads or break the part.
- 3. DO NOT use power tools.
- 4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
- 5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

Assembly steps:

- 1.Loosely attach the 4 legs (C) to the table top with bolts(D), flat washers(E), lock washers(F), nuts(G) and nut caps(H).Do not over-tighten.
- 2.Loosely attach each of the 4 center plates(B) to the legs. Note that the recessed end of each plate goes on the leg last at each corner. Secure using flat washers, lock washers, nuts(G) and nut caps(H)(show as the figure).
- 3. Tighten all the bolts and nuts completely. DO NOT over tighten the nuts and bolts.
- 4. Turn the table onto its legs and use the adjuster feet to level the tables.

Warning: please do not use harsh chemicals to clean the table.

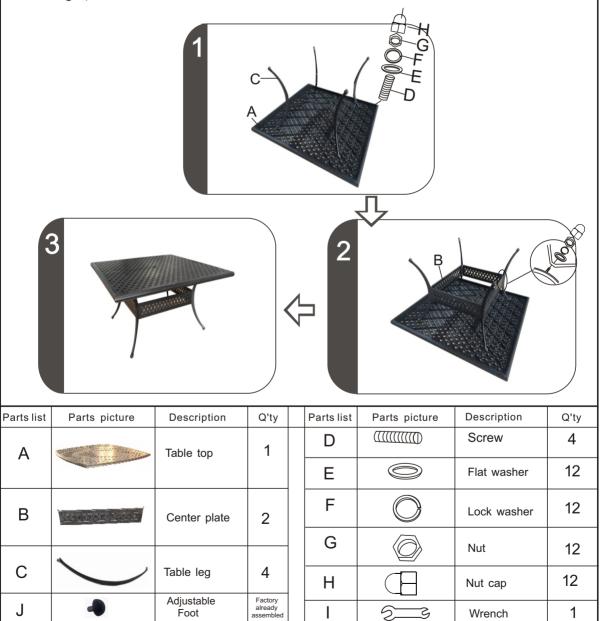

* DO **NOT OVER TIGHTEN**

in China Made

*NO **POWER TOOLS**

3

Wrench

***NO SOCKET DRIVERS**


J



Foot



1

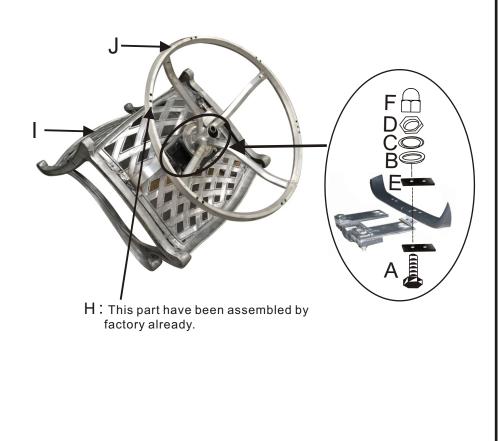

- Before removing all protective packing material and position base on floor. Attach the seat(I) onto the base (J)with Alu plate as the picture, then assemble using bolt(A), flat washers(B), lock washers(C), nuts(D) and nut cap(F). Be sure to the arrows face to front.
- 2. Tighten all the bolts and nuts. Test the swivel rocker gently. If the rocker does not rock properly, double check the assembly procedure.
- 3. Remove all protective packaging.
- 4. Put Cushion(K) on the unit(as shown in the picture).

Warning DO NOT use acid or alkaline washing liquid to clean the product.



***DO NOT OVER TIGHTEN**

***NO SOCKET DRIVERS**



