


Installation Guide



LED INFO & WARNINGS

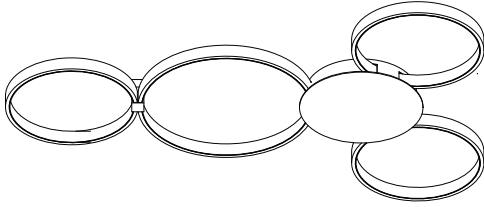

VONN Lighting
Model: VMCF41500




- Please read and comprehend the entire manual before attempting to assemble, operate, or install the product.
- Make sure that you have all necessary parts by checking the parts list. If any part is missing or damaged, please contact **VONN Lighting Customer Service at 888-604-8666** for a replacement.
- All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn or broken.
- Inspect the LED fixture prior to installation to make sure that it has not been damaged during shipping.
- Please handle the LED light with care when unpacking. Do not apply pressure to the LED's, do not open any factory sealed compartments, and do not touch the LEDs with your hands.

VONN highly recommends to use a qualified, licensed electrician to install the fixture.


- VONN recommends to install the fixture on its own independent circuit. Do not install the fixture on the same circuit with other appliances, or HVAC Systems.
- Do not remove or replace VONN manufactured driver that is provided with the fixture.
- Shut "OFF" the electricity at main fuse box.
- Place the wall switch in the "OFF" position of the room you are installing the fixture.

Parts List

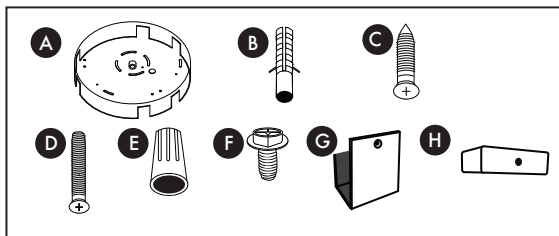


- A. Canopy
- B. Plastic Anchors x 3
- C. Anchor Screws x 3
- D. Outlet Screws x 3
- E. Wire Connectors x 3
- F. Ground Screw x 1
- G. Mounting Bracket
- H. Mounting Block


Circuit Box

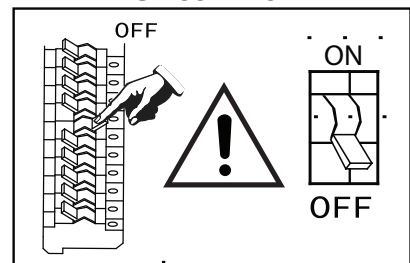


Tools You May Need

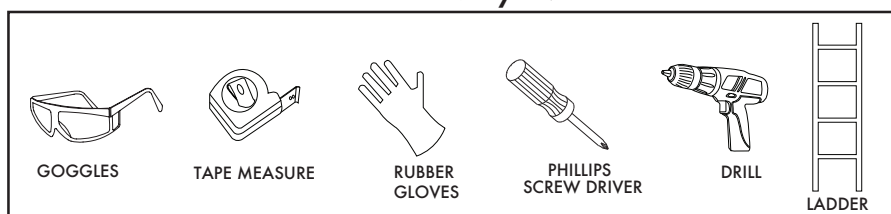


Fixture Diagram

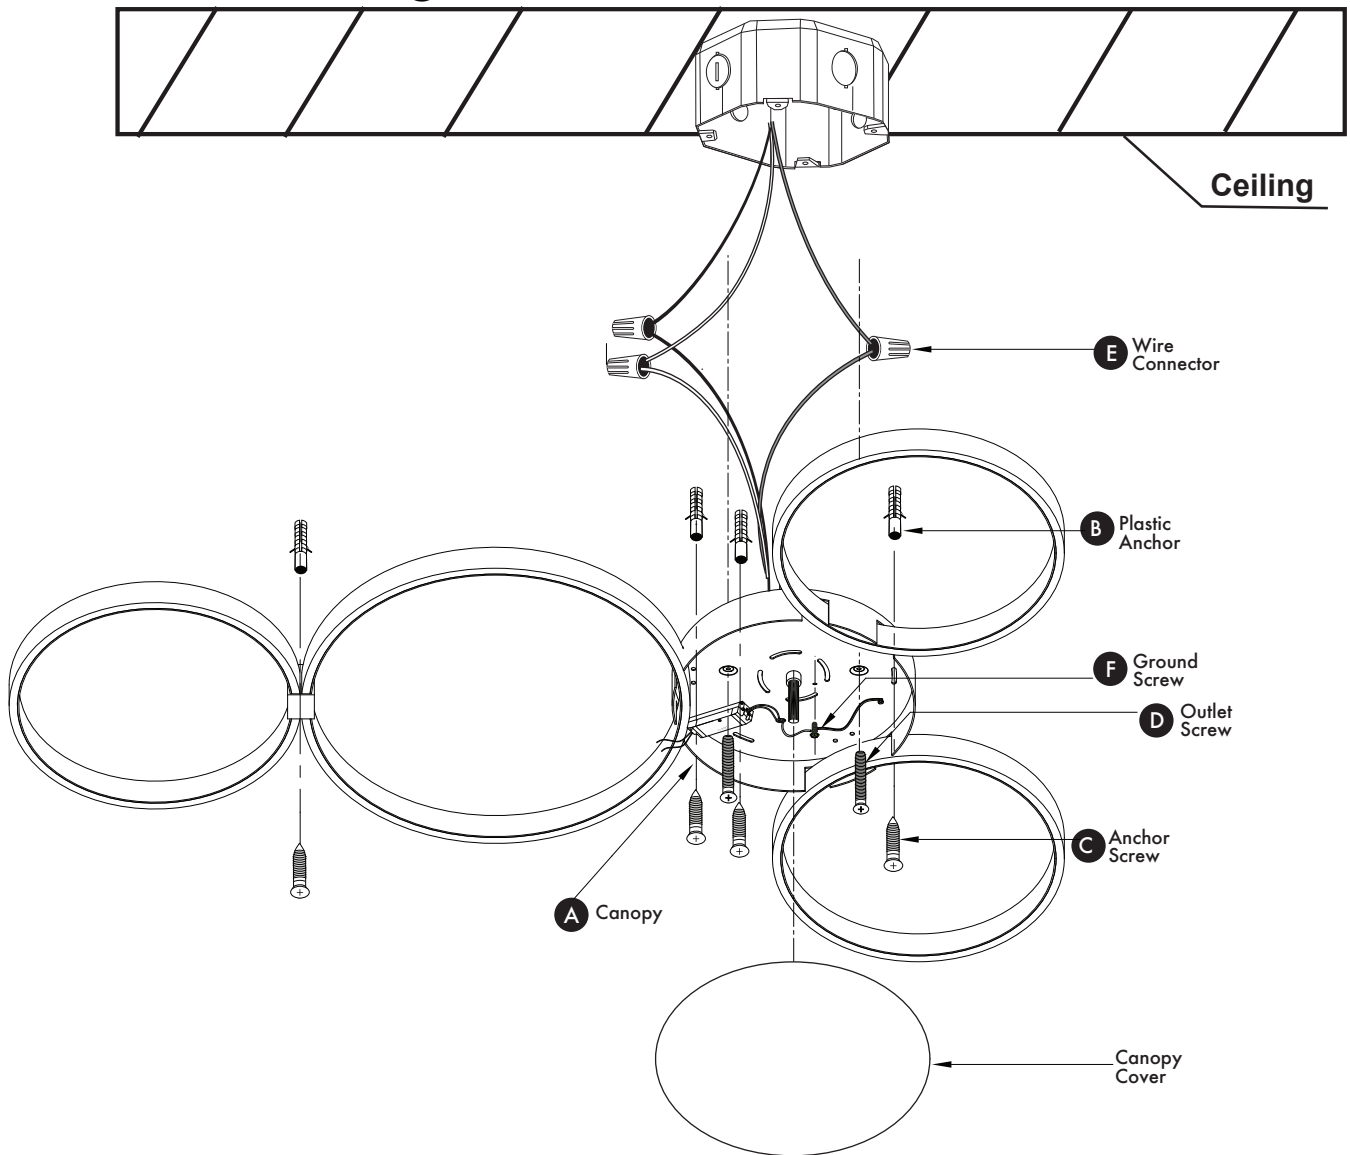

Step 1. Install Canopy

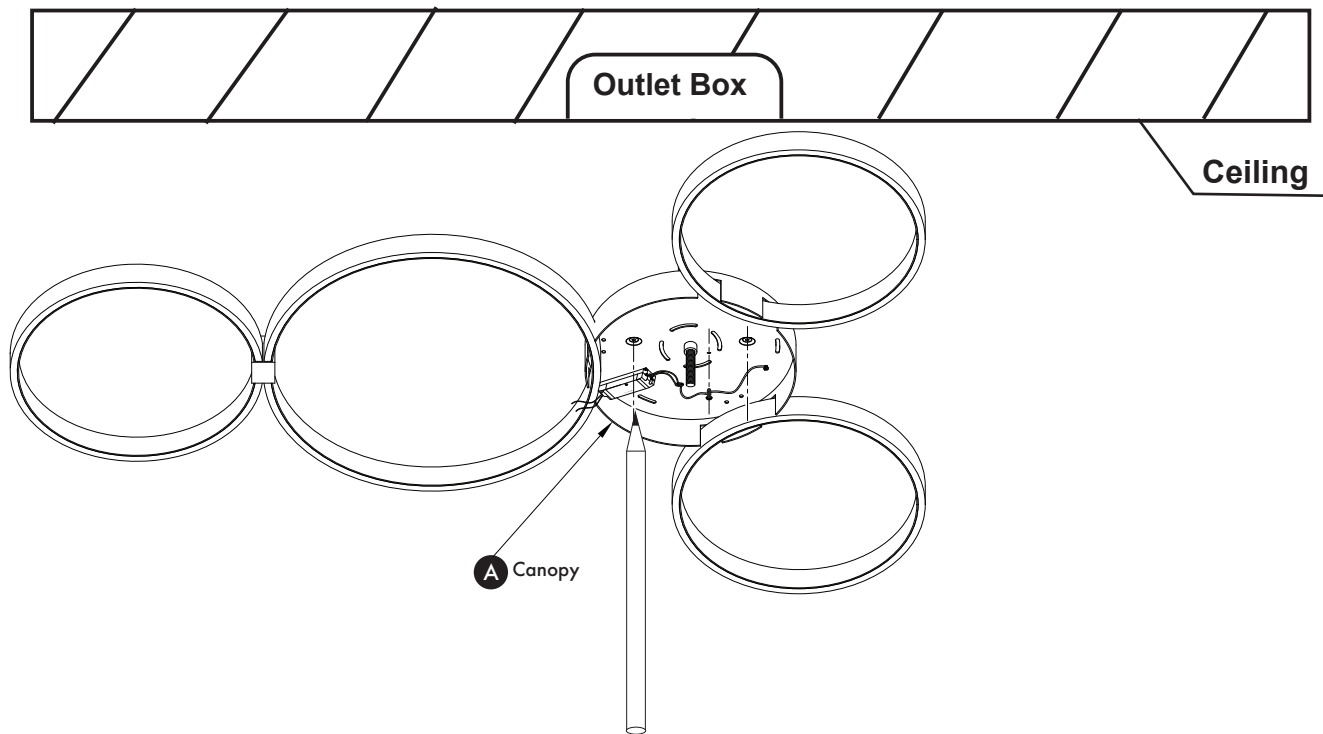


Remove canopy cover from canopy (A). Raise canopy (A) to the ceiling. Mark location for plastic anchors (B). Drill holes for plastic anchors (B). Insert plastic anchors (B) into hole.

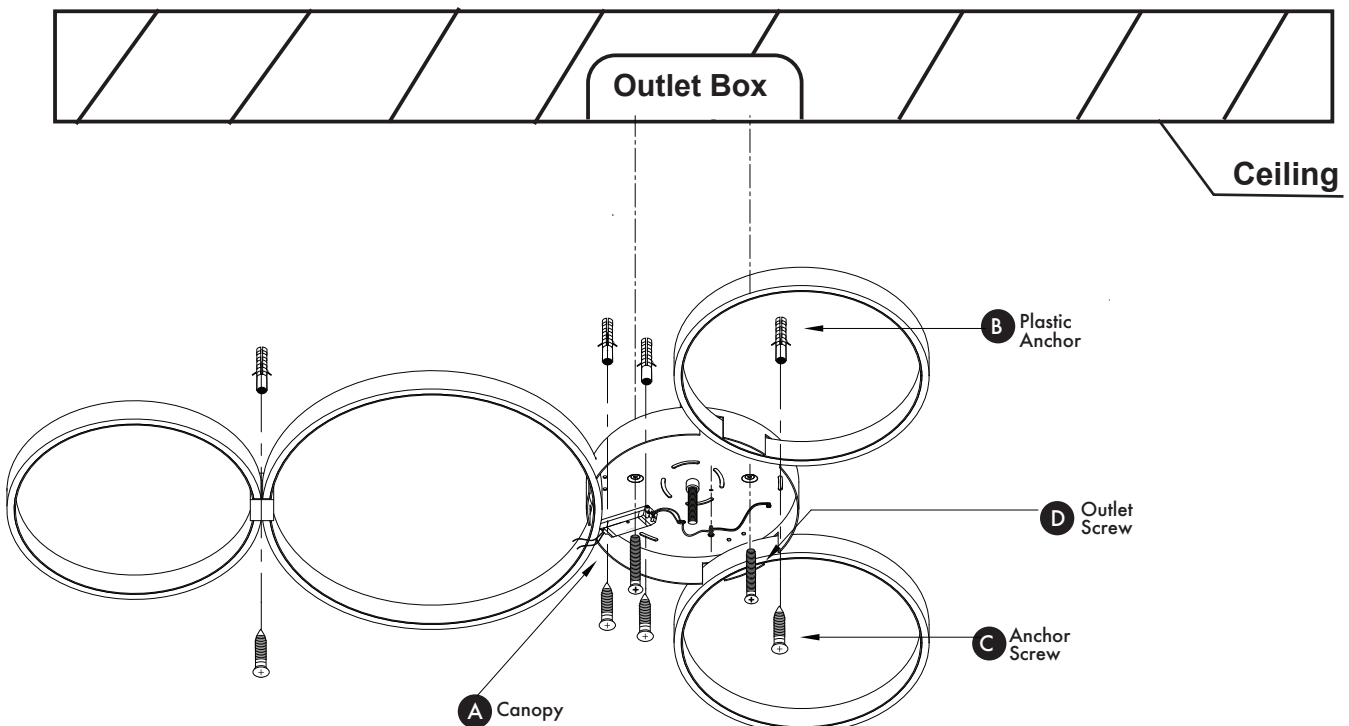

Attach canopy (A) to outlet box with outlet screws (D). Screw anchor screws (C) into plastic anchors (B) to secure canopy (A).

Step 4. Mount Fixture

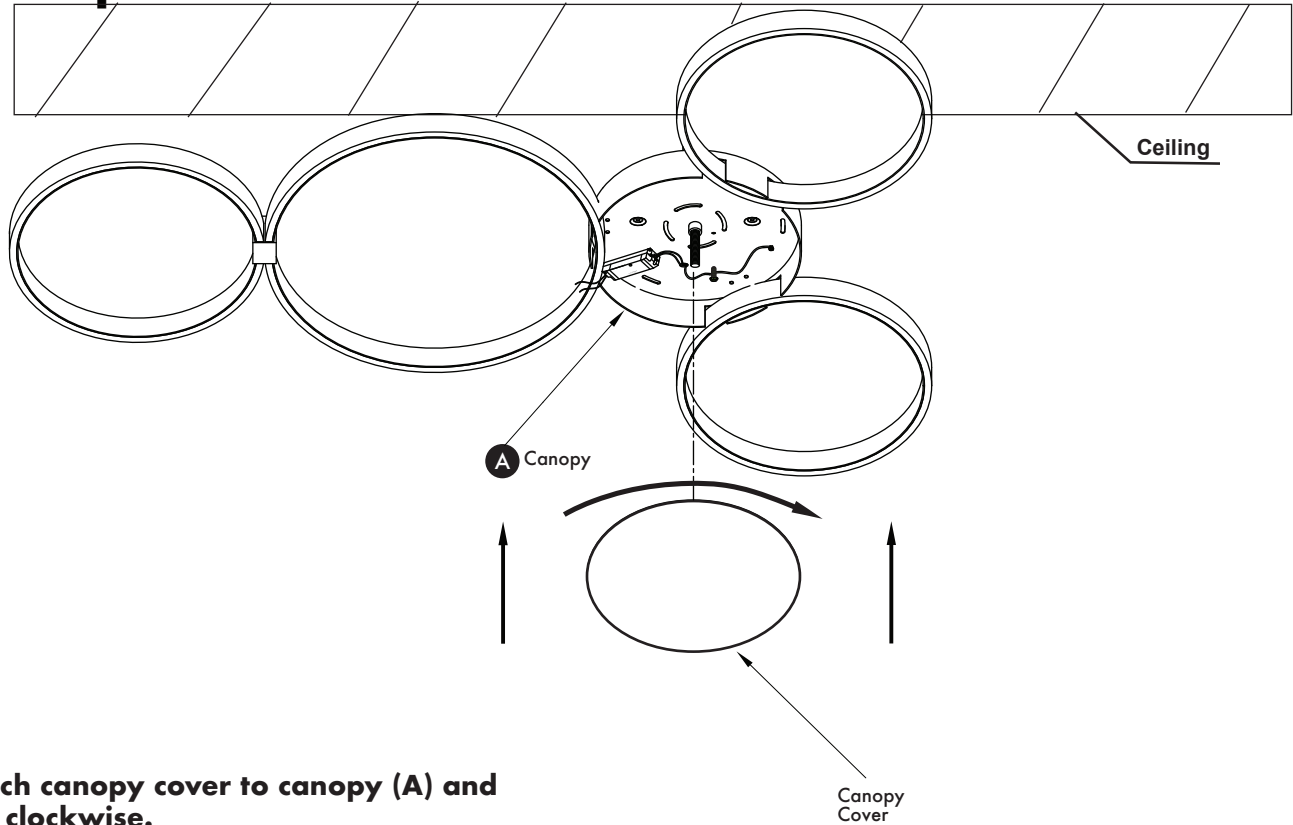


Attach canopy cover to canopy (A) and turn clockwise.




Step 5. Turn Power ON

Turn electricity "ON" at main fuse box.
Place the single pole switch in the "ON" position to test the fixture.

Circuit Box

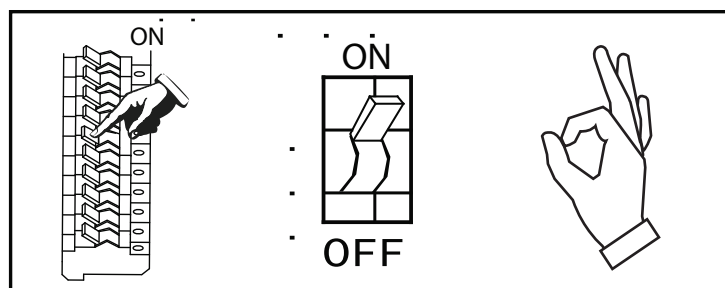

Step 2. Install Mounting Bracket

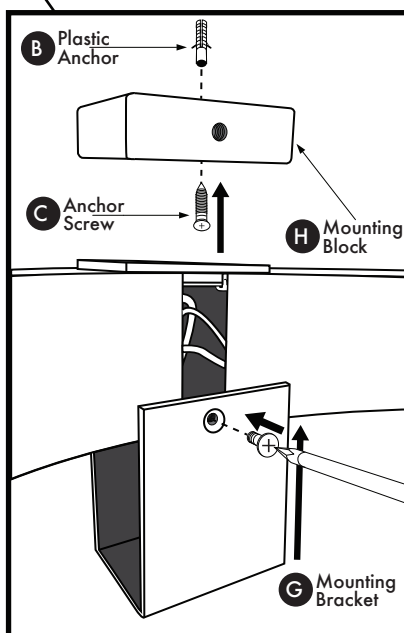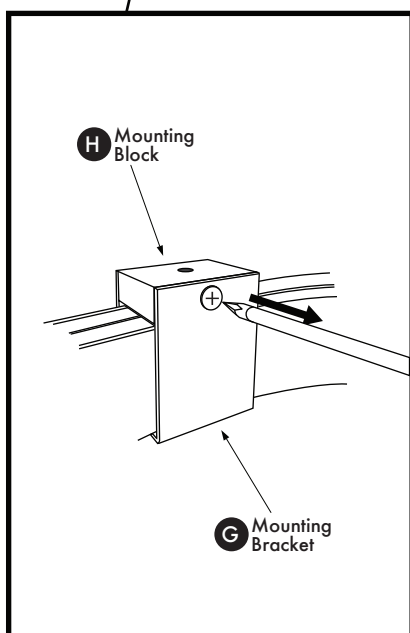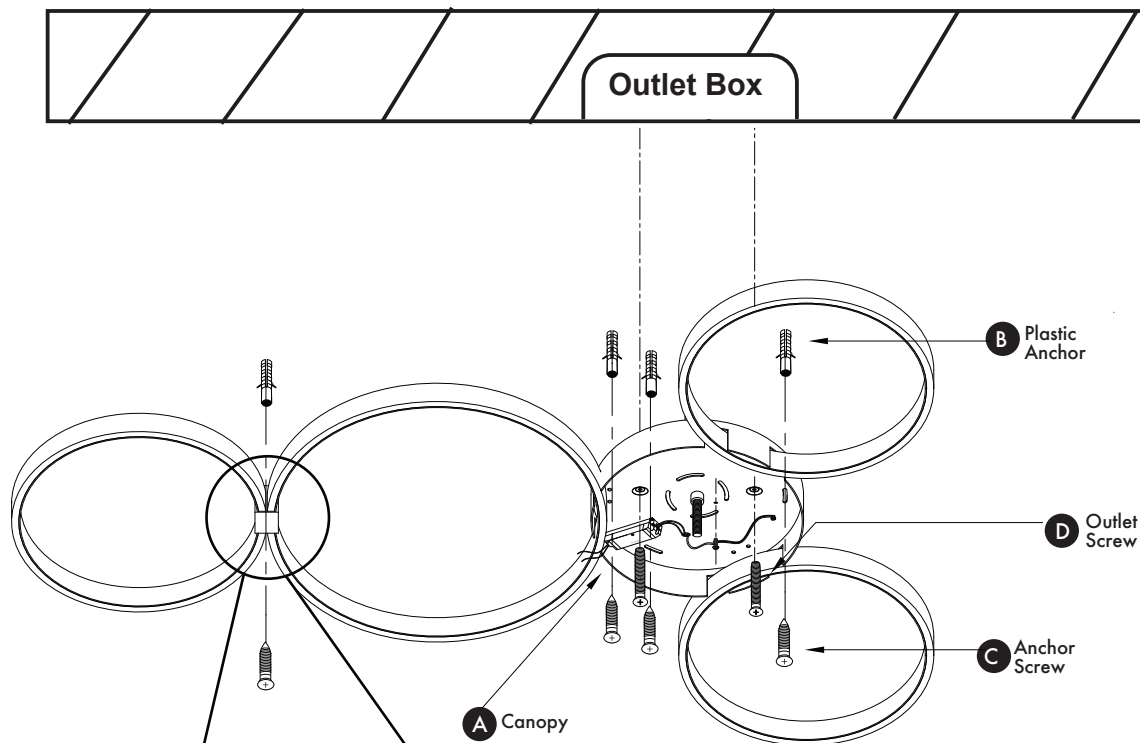


Remove mounting bracket (G) & mounting block (H) from fixture.

Insert plastic anchor (B) in drilled hole.

Attach mounting block (H) to ceiling and secure with anchor screw (C).

Attach mounting bracket (G) to fixture and secure to mounting block (H).

Step 3. Connect Wires

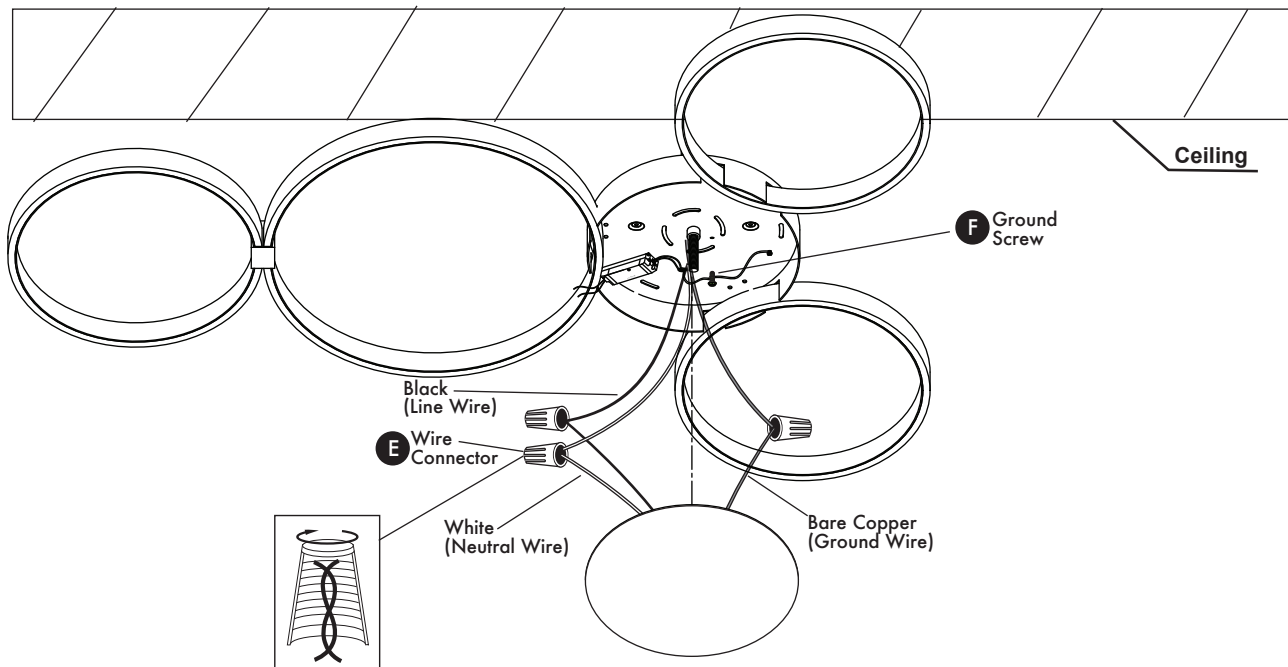

Supply Wires:

Connect Black (Line Wire) from fixture to Black (Hot Wire) from outlet box.

Connect White (Neutral Wire) from fixture to White (Neutral Wire) from outlet box.

Ground Wires:

Connect Bare Copper (Ground Wire) from fixture to Green or Bare Copper (Ground Wire) from outlet box.

Twist wires together clockwise and secure with wire connector (E).

Installer Tip: If ground wire is not available in outlet box, then secure Bare Copper (Ground Wire) from fixture to ground screw (F) on mounting bracket (A).