

IMPORTANT!!! BEFORE YOU BEGIN

 Inspect the product immediately upon receipt for transit damage,missing parts or manufacturing faults.
Handle the product with care and protect against knocks to all sides and edges of the glass.
Fixings supplied are for use in solid walls,hollow or stud walls will require specialist fixings available from your hardware supplier
Make sure that you have all the tools you need to complete the job (SEE BELOW)

5. Ensure there are no hidden pipes or cables in the wall before drilling.

6.If drilling holes in ceramic tiles use a piece of masking tape on the tile to stop the drill bit from slipping.

ERECTING TOOL



AFTERCARE INSTRUCTIONS

Clean using a soft dry cloth only when turned off.Never use cleaning agents or abrasive materials.Do not allow moisture to come into contact with the lamps.

ELECTRICAL SAFETY INSTRUCTIONS

All connections must be installed by a licensed electrician, in accordance with current building codes. Consult a qualified electrician.

IMPORTANT

Always switch off the electrical supply at the main during installation and maintenance.It is recommended that the circuit breaker is switched off for the necessary circuit before installation commences.Fitting in Bathrooms is subject to the appropriate building code Regulations.This product is NOT suitable for outside zones.It is also NOT suitable for installation in saunas,steam rooms or shower cubicles.This product is only suitable for permanent installation.DO NOT connect to a trailing plug and socket outlet.This product is only suitable for indoor use. DO NOT attach the product to surfaces that are damp or otherwise electrically conductive.

INSTALLATION CARE & SAFETY

Wear suitable eye protection when drilling.Take care when using power tools.Beware of hidden cables or pipes.Take care if drilling on tiled surfaces in case the drill slips.A piece of masking tape applied to the wall before marking out the fixing holes will stop the drill from wandering.

IMPORTANT!!!

DO NOT strike glass components with hard or pointed items.DO NOT place very hot or very cold items against or in close proximity to glass surfaces unless an adequately thick insulation materal is used to prevent such items coming in contact with the glass.The nominalthickness of the mirror glass used in this product is 1/8" and is film backed for safety. If the glass becomes chipped or broken replace immediately.

804336R-LED-MC

804320R-LED-MC 804348R-LED-MC 804324R-LED-MC 804360R-LED-MC

CLEANING

It is recommended that the unit is cleaned with a soft,dry,non abrasive cloth when turned off.Never use cleaning agents or abrasive materials on any type of surface fnish.DO NOT allow moisture to come into contact with the electrical components.

INSTALLATION INSTRUCTIONS

Switch off the electrical supply at the mains before beginning
Using the template, mark the wall with a pencil.
Ensure that the mirror cabinet is level and check there are no hidden pipes or cables before drilling.
Wearing suitable eye protection, drill 4holes using a 6mm drill bit and fix the wall plugs and screws in place leaving the end ofthe screw head protruding from the wall.
Make the electrical connections in accordance with current IEE wiring regulations. If in doubt consult your electrician.
Carefully hang the mirror.
Switch on the mirror lights.


Installation Instructions:

The first step is to make the electrical connection from the mirror to the mains supply. Use the connection wire found at the rear pf the mirror to make the necessary connections. A second person will need to hold the mirror in place whilst electrical connections are made.

Assembly instruction for recess installation.


1.Adjusting part.

2. Regulating gate link

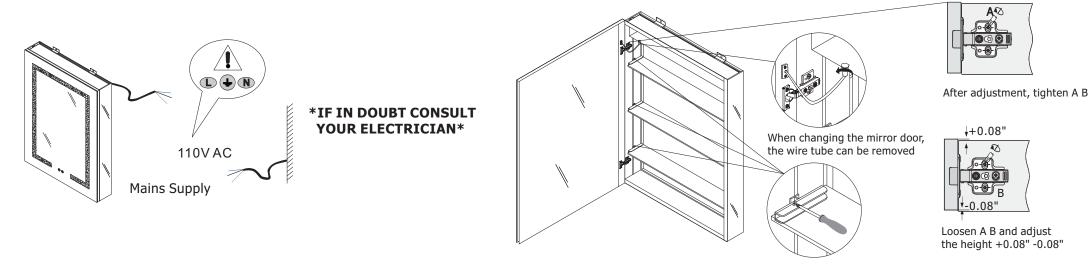

Adjust the glass laminate

Exploded view

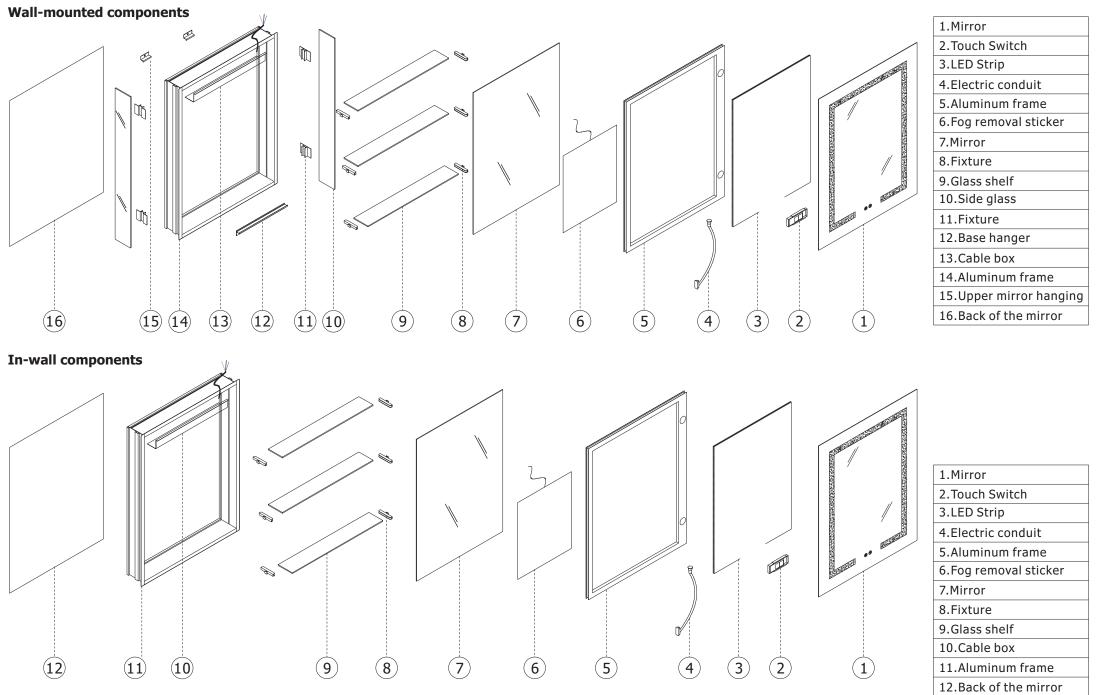

INSTALLATION INSTRUCTIONS

It IS HIGHLY RECOMMENDED THAT TWO PEOPLE INSTALL THE CASE TOGETHER


Before making any electrical connections it is necessary to turn off, the main electricity supply. This unit is provided with a supply cable already fitted.

Assembly instruction for wall mount installation

1.Measure the length, width, depth of back of cabinet for wall mount

2. Fix the screws of the supporting bracket at the desired location.


3. With the cabinet mounted at the supported bracket, mark the location of the top slideable brackets and fix the screws. Hint: The electrical supply must be connected befor fixing the top brackets.

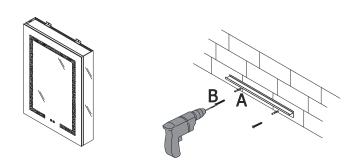


Insert installation instructions

1. Measure the length, width, depth of back of cabinet for wall mount,

2.Disassembly uni.(Side glass, Fixture, Base hanger, Upper mirror hanging)3.Place the mirror cabinet on the wall arranged in advance and fix the screws.Hint: The electrical supply must be connected before fixing the top brackets.

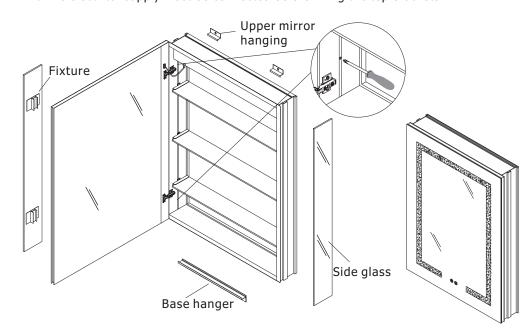

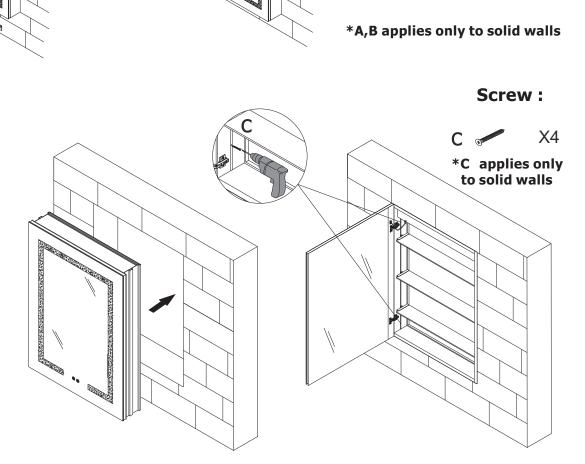

Screw:

Α

B


X4


X4

Recessed Opening Dimensions

804348R-LED-MC





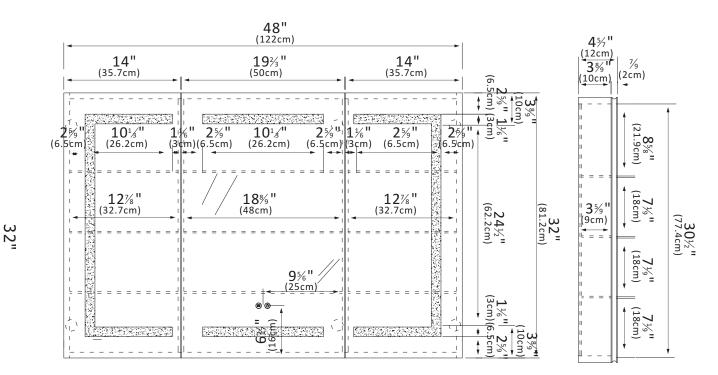

804320R-LED-MC

•20 W×4½ D×32H •50.8 W×12 D×81.2 H cm

> 20" (50.8cm)

> > 18½"


1000

(47cm)

80




•24 W×45 D×32 H •61 W×12 D×81.2 H cm




804336R-LED-MC

•36 W×4½ D×32 H •91.4 W×12 D×81.2 H cm



804360R-LED-MC

•60 W×45 D×32H •152.4 W×12 D×81.2 H cm

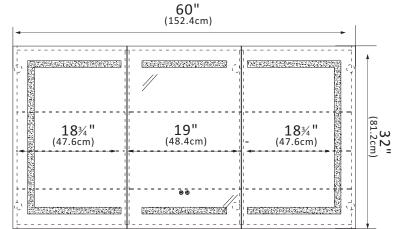

Page 4

643657