


Features

- Silestone Quartz surface
- Includes Robern ceramic lavatory and proprietary Robern mounting brackets
- Includes installation hardware and silicone
- Handleless ergonomic continuous drawer
- Includes 1 glass center bin
- Includes 2 fully adjustable glass drawer dividers
- 8" Widespread faucet holes



Dimensions

- Width:** 31" (787 mm)
- Depth:** 22" (559 mm)
- Overall Height:** 15-3/4" (400 mm)
- Top Thickness:** 3/4" (2 cm)
- Top Overhang (side):** 7/16" (11 mm)
- Top Overhang (front):** 1/4" (6.3 mm)

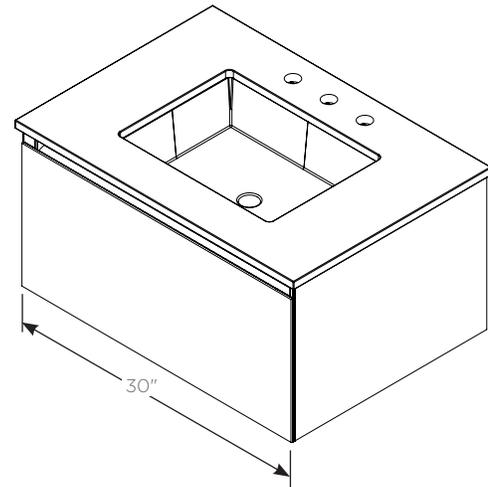

Construction

- All aluminum and glass construction - designed for disassembly and recycle, aluminum structural frame and drawer sides, glass drawer front, and safety backed glass drawer bottom
- Heavy duty, full extension, soft close drawer slides
- Glass front and side kits are replaceable
- Industrial grade installation hardware

Codes/Standards Applicable

- Night Light Option is ETL certified to:
 - UL 2108
 - CSA Standard C22.2 No. 12
- Electric outlet accessory is ETL certified to:
 - UL 1363
 - CSA Standard C22.2 No. 21

Options

- Other widths available - 24" (613 mm) / 36" (918 mm)
- Integrated LED night light (L) - Light bar built into top frame provides drawer illumination

Model Number Key

30 1194 00 T B 00001


Width	30 = 30" (765 mm) vanity
Top Color	1194 = Tinted Gray Mirror decorative glass with Lyra Top 2191 = White decorative glass with Stone Gray Top 2792 = Matte Gray decorative glass with White Storm Top
Night light	T = Top vanity night light N = No night light
Number of Drawers	00001 = 1 drawer

Electrical System


- Night light option - 12VDC plug-in transformer
Locate wall outlet as per installation instructions 209-1274
- In-drawer 3 outlet and switch box option - plug-in cord
120VAC 20A outlet - GFCI protected

Optional Accessories


- In drawer electrical outlets (VAELECTRIC21)
- Assorted glass bins:
 - Divided storage (GLASSBIN6.38)
 - Small (GLASSBIN3.25)
 - Medium (GLASSBIN5.25)
 - Large (GLASSBIN8.5)
- Accessory night light (CLEDS30)

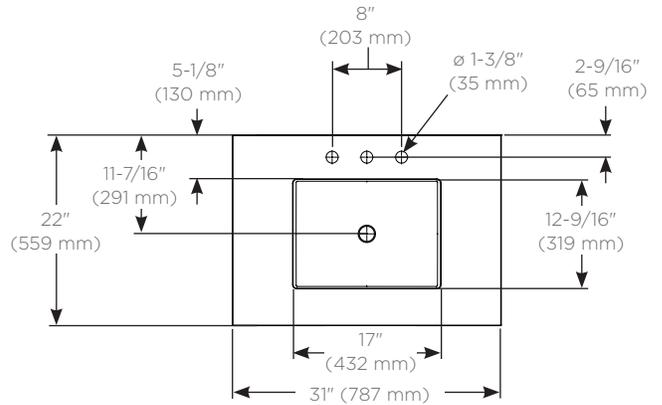


Top View of Sink and Top

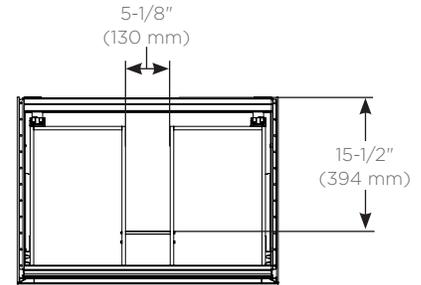

Top view for plumbing

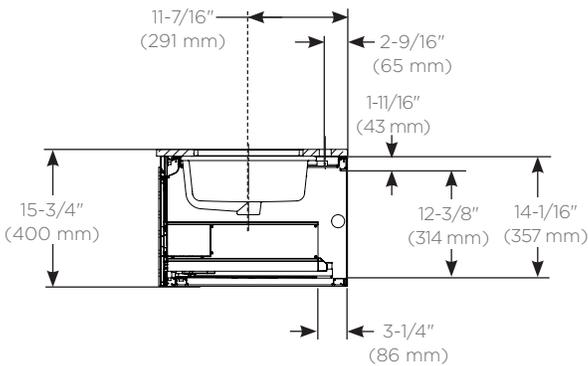

Side view for plumbing

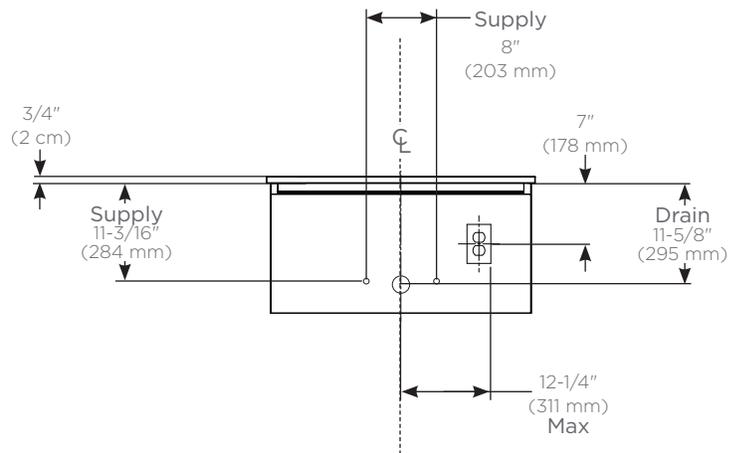

Front view

Installation Notes

Install this product according to the installation guide 209-1274.

- Special site preparation is required. Wall bracing and Robern supplied hardware are recommended.
- The plumbing must be roughed into the plumbing cutout area of the vanity. Refer to the sink rough-in and the vanity rough-in for proper placement. The water supply and drain lines must be installed before installing the vanity.