

Project:

Type:

Quantity:

Note:

SKU#: MLO - 36V - \_ - \_ - 30K - \_

## Description

A tubular frosted acrylic diffuser paired with a stamped steel backplate adds contemporary styling to any space.

## Features

- Stamped Steel construction
- Standard Finish: SN - Satin Nickel
- Frosted acrylic tube diffuser
- Driver located in junction box
- Damp location rated
- JA8-2016 Listed



**QUICK  
SHIP** | AVAILABLE  
IN 2 WEEKS

Shallow Backplate  
Satin Nickel  
Option Only


## Specifications

- Color Rendering Index: 90 CRI
- LED Color Temperature: 3000K (standard)
- Fixture Wattage: 21W
- Input Voltage: 120 VAC 50/60Hz
- Delivered Lumens: 1780 Lm (measured at 3000K)
- Fixture Weight: 4.8lb. (2.17kg)
- Standard Backplate: S4 - 4.6" x 4.6" x .5"
- Dimming: TRIAC dimmable
- For recommended dimmers, see <http://blackjacklighting.com>

## Options

- Upgradeable to 120-277V input driver with Universal Dimming
- Available in 2700K, 3000K, 3500K, and 4000K Color Temperatures
- Special Order Paint Finishes: BZ - Bronze, SG - Satin Gold, or BL - Matte Black
- Optional Deep Backplate (DB) - 4.6" x 4.6" x 1.3"

## Dimensions

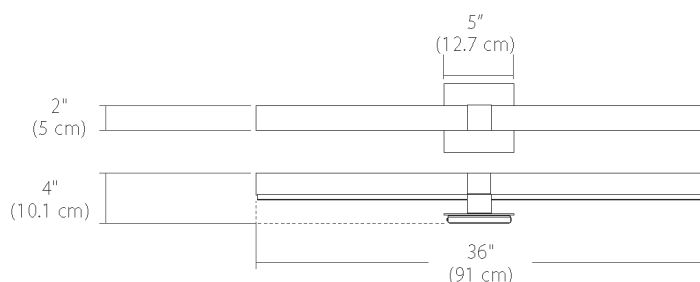

(Shown above with standard S4 blackplate)

## Fixture



MLO-36V-SN-12T-30K-S4

## ORDERING GUIDE

Family	Size	Finish	Volts/Dimming	Color Temp.	Backplate
<b>MLO</b>	<b>36V</b>			<b>30K</b>	
MLO Milo	36V 36" Vanity	<b>Standard</b> PC Polished Chrome SN Satin Nickel <b>Special Order</b> BL Matte Black BZ Bronze SG Satin Gold	<b>12T</b> 120VAC TRIAC Dimming <b>27U</b> 120-277VAC Universal Dimming <b>(12T Standard)</b>	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>(30K Standard)</b>	<b>S4</b> 4.6" Shallow Backplate (Standard) (Driver located inside junction box) <b>DB</b> Deep Backplate (Driver located in backplate) <b>(S4 Standard)</b>

Example: MLO-36V-SN-12T-30K-S4

## Finishes

Finish	
SN	
BL	
BZ	
SG	

SN - Satin Nickel      BL - Matte Black      BZ - Bronze      SG - Satin Gold

Standard Finish      Special Order Powder Coat Finishes

## Volts/Dimming

Volts/Dimming	
12T	
27U	

12T: Input: 120V , Dimming: TRIAC (Standard)

27U: Input: 120-277V , Dimming: TRIAC/ ELV/ 0-10V (Special Order)

## Color Temperature

Color Temp.	
27K	
30K	
35K	
40K	

27K - 2700K

30K - 3000K (Standard)

35K - 3500K

40K - 4000K

## Backplates

Backplates	
S4	
DB	

Standard Backplate      Special Order Backplate

S4 - 4.6" Shallow Backplate (4.6" H, 4.6" W, .5" D) - Driver located inside junction box

DB - Deep Backplate (4.6" H, 4.6" W, 1.3" D) - Driver located inside backplate