




Contemporary Lighting

PRODUCT NAME: Kriss Kross

ITEM NUMBER: E20691-PC

Please consult your electrician for hanging fixture and wiring.

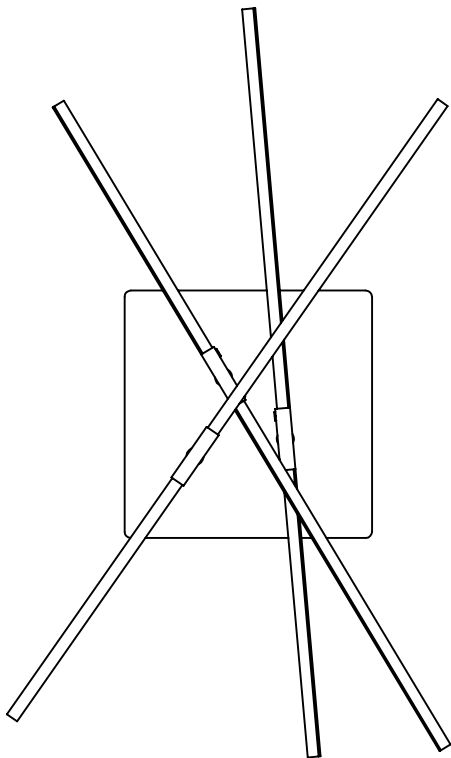

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.


Below is a list of recommended dimmers:

Lutron MACL-153M
Lutron DVL-153P
Lutron SCL-153P
Leviton IPL06-10Z
Leviton 6674-POW


Due to the inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur

IMPORTANT: Turn OFF the power at the main fuse or circuit breaker box before starting installation




(A)
Mounting Bracket



(B)
Back Plate




(C)
Back Plate Screws



(D)
LED Strip Assembly

Locate all hardware & components before discarding packaging

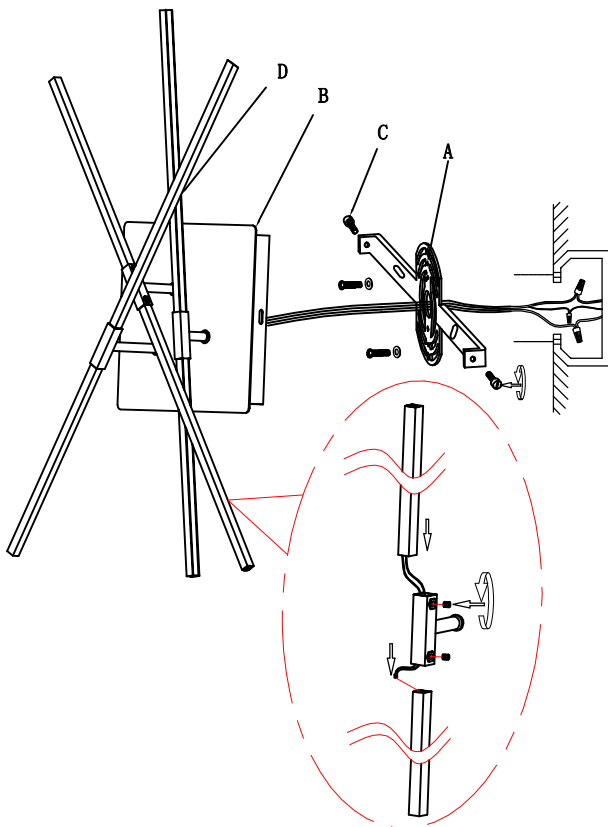


LED Strip H L=13' 8PCS
I L=9.6' 8PCS

Cleaning & Care:


Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.

1.)

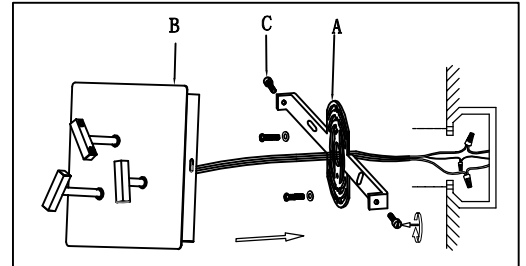


Step 1: Remove mounting bracket (A) from back plate (B) and install to electrical box.
Wire fixture to wires in outlet box. Green wire is for Ground.

2.)

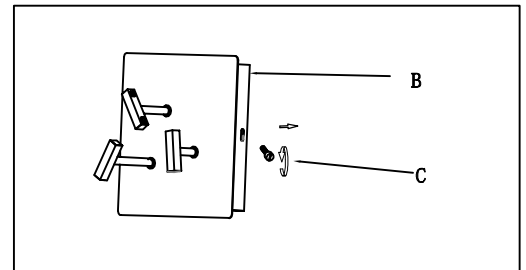

Step 2: Secure back plate (B) to wall using screws (C) provided.

3.)

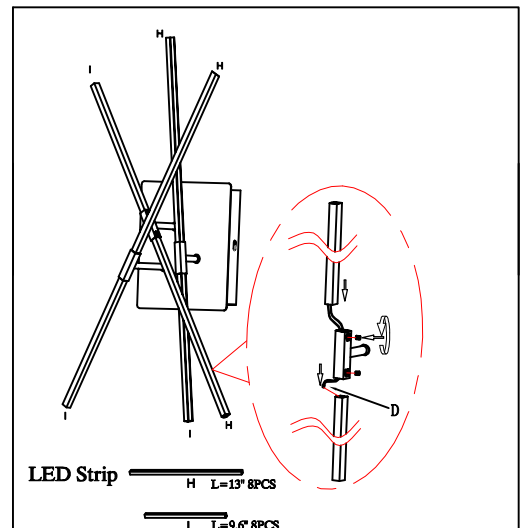

Step 3: Look at detailed LED Assembly inside bubble.
First connect LED strip using quick connect (D). Run the LED strips through extruded steel; each "T" connects to a long (H) LED Strip and shorter (I) LED Strip. Lastly, attach LED strips to "T" component using provided Allen screws.