

Project:

Type:

Quantity:

Note:

SKU#: NAN - 14S -      -      - 30K -     

## Description

The Nano sconce represents extraordinary value. Super-efficient LED light sources inside minimal geometric forms illuminate the white frosted acrylic diffuser.

## Features

- Stamped Steel construction
- Frosted acrylic extruded diffuser
- Driver located inside fixture's back plate
- Damp location rated
- JA8-2016 Listed



**QUICK SHIP** | AVAILABLE  
IN 2 WEEKS

Deep Backplate  
Standard Finish  
12T Triac Dimming  
Option Only

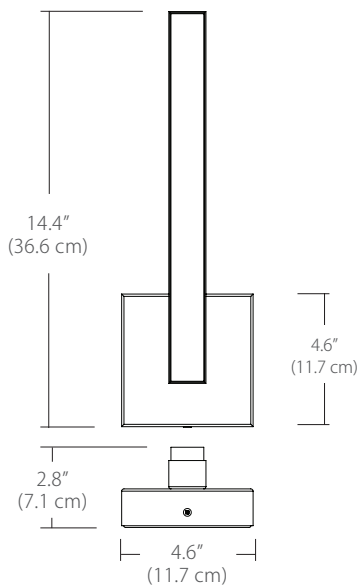
## Specifications

- Color Rendering Index: 90CRI
- LED Color Temperature: 3000K (standard)
- Fixture Wattage: 14W
- Input Voltage: 120VAC 50/60Hz
- Delivered Lumens: 757 Lm (measured at 3000K)
- Fixture Weight: 2.3 lb. (1.1 kg)
- Standard Backplate: Deep Backplate (DB) - 4.6"H x 4.6"W x 1.3"D
- Dimming: TRIAC dimmable
- For recommended dimmers, see <http://blackjacklighting.com>

## Options

- Available in 2700K, 3000K, 3500K, and 4000K color temperatures
- Upgradable to 120-277V input driver with Universal Dimming (only available with standard Deep Backplate in standard finish)
- Standard Finishes: PC - Polished Chrome or SN - Satin Nickel
- Special Order Powder Coat Finishes: BL - Matte Black, BZ - Bronze, or SG - Satin Gold
- Optional Shallow Backplate: S4 - 4.6"H x 4.6"W x .5"D

## Dimensions



(Shown above with Deep 4.6" Backplate)



**Shown Above:**







NAN-14S-SN-12T-30K-SO-DB

## ORDERING GUIDE


Family	Size	Finish	Volts/Dimming	Color Temp.	Backplate
<b>NAN</b>	<b>14S</b>			<b>30K</b>	
NAN Nano	14S 14" Sconce	<b>Standard</b> <b>PC</b> Polished Chrome <b>SN</b> Satin Nickel <b>Special Order</b> <b>BL</b> Matte Black <b>BZ</b> Bronze <b>SG</b> Satin Gold	<b>12T</b> 120VAC TRIAC Dimming <b>27U</b> 120-277VAC Universal Dimming (Only available with DB backplates) <b>12T Standard)</b>	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>(30K Standard)</b>	<b>DB</b> Deep Backplate (Standard) (Driver located in backplate) <b>S4</b> 4.6" Shallow Backplate (Driver located inside junction box) <b>(DB Standard)</b>

**Example:** NAN-14S-BZ-12T-30K-SO-S4


## Finishes

Finish					
					
PC SN BL BZ SG	PC - Polished Chrome	SN - Satin Nickel	BL - Matte Black	BZ - Bronze	SG - Satin Gold
	Standard Finishes		Special Order Powder Coat Finishes		


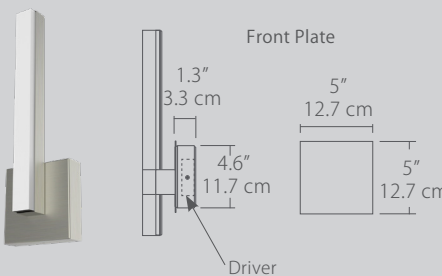
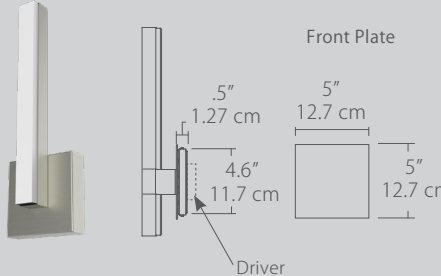
## Volts/Dimming

Volts/Dimming	
	
12T 27U	<p><b>12T:</b> Input: 120V , Dimming: TRIAC (Standard)</p> <p><b>27U:</b> Input: 120-277V , Dimming: TRIAC/ ELV/ 0-10V (Special Order) (Only available with DB - Deep backplate)</p>

## Color Temperature

Color Temp.	
	
27K 30K 35K 40K	<p><b>27K</b> - 2700K</p> <p><b>30K</b> - 3000K (Standard)</p> <p><b>35K</b> - 3500K</p> <p><b>40K</b> - 4000K</p>

## Backplates

Backplates		
		
DB S4	 <p><b>DB</b> - Deep Backplate - (4.6"H, 4.6"W, 1.3"D) Driver located inside Backplate</p> <p><b>Standard Backplate</b></p>	 <p><b>S4</b> - Shallow 4.6" Backplate - (4.6"H, 4.6"W, .5"D) Driver located inside J-Box</p> <p><b>Special Order Backplate</b></p>