

Project:

Type:

Quantity:

Note:

SKU#: MLO - 24V - - - 30K -

Description

A tubular frosted acrylic diffuser paired with a stamped steel backplate adds contemporary styling to any space.

Features

- Stamped Steel construction
- Standard Finish: SN - Satin Nickel
- Frosted acrylic tube diffuser
- Driver located inside junction box
- Damp location rated
- JA8-2016 Listed



QUICK SHIP | AVAILABLE IN 2 WEEKS

Shallow Backplate
Satin Nickel
Option Only


Specifications

- Color Rendering Index: 90 CRI
- LED Color Temperature: 3000K (standard)
- Fixture Wattage: 21W
- Input Voltage: 120 VAC 50/60Hz
- Delivered Lumens: 1280 Lm (measured at 3000K)
- Fixture Weight: 1.9 lb. (.88 kg)
- Standard Backplate: S4 - 4.6" x 4.6" x .5"
- Dimming: TRIAC dimmable
- For recommended dimmers, see <http://blackjacklighting.com>

Options


- Upgradeable to 120 -277V input driver with Universal Dimming (TRIAC / 0-10V / ELV)
- Available in 2700K, 3000K, 3500K, and 4000K Color Temperatures
- Special Order Paint Finishes: BZ - Bronze, SG - Satin Gold, or BL - Matte Black
- Optional Deep Backplate (DB) - 4.6" x 4.6" x 1.3"

Dimensions

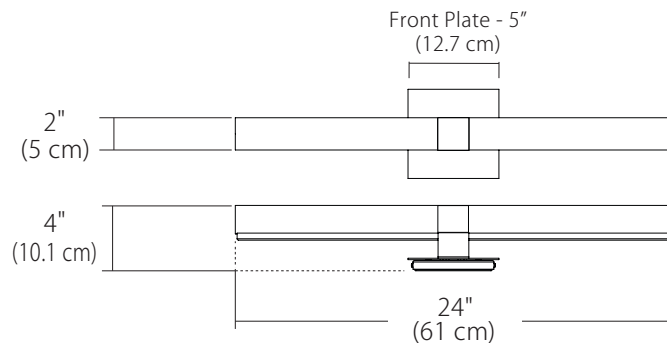

(Shown above with standard S4 blackplate)

Fixture

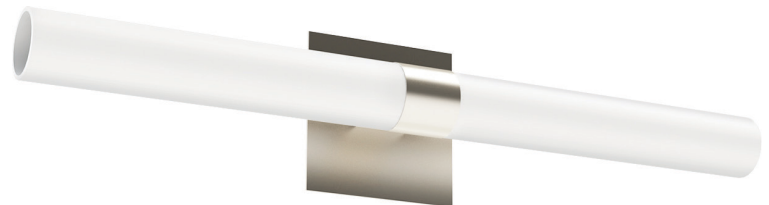

MLO-24V-SN-12T-30K-S4

ORDERING GUIDE

Family	Size	Finish	Volts/Dimming	Color Temp.	Backplate
MLO	24V			30K	
MLO Milo	24V 24" Vanity	Standard SN Satin Nickel Special Order BL Matte Black BZ Bronze SG Satin Gold	12T 120VAC TRIAC Dimming 27U 120-277VAC Universal Dimming (12T Standard)	27K 2700K 30K 3000K 35K 3500K 40K 4000K (30K Standard)	S4 4.6" Shallow Backplate (Standard) (Driver located inside junction box) DB Deep Backplate (Driver located in backplate) (DB Standard)

Example: MLO-24V-SN-12T-30K-S4

Finishes

Finish				
				
SN				
BL				
BZ				
SG				
	SN - Satin Nickel		BL - Matte Black	
			BZ - Bronze	
			SG - Satin Gold	
	Standard Finish		Special Order Powder Coat Finishes	



Volts/Dimming

Volts/Dimming	
	
12T	12T: Input: 120V , Dimming: TRIAC (Standard)
27U	27U: Input: 120-277V , Dimming: TRIAC/ ELV/ 0-10V (Special Order)

Color Temperature

Color Temp.	
	
27K	27K - 2700K
30K	30K - 3000K (Standard)
35K	35K - 3500K
40K	40K - 4000K

Backplates

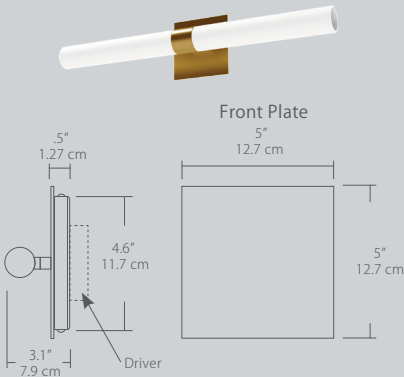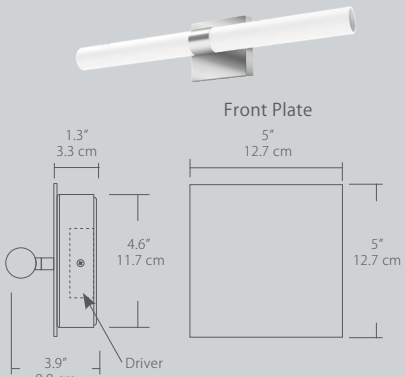Backplates	
	
S4	
DB	
	
	Standard Backplate
	Special Order Backplate
	S4 - 4.6" Shallow Backplate (4.6" H, 4.6" W, .5" D) - Driver located inside junction box
	DB - Deep Backplate (4.6" H, 4.6" W, 1.3" D) - Driver located inside backplate