dogberry
Sliding Barn Door - Suggested Installation Instructions

84"

17 3/4" | 17 3/4" | 17 3/4" | 17 3/4"

2" minimum

H + 1 5/8"

H

3/8"

IMPORTANT!

Before begining installation, please read through all of the suggestions and measurements provided in this document. They are guidelines, and may require modification based on your specific situation. Though it can be done yourself, a contractor is recommended.

Ø1/4"   Ø3/16"
Ø3/8"

washers
spacers   (x5)
(x5)
(x1)

track
(x1)

anti-jump discs
(x2)

plugs
(x4)

rollers

door stops
(x1)   (x1)

(x1) optional T floor guide   (x1) U channel floor guide

lag screws
ST5/16 "X3 ½ " (x 5)
with optional drywall anchors

M10x55mm (x4)
for 35-40mm door

ST5/32"x1"(x 2)

(x2)   Ø1/4"(x2)

1
Determine where your track will be located, then mark and pre-drill holes.

17 3/4" | 17 3/4" | 17 3/4" | 17 3/4"

1 - Mark a level line at the correct height (H + 1 5/8").

2 - Find location of studs in your wall. (NOTE: If studs cannot be found at spacing where track is to be installed, it is recommended to install a header board.)

3 - Mark and pre-drill holes corresponding to the location of studs along the level line.

2"
Ø3/16"

H + 1 5/8"

NOTE:
H = height of your barn door in inches

3
Drill holes in door and attach rollers.

drill out
Ø3/8"

1 3/4"
3 1/2"

1 3/8"

2
Install track by driving lag screws through washers, track, and spacers.

Stops can be placed on either side of outer holes.

4
Attach anti-jump discs on top of door.

After attaching anti-jump discs on top of door, rotate them toward the front side of door.
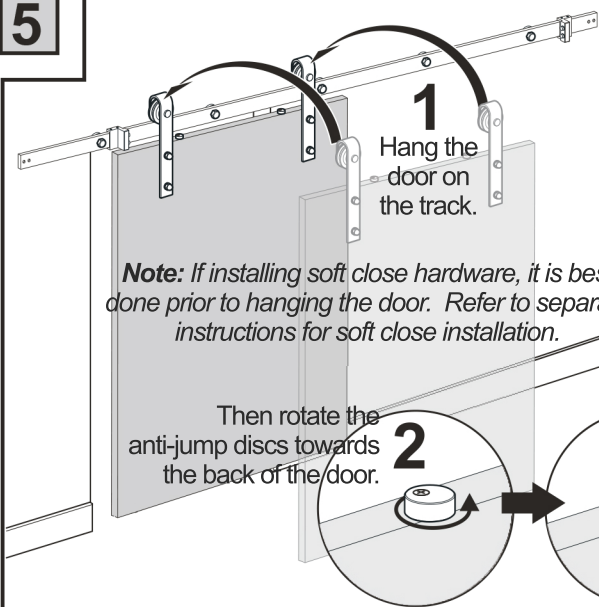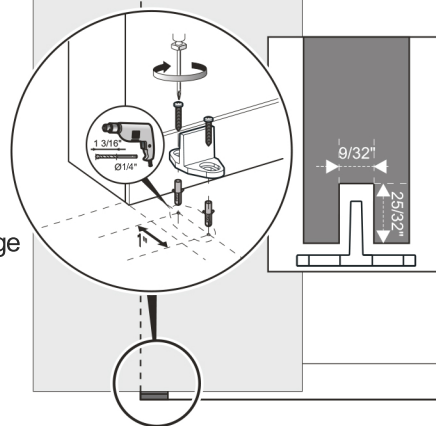
5

1 Hang the door on the track.

Note: If installing soft close hardware, it is best done prior to hanging the door. Refer to separate instructions for soft close installation.

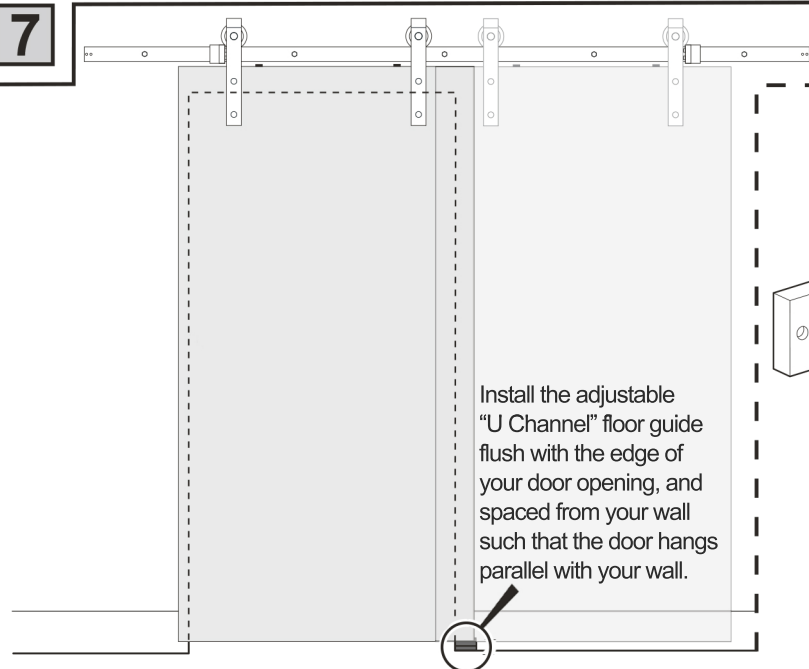Then rotate the anti-jump discs towards the back of the door. **2**

6

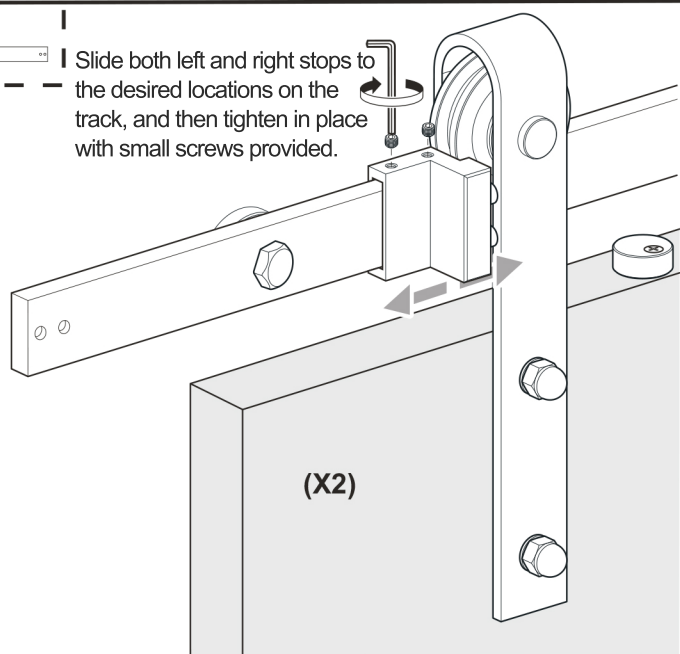If opting to use the "U Channel" floor guide, skip Step 6 and proceed to Step 7.

If opting to use the "T" floor guide, your contractor should route a groove in the bottom of your door and install "T" guide as shown in the image at right.
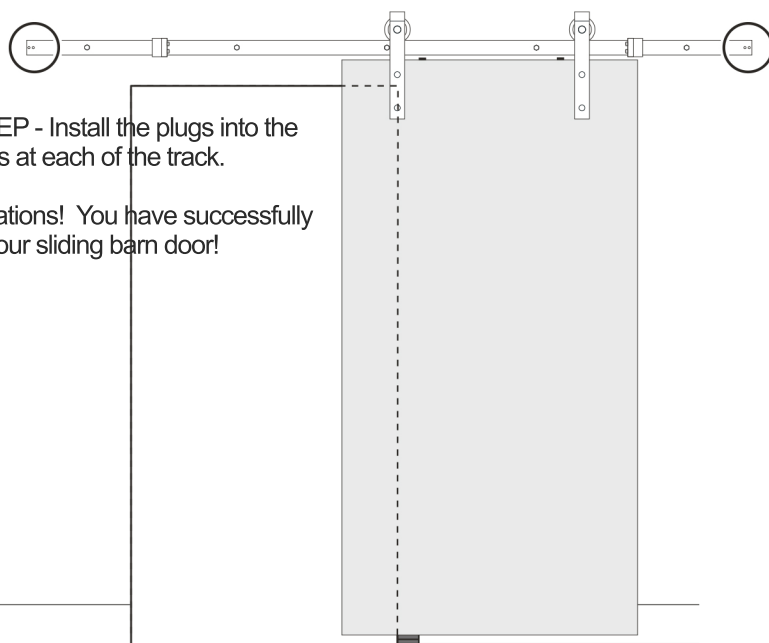
1 3/16"
Ø1/4"
1"

9/32"
25/32"

7

Slide both left and right stops to the desired locations on the track, and then tighten in place with small screws provided.

Install the adjustable "U Channel" floor guide flush with the edge of your door opening, and spaced from your wall such that the door hangs parallel with your wall.

(X2)

8

FINAL STEP - Install the plugs into the small holes at each of the track.

Congratulations! You have successfully installed your sliding barn door!

(X4)