

## Wellworth® Classic

Pressure Lite® Toilet K-3505-RA

#### **Features**

- Vitreous china.
- Elongated bowl.
- Equipped with Sloan FLUSHMATE® Sloan® Valve Company.
- Polished chrome trip lever.
- Less seat and supply.
- 12" (305 mm) rough-in.
- 1.6 gpf (6.0 lpf).
- 12" (305 mm) x 10" (254 mm) water area.
- 30-1/2" (775 mm) x 21-1/4" (540 mm) x 29-3/4" (756 mm).

## **Recommended Products/Accessories**

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat K-5588 Purefresh® Elongated Toilet Seat K-4108 C3®-230 Elongated Cleansing Toilet Seat K-5420 Low-Profile Bolt Caps

## **Included Components**

Product consists of:

K-4303 Toilet Bowl

K-4645-RA Toilet Tank

Additional Components:

Bolt cap accessory pack

Equipped with Sloan FLUSHMATE® - Sloan® Valve Company

Tank accessory pack

Tank cover

Trip lever



### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond





# Wellworth® Classic

Pressure Lite® Toilet K-3505-RA

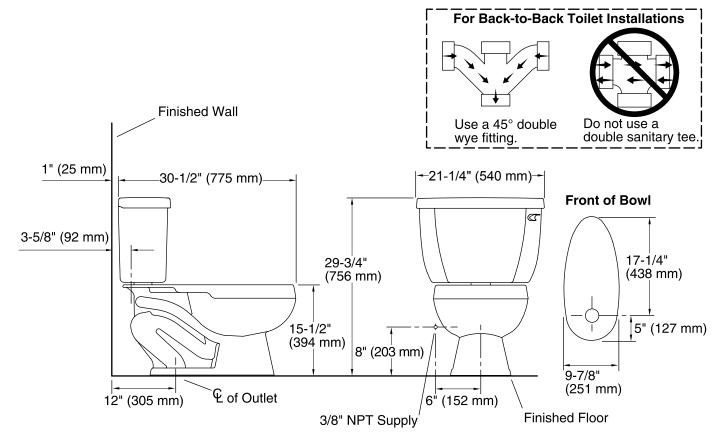

### **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: Pressure Lite®
Trap passageway: 2-1/4" (57 mm)

Water surface size: 12" x 10" (305 mm x 254 mm)

Rim to water surface: 5-5/8" (143 mm)
Rough-in: 12" (305 mm)
Seat-mounting holes: 5-1/2" (140 mm)

## Fixture Supply Requirements

Min static pressure: 20 psi (137.9 kPa) Max static pressure: 80 psi (551.6 kPa)

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

