
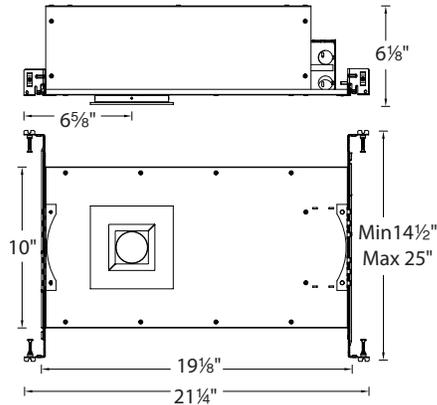
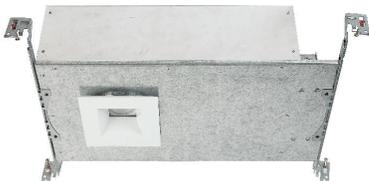


SUMMIT 2.0 3.5" AC-LED HR3S-IC

120V - IC-Rated, Airtight

WAC LIGHTING

Responsible Lighting®

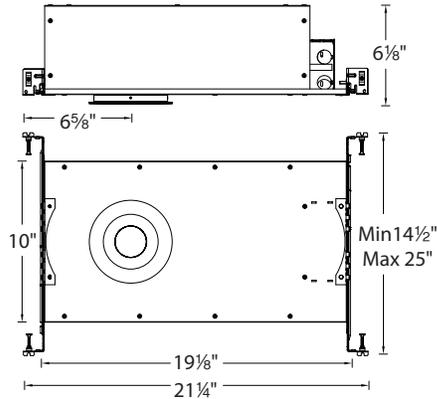

Fixture Type:

Catalog Number:

Project:

Location:

SPECIFICATIONS

Comparable: 50W MR16

Input: 120VAC 50/60HZ

Rated Life: Reported Life > 36,000 hrs*

Calculated Life = 50,000 hrs*

*Based on IES Tm21 Report

Construction: Die-cast trim Painted White.
Frame and hanger bars are heavy gauge galvanized steel.

J-Box: Seven knockouts. Rated for through branch wiring.
Wire connectors provides for ease of installation.

Driver: Uses AC-LED, no driver needed

Mounting: Supplied with hanger bars, adjustable from 14 1/2"-25"
to accommodate various joist construction and grid sizes. Hanger
bars include a captive mounting "screw-nail" for ease of installation.
Accommodates surfaces from 1/2"- 3/4" thick.
4 5/8" cutout hole.

Dimming: 100%-10% ELV Dimming

Compatible Dimmer: DVELV-300P, SELV-300P, RRD-6NA

Rating: IC-Rated

Standards: Energy Star®, ETL & cETL Listed for Wet Locations.

PRODUCT DESCRIPTION

3.5" AC-LED integral trim and housing


FEATURES

- Energy Star®
- Title 24 Compliant
- Wet Location Listed
- Frosted lens for glare control and optimal light distribution
- Includes housing and Trim
- Driver-free, 120V line voltage input
- Ceiling thickness: 1/2" - 3/4"

ORDER NUMBER

Model #	Power	Beam Angle	Color Temp	CRI	Lumen
HR3S-ICR30F-WT Round IC-Rated, Airtight New Construction	14.5W	45°	3000K	90	910
HR3S-ICS30F-WT Square IC-Rated, Airtight New Construction	14.5W	45°	3000K	90	895

PHOTOMETRY



HR3S-IC__30F-WT

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122




Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760

SUMMIT 2.0 3.5" AC-LED HR3S

120V - Non-IC-Rated, Airtight

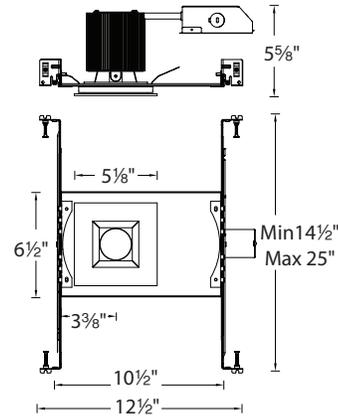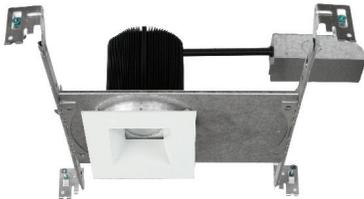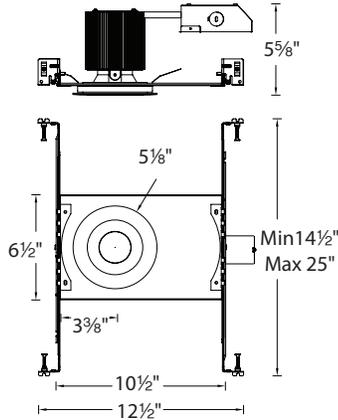

PRODUCT DESCRIPTION

3.5" AC-LED integral trim and frame kit

FEATURES

The one solution for your house

- One product for both new construction and remodel
- Energy Star®
- Title 24 Compliant
- Frosted lens for glare control and optimal light distribution
- Integral housing and Trim
- Driver-free, 120V line voltage input
- Ceiling thickness: 1/2" - 3/4"

ORDER NUMBER

Model #	Power	Beam Angle	Color Temp	CRI	Lumen	Note
HR3S-R30F-WT Round Non-IC, Airtight Remodel and New Construction	14.5W	45°	3000K	90	910	Insulation must be kept at least 3" away from the housing
HR3S-S30F-WT Square Non-IC, Airtight Remodel and New Construction	14.5W	45°	3000K	90	895	Insulation must be kept at least 3" away from the housing

HR3S-__30F-WT

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

WAC LIGHTING

Responsible Lighting®

Fixture Type:

Catalog Number:

Project:

Location:

SPECIFICATIONS

Comparable: 50W MR16

Input: 120VAC 50/60HZ

Rated Life: Reported Life > 36,000 hrs*
Calculated Life = 50,000 hours*
**Based on IES TM21 Report*

Construction: Die-cast trim Painted White.
Frame and hanger bars are heavy gauge galvanized steel.

J-Box: Two knockouts. Rated for through branch wiring.
Wire connectors provides for ease of installation.

Driver: Uses AC-LED, no driver needed

Mounting: Supplied with hanger bars, adjustable from 1 1/2"-25" to accommodate various joist construction and grid sizes. Hanger bars include a captive mounting "screw-nail" for ease of installation. Accommodates surfaces from 1/2"- 3/4" thick. 4 5/8" cutout hole.

Dimming: 100%-10% ELV Dimming

Compatible Dimmer: Lutron: *DVELV-300P, SELV-300P, RRD-6NA*

Rating: Non-IC-Rated: Insulation must be kept at least 3" away from the housing

Standards: Energy Star®, ETL & cETL Listed for Wet Locations.

PHOTOMETRY

