



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Ideal LED Overbed IDB Series

Features

Contemporary LED wall mount senior care overbed light. Choose from distinctive faux wood panels with a brushed nickel accent or brushed nickel finish. White frosted acrylic diffuser. The Ideal provides both ambient and task light with a four way pull switch, standard (120 volt only).

Construction

The wiring channel is formed from 22-gauge steel and is provided with mounting slots and wiring access. An internal divider provides separate lamp compartments for controlled up light and down light. Fixture can mount horizontally only. Power connections can be made in the fixture wiring channel or in a standard junction box (not included).

Finish

All faux wood parts are finished in Light Oak or Mahogany. All metal parts are finished in plated Brushed Nickel. Internal housing is finished in a lighting grade baked white enamel.

Diffuser

Diffuser is white frosted acrylic, 0.090" thick. Frame mounts to electrical channel with two decorative screws.

Electrical

Input 120VAC / 60 Hz.
Not compatible with dimmers.
Integrated four position pull switch (on up, on down, on both, all off) and single pull switch for nightlight.

LED

Integrated LED modules capable of producing:
36W = 4050 source lumens total
46W = 5400 source lumens total
Rated for 50,000 hours, 3000K (CCT), 90 CRI.
Provides 50 footcandles of reading light over bed.

Certification

All fixtures are cETLus listed for indoor damp locations.



Options (Consult Factory)

120-277V universal voltage available without switch and nightlight.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.

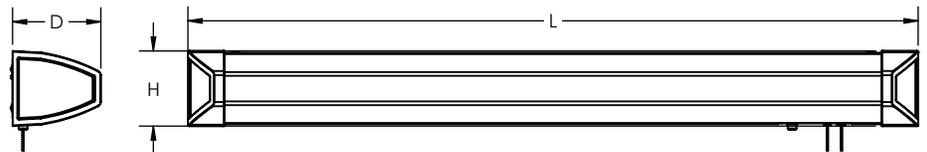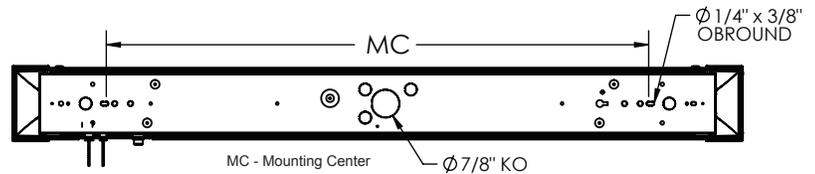

Ordering Information:

Brushed Nickel	Light Oak	Mahogany	LED	Source Lumens	CCT	L	H	D	MC
IDB394000L30ENBN	IDB394000L30ENLK	IDB394000L30ENMH	36W	1350 up/2700 down	3000K	39-7/8"	5-3/8"	6-1/4"	26-3/4"
IDB515400L30ENBN	IDB515400L30ENLK	IDB515400L30ENMH	46W	1800 up/3600 down	3000K	51-7/8"	5-3/8"	6-1/4"	38-3/4"