




PRODUCT NAME: Director Wall Mount  
ITEM NUMBER: 53035

Please consult your electrician for hanging fixture and wiring.

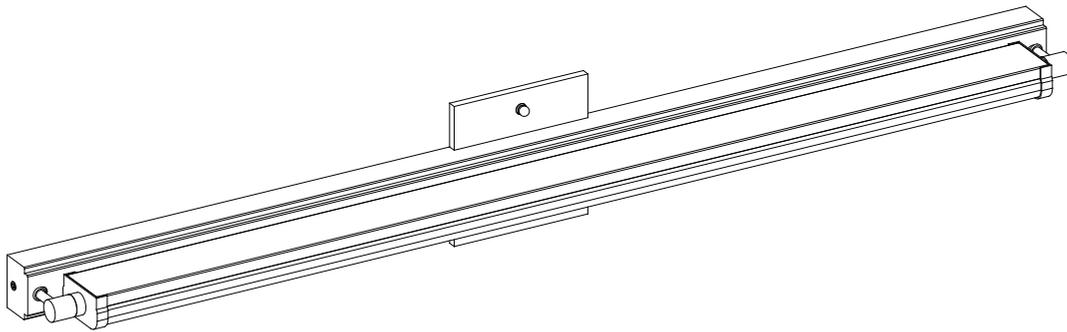


The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.  
Below is a List of Recommended dimmers:  
.Lutron MACL-153M  
.Lutron DVL-153P  
.Lutron SCL-153P  
.Leviton IPL06-10Z  
.Leviton 6674-POW  
Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

Bulb (included): 1xLED 45W

**IMPORTANT:** Turn off the power at the main fuse or circuit breaker box before starting installation



(A)  
Bracket



(B)  
Mounting Screws  
2Pcs



(C)  
Ball Nuts  
2Pcs





(D)  
Plastic Parts  
2Pcs




(E)  
Screws  
2Pcs

Locate all hardware & components before discarding packaging

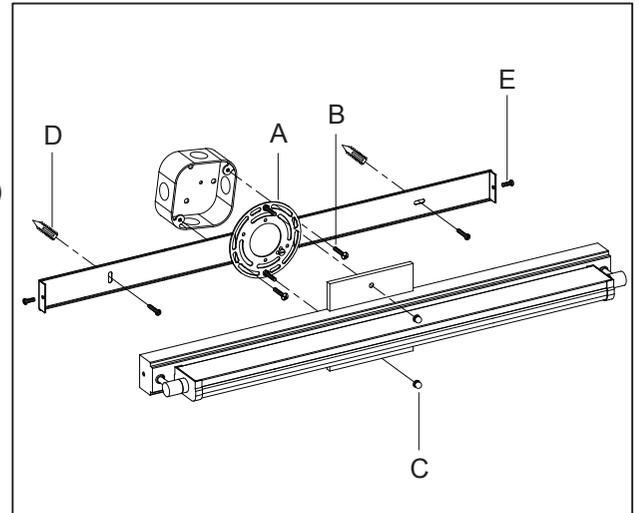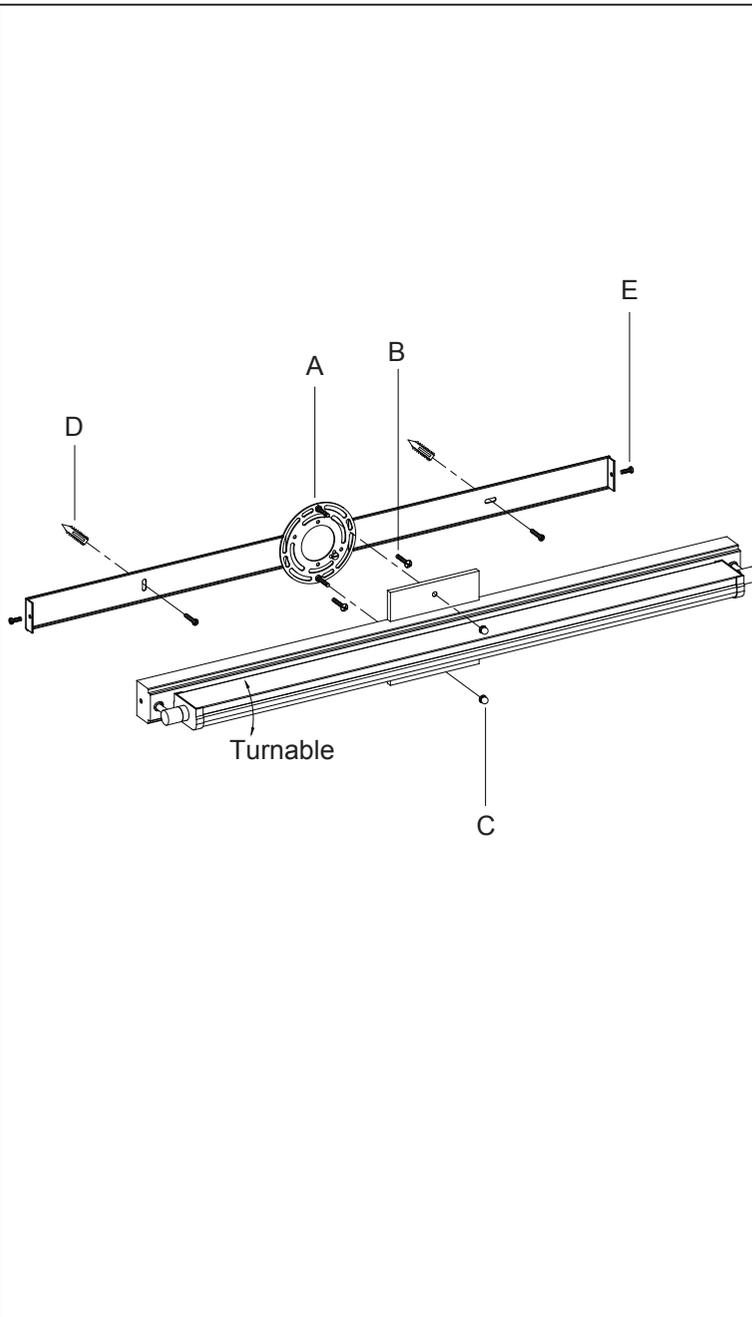

1.)

Step1: Remove mounting bracket from fixture and install to electrical box.

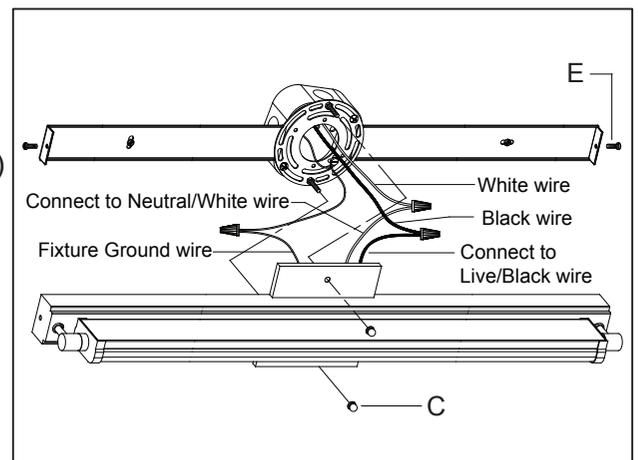

2.)

Step2: Wire fixture to wires in outlet box. Copper wire is for Ground. Attach canopy to mounting bracket and tighten with ball nuts (C), Screws (E).

**Cleaning & Care:**  
Clean with soft cloth and a mild detergent.  
Do not use abrasive cleaner.