










ASSEMBLY INSTRUCTIONS

3900093/3900094

| Item | Parts | Picture | Qty |
|------|------------|---|-----|
| 1 | Chair Body |  | 1 |
| 2 | Back Legs |  P1  P2 | 2 |
| 3 | Front Legs |  | 2 |

| Item | Hardware | Picture | Qty |
|------|---------------|---|-----|
| A | Bolt |  $\varnothing 5/16" \times 2"$ | 8 |
| B | Spring washer |  | 8 |
| C | Flat washer |  | 8 |
| D | Allen wrench |  | 1 |

Step 1 : Take out the hardware bag from the bottom of the seat.

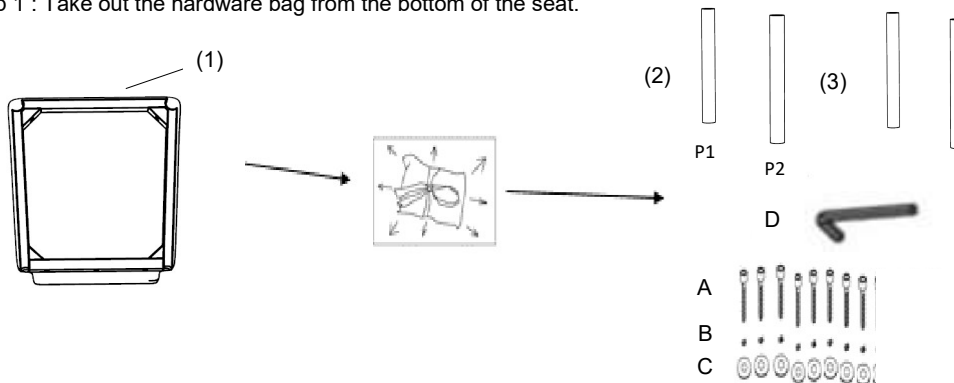

Step 2 : Using bolts (A), lock washers (B), flat washers (C) to connect front legs (3) and back legs (P1 and P2) to the bottom of the seat (1). Tighten bolts (A) with allen key (D). Repeat the step for other legs. Turn over the chair and put it on upright position.

