

LANDSCAPE LIGHTING

Fixture Type:

Catalog Number:

Project:

31/8"

Location:





PRODUCT DESCRIPTION

Landscape 2" recessed inground luminaire for up, down, side light applications.

FEATURES

2051

SPECIFICATIONS

Input:	9 - 15VAC (Transformer is required)
Power:	4.1W / 6.6VA
Brightness:	170 lm
Beam Angle:	25°
CRI:	85
Rated Life:	70,000 hours

ORDERING NUMBER

	Color Temp		Finish	
2051 Square	30	3000K	BS SS	Bronzed Stainless Steel Stainless Steel

IEC safety Standard	Walk over	Drive over
Resistance to static load test	Yes (1125lbs)	Yes (4496lbs)
Resistance to torque and shear loads test	N/A	Yes

2051-30____

Example: 2051-30SS

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 **Central Distribution Center** 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. MAR 2017

2" INGROUND - SQUARE

2051

LANDSCAPE LIGHTING

/AC



TESTED MAGNETIC LOW VOLTAGE(MLV) DIMMERS

Luminaire	Dimmer						
	Manufacturer	Family	Model	Power Rating	Range*	Note	
	Lutron	Diva	DVLV-600	600W	20% - 100%		
2051		Skylark	SLV-600P	600W	15% - 100%	Best performance	
		Skylark	S-10P	1000W		Not recommended	

*Low end of this range is determined by output current which may not directly translate to the perceived light output

WAC Lighting fixtures are compatible with a variety of dimmers. For your convenience we have included a compatibility chart showing dimmers which have been tested with our products. The recommended list below is based upon testing conducted in a lab, and the results can vary in certain field applications due to a number of factors. Exclusion from the list does not imply incompatibility, just that it has not been tested by WAC Lighting. Please reference the dimmer manufacturer's instructions for installation, or contact a WAC lighting professional at 800-526-2588.

Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

2" INGROUND - SQUARE

2052 Honeycomb Louver



LANDSCAPE LIGHTING

Fixture Type:

Catalog Number:

Project:

Location:



PRODUCT DESCRIPTION



SPECIFICATIONS

Brightness: 170 lm Beam Angle: 25°

85

Landscape 2" recessed inground luminaire for up, down, side light applications.

FEATURES

- Integrated honeycomb louver for reduced glare
- 30° visual cutoff IP68 rated, Suitable for continuous immersion under water
- Factory sealed water tight fixtures
- Solid stainless steel construction
- Stainless steel spring clip allows wall or downlight applications
- Available Concrete Pour Adapter
- Spring clip, 6' lead wire and direct burial gel filled wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1838 Listed

ORDERING NUMBER

	Color	Temp	Finish	
2052 Square Honeycomb louver	30	3000K	BS SS	Bronzed Stainless Steel Stainless Steel

IEC safety Standard	Walk over	Drive over	
Resistance to static load test	Yes (1125lbs)	Yes (4496lbs)	
Resistance to torque and shear loads test	N/A	Yes	

2052-30____

Example: 2052-30SS

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 **Central Distribution Center** 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. MAR 2017

0° 15°

4.1W / 6.6VA

70,000 hours

9 - 15VAC (Transformer is required)

Input:

Power:

CRI:

Rated Life:


31/8'

2" INGROUND - SQUARE

2052 Honeycomb Louver

LANDSCAPE LIGHTING

/AC

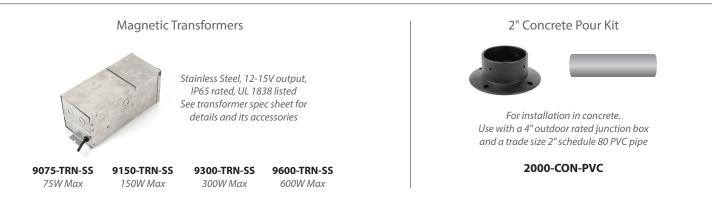

TESTED MAGNETIC LOW VOLTAGE(MLV) DIMMERS

Luminaire	Dimmer						
	Manufacturer	Family	Model	Power Rating	Range*	Note	
	Lutron	Diva	DVLV-600	600W	20% - 100%		
2052		Skylark	SLV-600P	600W	15% - 100%	Best performance	
		Skylark	S-10P	1000W		Not recommended	

*Low end of this range is determined by output current which may not directly translate to the perceived light output

WAC Lighting fixtures are compatible with a variety of dimmers. For your convenience we have included a compatibility chart showing dimmers which have been tested with our products. The recommended list below is based upon testing conducted in a lab, and the results can vary in certain field applications due to a number of factors. Exclusion from the list does not imply incompatibility, just that it has not been tested by WAC Lighting. Please reference the dimmer manufacturer's instructions for installation, or contact a WAC lighting professional at 800-526-2588.

Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760