
ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0188

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

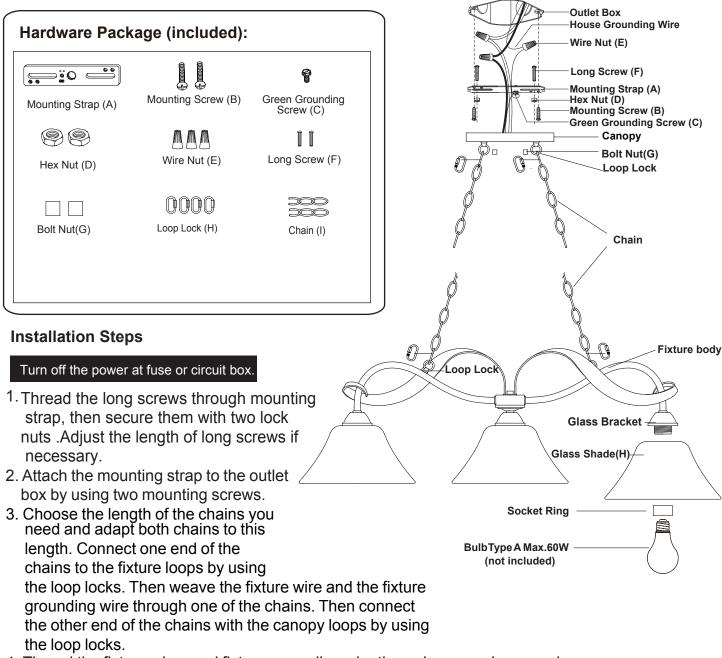

- 4. Thread the fixture wires and fixture grounding wire through canopy loops and canopy.
- 5. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - ---The smooth wires (marked) from the fixture to the black wire from the power source.
 - ---The ridged wires (unmarked) from the fixture to the white wire from the power source.
 - ---Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 - Carefully put the wires back into the outlet box.
- 6. Attach the fixture to the mounting strap, and secure it with two ball nuts.



- 7. Attach the glass shades to the glass brackets, then secure them with the socket rings.
- 8. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
- 9. Turn on the power at the main fuse or circuit breaker box.

Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

