


DIAGRAM OF INSTALLATION STRUCTURE

SKU No. :CE1008611

Product Size: Ø15.7"*H7.9"

Light Source: 3*E26

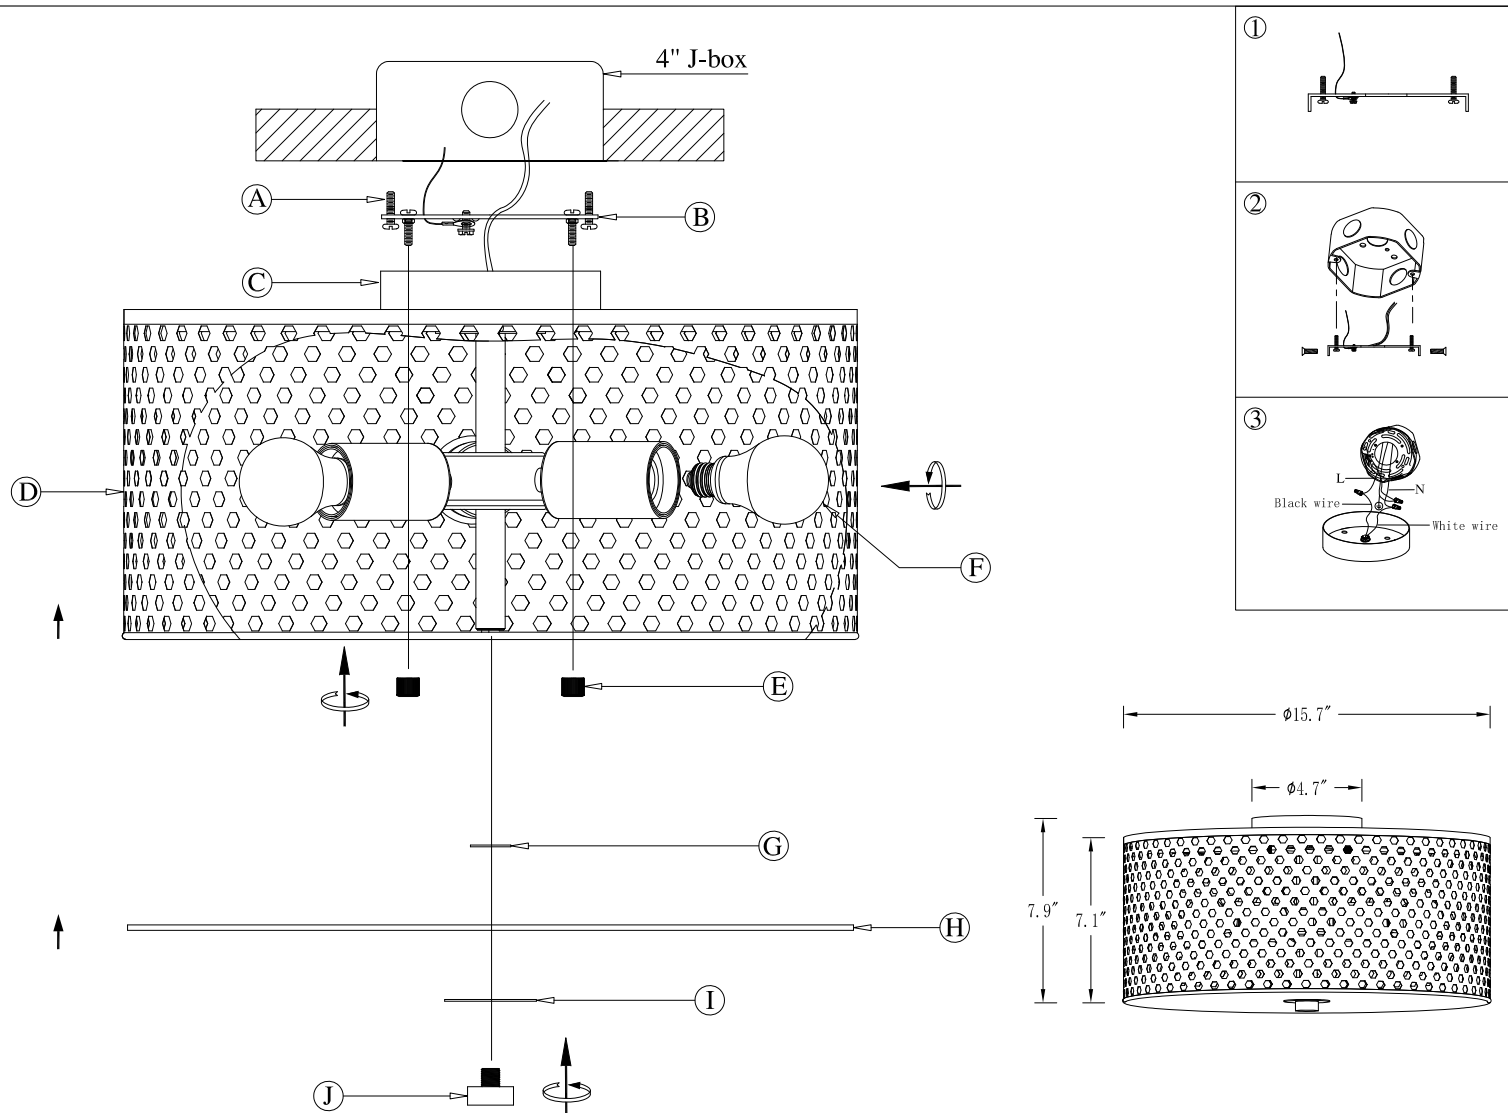

- | | | | | |
|--------------------|----------------------|--------------------------|---------------------------|--------------------|
| (A) Mounting Screw | (B) Mounting Bracket | (C) Canopy | (D) Lampshade Subassembly | (E) Mounting Nut |
| (F) E26 Bulb | (G) Inner Washer | (H) PMMA Diffusion Plate | (I) Outer Washer | (J) Decorative Nut |

Installation instruction

1. Turn off the power
2. Dismantle mounting bracket subassembly as picture 1, install mounting bracket (B) to J-Box with mounting screws (A).
3. Connect the fixture to a suitable ground in accordance with local electrical codes.
4. Connect the White wire to the neutral power line wire with a wire nut.
5. Connect the Black wire to the hot power line wire with a wire nut.
6. Neatly place all wires and wire nut connections inside the canopy (C).
7. Make connecting screws of bracket subassembly insert into mounting holes of lampshade subassembly (D), then secure lampshade subassembly (D) with mounting nuts (E).
8. Screw E26 bulbs (F) into the fixture.
9. Place inner washer (G), PMMA diffusion plate (H) and outer washer (I) on their respective positions under lampshade subassembly (D) in turn, then lock them together with decorative nut (J).
10. Turn on the power.