

ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product.

47151 47153 47154 47155

- WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
- ♦ ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.


ASSEMBLING THE FIXTURE (Fig.1)

- 1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
- 2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
- **3.** Attach the mounting plate to the Junction Box with the two Junction Box Screws as shown. The side of the mounting plate marked "GND" must face out. **The junction box is not included.**
- Attach the tube(B) to the top center pipe nipple of the shade(C), turn it until tighten. Attach the canopy(A) to the tube(B), by turning it clockwise until tight.

NOTE: THE SHADE(C) OF THE PRODUCT MAY VARY.

- 5. While holding the lamp body towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Mounting strap with the green screw provided. After wires are connected, tuck them carefully inside the Junction Box.
- 6. Attach the lamp body onto the ceiling, aligning the mounting holes with the mounting plate's thread holes, lock it securely with the mounting screws.
- 7. Install the light bulbs(Not included) in accordance with the fixture specifications. NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!
- 8. Place the diffuser(D) on to the bottom big round frame of shade(C).

Your installation is now complete. Return power to the junction box and test the fixture.

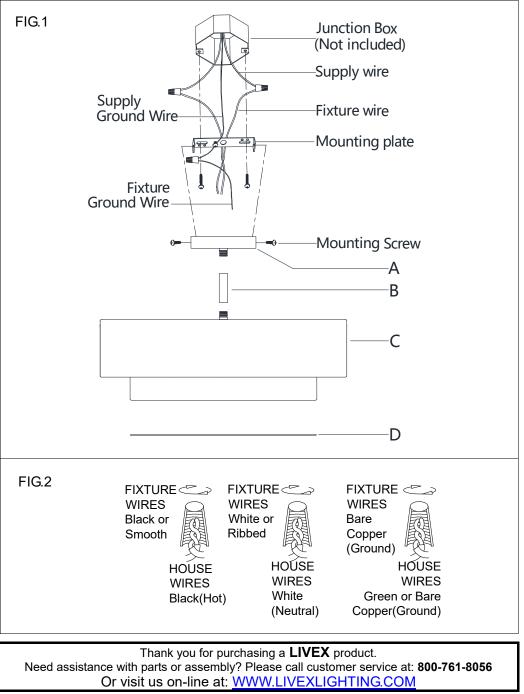

©COPYRIGHT ALL RIGHTS RESERVED. LIVEX LIGHTING, INC.