

## Napa™ Hand Held Shower

### MODELS:

- VS-2007: 2.5 GPM (9.5 L/min) flow rate
- VS-2007-E2: 2.0 GPM (7.6 L/min) flow rate
- VS-2007-E175: 1.75 GPM (6.6 L/min) flow rate

### FEATURES:

- 5 plungers with 45 sprays, 12 massage jets, 3 spray patterns
- Patented Anystream® plungers resist scale build-up
- Spray adjusting faceplate
- No-Slip rubber handle insert
- Plastic body construction
- Hand held shower has 1/2" -14 NSPM male inlet
- Includes coordinating shower bracket with 1/2" -14 NPTF female inlet, 1/2" - 14 NPSM male outlet with check valve
- Includes 5' metal hose with (1) 1/2" -14 NPSM female inlet and (1) 1/2"-14 NPSM female outlet with check valve
- Corrosion resistant finishes

### STOCK FINISHES:



PC BN PB



### STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- CEC (CA Energy Commission) certified, 1.75 GPM only
- WaterSense certified, 2.0 & 1.75 GPM only

### WARRANTY:

Visit [www.speakman.com](http://www.speakman.com) for full product warranty information

- Limited Lifetime Warranty (consumer)
- 1 Year Limited Warranty (commercial)

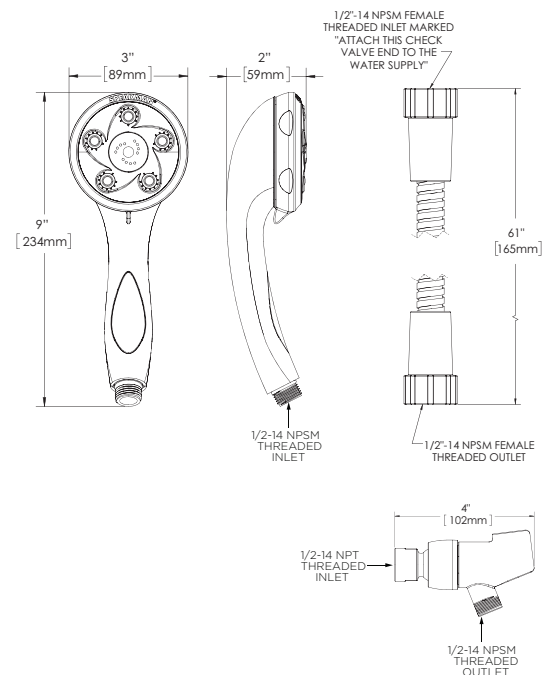

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

SPEAKMAN  
400 ANCHOR MILL ROAD  
NEW CASTLE, DE 19720

**P:** 800-537-2107  
**F:** 800-977-2747  
**W:** WWW.SPEAKMAN.COM  
**R:** 01-APRIL 2018