# **KOHLER**<sub>®</sub>

# Features

- Single-speed whirlpool offers performance and value, with 8 fully adjustable jets.
- Hydromassage flow and direction can be controlled at each jet.
- Built-in heater.
- Comfort Depth<sup>®</sup> design offers a convenient 19-inch step-over height while retaining the same depth as a standard 21-inch bath.
- Generous 6-foot length provides an incredibly spacious bathing area.
- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.
- Integral apron.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Textured bottom surface
- Left-hand drain.

## Material

Acrylic

#### **Hydrotherapy**

• Whirlpool

## Installation

• Three-wall alcove.

# **Additional Hydrotherapy Options**

- Soaking Bath K-1125-LA
- Soaking Bath + Bask heated surface K-1125-LAW
- BubbleMassage air bath K-1124-GLA
- BubbleMassage air bath + Bask heated surface K-1124-GLAW
- VibrAcoustic K-1124-VBLA
- VibrAcoustic + Bask heated surface K-1124-VBLAW
- Whirlpool K-1124-LA
- Whirlpool + heater K-1124-HL
- Whirlpool + Bask heated surface K-1124-LAW
- Whirlpool + BubbleMassage air bath K-1124-XHGLA

## **Required Products/Accessories**

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

#### **Recommended Products/Accessories**

K-9529 Removable Bath Seat K-24916 Wireless Music Kit







## Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 UL 1795 Greenguard UL 2818 - Gold ADA ICC/ANSI A117.1

# KOHLER<sup>®</sup> Plastic Baths and Receptors Lifetime Limited Warranty KOHLER<sup>®</sup> Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**


Color tiles intended for reference only.

#### **Color Code Description**

- 0 White 96 Biscuit
- 47 Almond
- NY Dune
- 95 Ice™ Grey
- G9 Sandbar





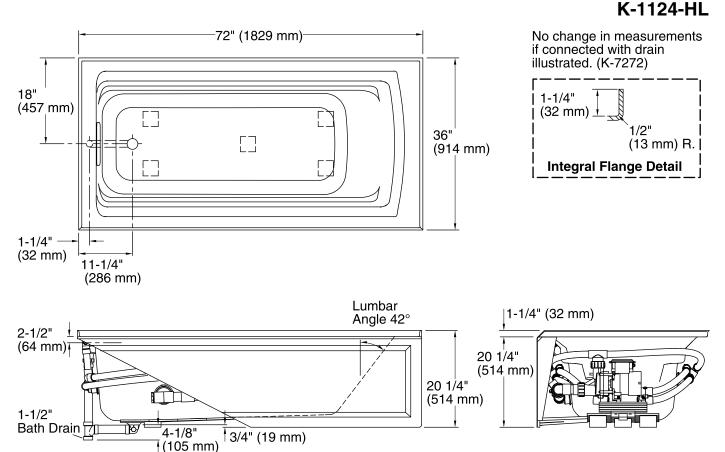

## **Required Electrical Service**

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

 Pump:
 120 V, 15 A, 60 Hz

 Heater:
 120 V, 15 A, 60 Hz

#### **Technical Information**

All product dimensions are nominal.

Installation:	Three-wall alcove
Drain location:	Left
Basin area, bottom:	51-3/8" x 21" (1305 mm x 533 mm)
Basin area, top:	64-1/2" x 30-1/2" (1638 mm x 775 mm)
Weight:	140 lbs (63.5 kg)
Minimum floor load:	43 lbs/ft² (209.9 kg/m²)
Water depth:	15" (381 mm)
Water capacity:	72 gal (272.5 L)
Electrical component	Pump: 120 V, 7 A, 60 Hz
rating:	Heater: 120 V, 12.5 A, 60 Hz, 1500 W
Pump speed:	Single
Minimum flat for door:	1-7/16" (36 mm)

## Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

**Archer**®

6' Whirlpool Bath

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.