


RUBIK SERIES

VMCL000605D012WH



PROJECT:	TYPE:	CATALOG #:	DATE:
----------	-------	------------	-------

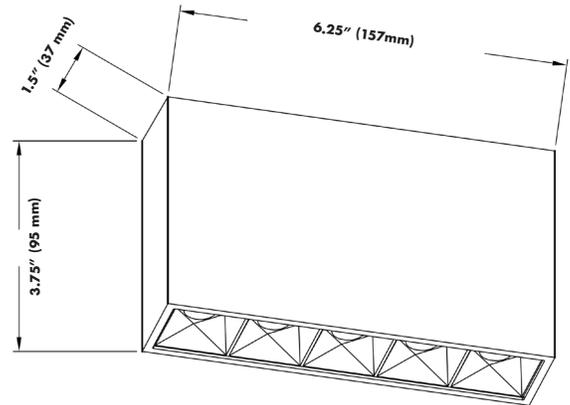

NOMINAL STANDARD SPECIFICATIONS

SKU:	VMCL000605D012WH
FINISH:	WHITE
LUMEN OUTPUT:	755.52
INPUT VOLTAGE:	100 - 277V
COLOR TEMPERATURE:	3000K
CRI: 90	90
DIMMING:	0-10V
POSITIONING:	FIXED
BEAM ANGLE:	31.8°
WATTAGE:	12 W
CUT OUT:	0.59"
ENVIRONMENT:	DRY / IP20
MOUNTING:	SURFACE

FEATURES

- LED Fixed surface mounted downlight, RUBIK Series
- Aluminum body structure available in White finish
- Integrated LED 5-spot fixture, surface mounted
- ETL, cETL, Title 20 Compliant, Title 24 Compliant, Prop 65 Compliant, Energy Star Compliant
- 3 Year Limited Warranty

THE MEASUREMENTS ARE ROUNDED TO THE NEAREST 1/4"

SAMPLE ORDERING SKU

1	2	3	4	5	6
VMCL000605D012WH	012	WH	30K	B31	
1 - SKU	2 - WATTAGE	3 - FINISH	4 - COLOR TEMP.	5 - BEAM ANGLE	6 - OTHER OPTIONS
VMCL000605D	012 - 12 W	WH - White BL - Black*	27K - 2700* 30K - 3000 35K - 3500* 40K - 4000*	B12 - 12°* B20 - 20°* B31 - 31.8° B48 - 48°*	EMD - EMERGENCY DRIVER EMC - EMERGENCY CIRCUIT

NOTES

*ANY CUSTOM MODIFICATION WILL SUBJECT TO MINIMUM ORDER QUANTITY. (M.O.Q.)

RELATED PRODUCTS AVAILABLE:

VMDL000605C012WH
VMDL000605A012WH



PROJECT:


TYPE:

CATALOG #:

DATE:

PHOTOMETRICS


30K - 3000 - STANDARD

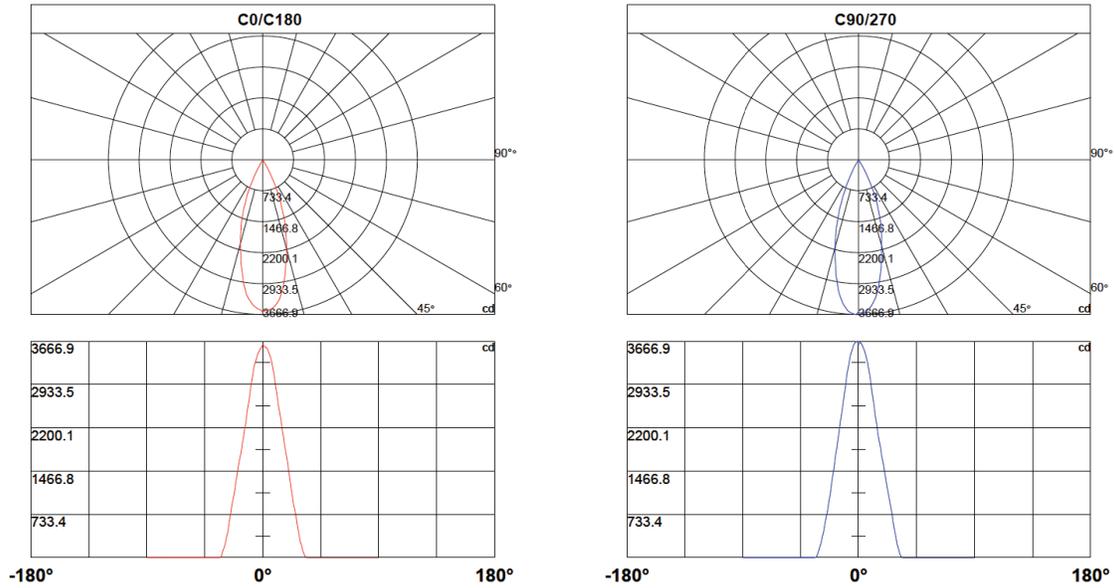

BEAM ANGLE

30K - 3000 - STANDARD

Lux-Distance Curve

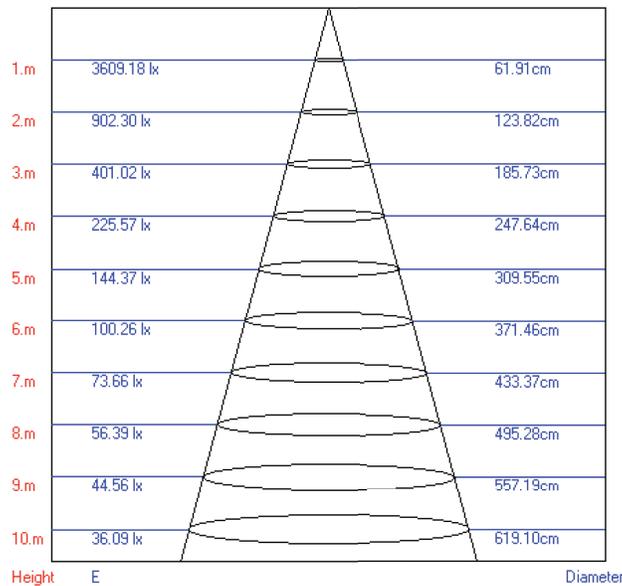

Beam Angle: 34.40°