

- Brass construction
- For single-hole installation
- One-piece, self-contained ceramic disc valve which allows both volume and temperature setting
- Temperature memory allows the faucet to be turned on and off at any temperature setting
- 4-3/8" (111 mm) spout reach
- Stationary spout
- Metal grid drain with metal tailpiece
- Flexible connections
- 0.5 gal/min (1.9 l/min) maximum flow rate [max at 80 psi (5.5bar)]



ADA

CSA B651

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------



CP	Polished Chrome
----	-----------------

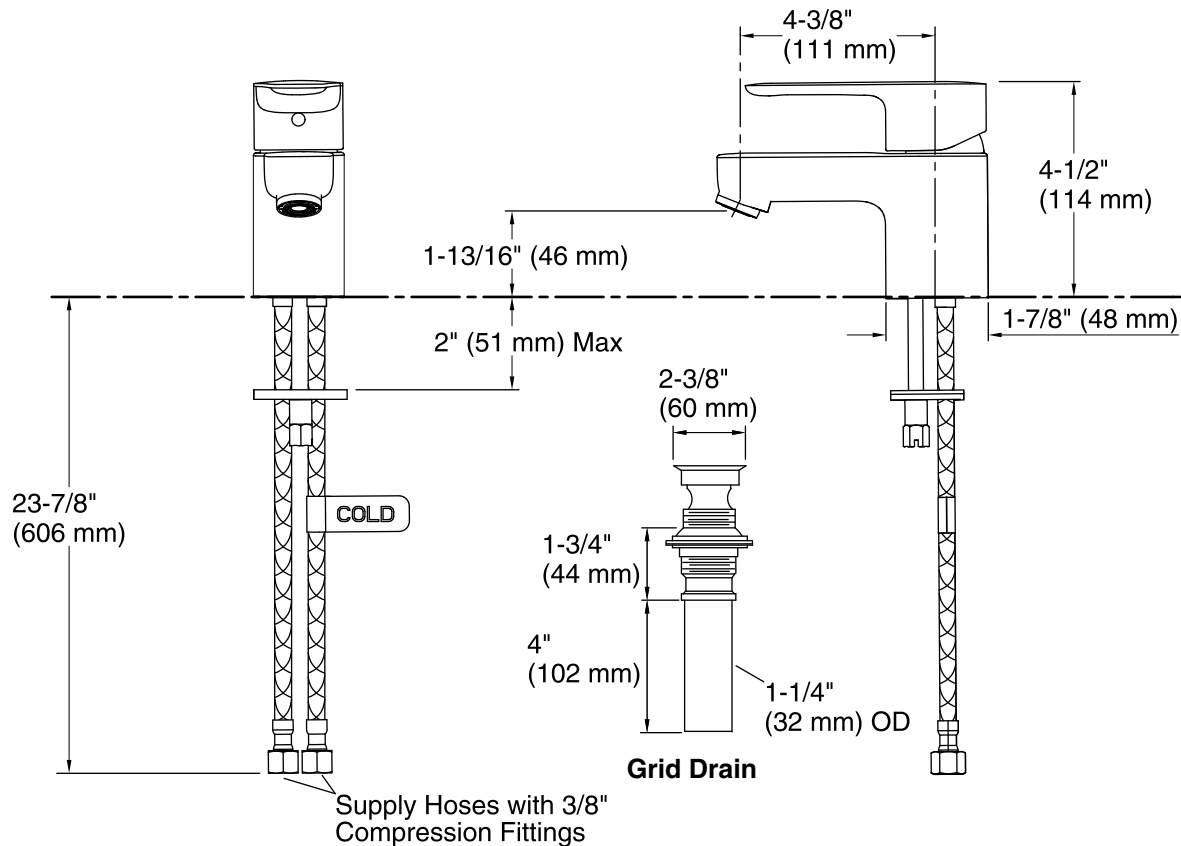

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate:	0.5 gal/min (1.9 l/min)
Pressure:	80 psi (5.5 bar)
Drain included:	Yes
Drain with overflow:	Yes
Drain tailpiece included:	Yes

Spout:

Spout reach:	4-3/8" (112 mm)
Handle clearance:	4-1/8" (105 mm)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.