

# ASSEMBLY INSTRUCTIONS

(For LD18731-1)

## WARNING!

● If cushion gets wet, hang over chair to dry to prevent mold/mildew.


## ATTENTION:

1. Please read these instructions carefully before assembly.
2. Since aluminum is soft metal, over tightening may strap thread or break the parts.
3. DO NOT use power tools.

## Assembly steps:

1. Loosely attach the seat and back frame(A&B) to the arms(C&D) with bolt(H&G), flat washers(I) lock washer(J), and PVC cover(L).  
DO NOT tighten the nuts.
2. Turn the chair onto its legs and put the cushion on (F&F1) then it is ready to use.

Warning : Do not use acid or alkaline washing liquid to clean the product.

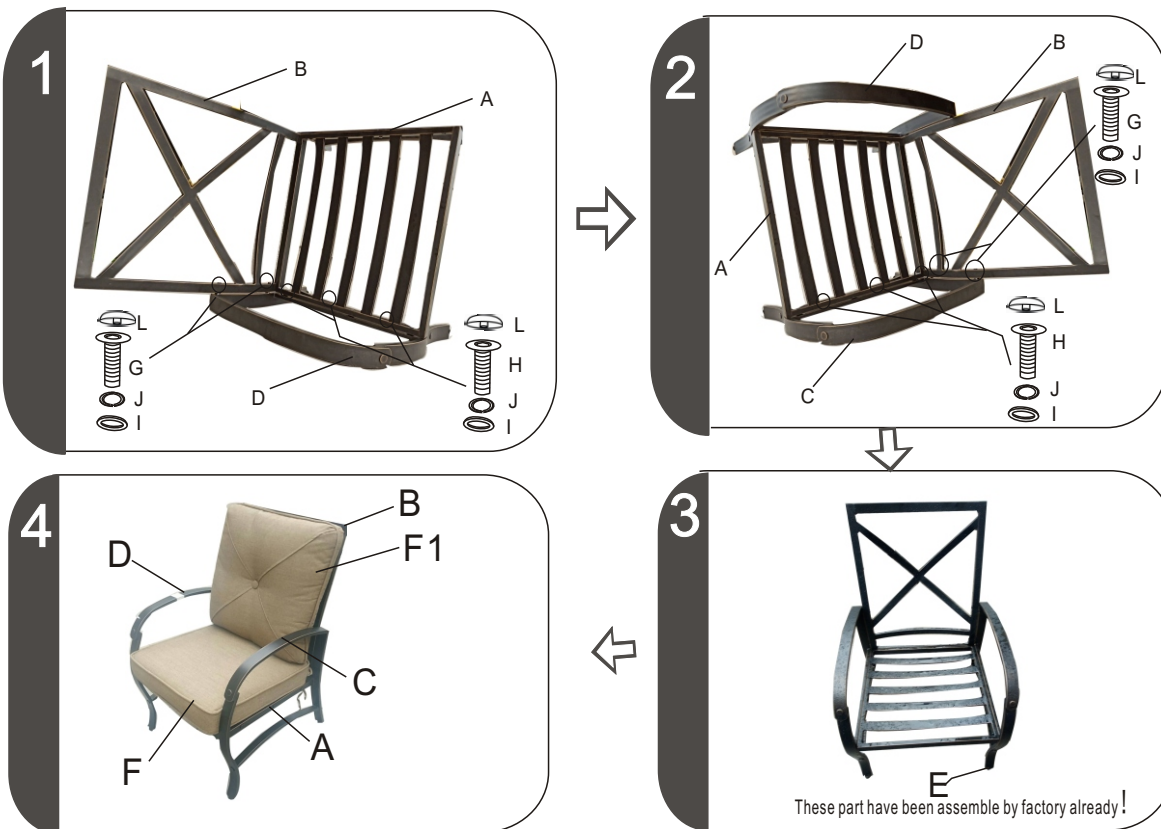

Parts list	Parts picture	Description	Q'ty	Parts list	Parts picture	Description	Q'ty
A		Seat frame	1	G		Screw (M6*45)	4
B		Back frame	1	H		Screw (M6*30)	6
C		Arm right	1	I		Flat washer (M6)	10
D		Arm left	1	J		Lock washer (M6)	10
E		Foot leveler	4	L		PVC cover	10
F		Seat cushion	1	M		Wrench	1
F1		Back cushion	1				

\* DO NOT OVER TIGHTEN

Made in China

\* NO POWER TOOLS

\* NO SOCKET DRIVERS

