

## Two-Light Close-To-Ceiling

Wall or ceiling mounted • Damp location listed



### Description:

Transit is a uniquely styled series with clean design flexibility. This two-light LED close to ceiling featuring a white acrylic diffuser and Brushed Nickel finish can mount to either ceiling or wall.

### Specifications:

- Brushed Nickel (-09) (plated)
- Steel Construction
- White acrylic diffuser
- LED Module is replaceable (part # 93053641)
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- ENERGY STAR® qualified

### Performance:

Number of Modules	2
Input Power	17w per module
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82) per module
Lumens/LPW (Delivered)	1326/40.1 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified

**P3417-0930K9**

### Images:



### Dimensions:

Square: 14"  
Depth: 3-3/4"  
Height: 3-3/4"  
H/CTR: 7"

## Photometrics:

## P3417-0930K9

ELECTRICAL DATA		P3417-0930K9
Input Voltage		120 V
Input Frequency		60 Hz
Input Current		0.283 A
Input Power		17
Power Factor		Greater than 0.90
THD		<20%
FCC		Meets FCC Title 47, Part 15 Class B
Operating Temperature		-30 °C to 30 °C
Dimming		Yes*

\*See Dimming Notes for more information

### P3417-0930K9


LED Light Engine: 3000 K 90 CRI

System Wattage: 17

Fixture delivered lumens: 1326

Fixture Efficacy: 40.1

Spacing Criteria: 1.4

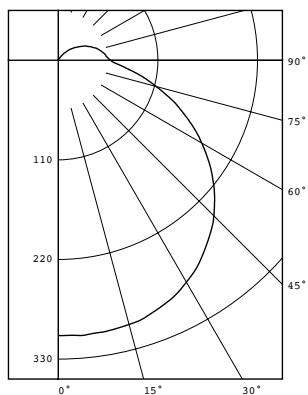

Test 15.00852 Test Date 05/22/15

### CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	304	
5	305	29
15	302	85
25	292	135
35	272	170
45	243	187
55	205	183
65	160	159
75	112	119
85	70	78
90	57	
95	53	58
105	46	49
115	36	36
125	25	23
135	15	12
145	5	3
155	0	0
165	0	0
175	0	0
180	0	

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	249	18.8
0-40	419	31.6
0-60	790	59.6
0-90	1145	86.4
90-120	143	10.8
90-130	166	12.5
90-150	181	13.6
90-180	181	13.6
0-180	1326	100.0

### P3417-0930K9

#### Dimming Notes:

---

P3417 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

#### Dimming Controls

---

Lutron Nova T NTELV-300

Lutron Verti VTELV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.