

D304022



D304022

SPECIFICATIONS

ANTIOCH™ TWO HANDLE MINI-WIDESPREAD LAVATORY FAUCET

Model

D304022

Flow Rate

Description

- Ceramic disc valves
- 5" high spout, 4 1/2" spout length, laminar flow
- With 50/50 touch down drain assembly
- 3 hole mount, 4" - 12" installation
- 1.5gpm (5.7L/min) maximum flow rate @60psi

Standards



NSF/ANSI 372

• NSF/ANSI 372

MEETS ASME
A112.18.1M/A112.18.1

• ASME A112.18.1M/A112.18.1



- ADA Accessibility Guidelines for Buildings and Facilities - 309.4 Operation and Operable Parts


Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.



Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

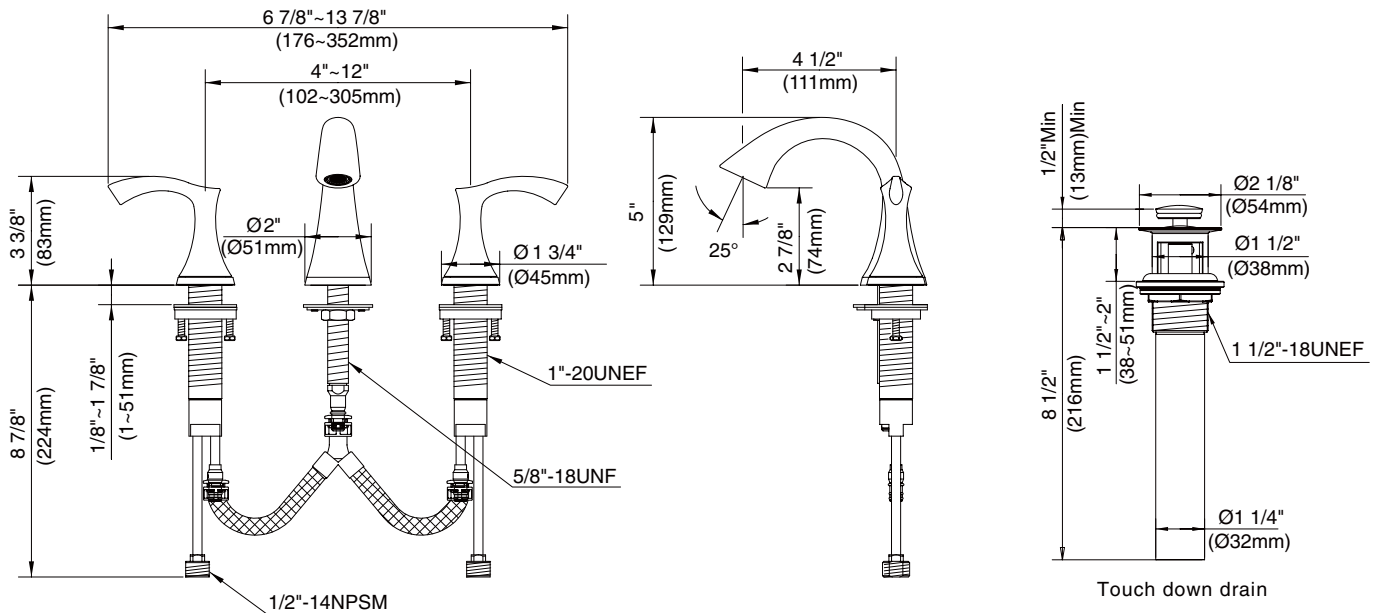

Submittal Information:

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____