




Ignis 24, brass, walnut, rigid stem

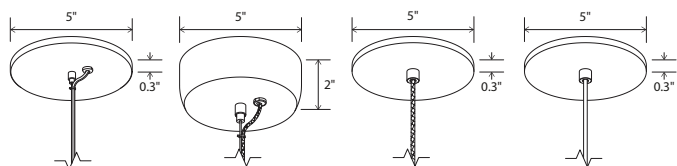


Ignis 24 with Medium base socket
Low-profile round canopy, SPT with steel cable included
Canopy dimensions: 5"Ø, 0.3" deep

Ignis 24 with LED lamping
Extended-profile round canopy, braided cord with steel cable included, required to house the LED driver (3.25" x 2.25" x 1.25")
Canopy dimensions: 5.5"Ø, 2" deep

Ignis 17 with LED lamping
Low-profile round canopy, braided cord included
Canopy dimensions: 5"Ø, 0.3" deep

Ignis 17 with Medium base socket
Low-profile round canopy, SVT included
Canopy dimensions: 5"Ø, 0.3" deep

Ignis 17 / Ignis 24 pendant

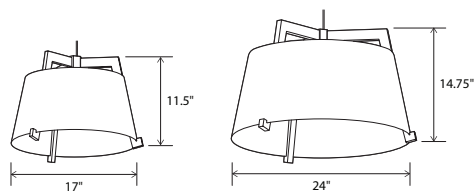

Ignis 17 dimensions: 17" Ø, 11.5"
Ignis 24 dimensions: 24" Ø, 14.75"
Materials: solid wood, metal
Ignis 17 weight: 7 lb
Ignis 24 weight: 11 lb
Wood grain will vary
Specifications subject to change



MATERIAL & FINISH OPTIONS

Ignis part # 06-220-	
Fixture Size	
17" Ø	17
24" Ø	24

Standard Combinations (Shade, Frame)

distressed brass, walnut	DW
distressed brass, dark stained walnut	DD
brushed brass, walnut	RW
brushed aluminum, walnut	AW
brushed aluminum, maple	AM
brushed rose gold, dark stained walnut	GD
gloss white, maple	WM

Suspension Type

corded	C
rigid	R

Lamping

integrated LED with diffuser	L
medium base socket without diffuser	S
medium base socket with diffuser	D

Lamping

Integrated LED Specifications

Light output: 1250 Lumens (source)
Light color: 2700 K
Additional color temperatures as well as sunset dimming are available upon request.
Color accuracy: 90+ CRI
Power usage: 13 W
Input voltage: 120-277 V AC
Dimmable: 0-10 V dimming at 120-277 V AC
TRIAC and ELV dimming at 120 V AC only

Medium Base E26 Specifications

Ignis 17 lamping:
1x E26 base, type A lamp, 75 W max
Ignis 24 lamping:
3x E26 base, type A lamp, 75 W max each
Bulbs not included
Input voltage: 250 V AC max

Suspension Type

Corded

8'-0" length of SVT wire is used. Wire is field adjustable and suitable for a sloped ceiling.

Rigid

Stem comes 6' long and is field cuttable to length (.038" Ø)

Suspension and Hardware Finish

Standard Combinations

Come with either black or satin nickel suspension, canopy, and sockets:

Black: DW, DD, RW, GD

Satin Nickel: AW, AM, WM

Corded Versions

White cord: satin nickel hardware

Black cord: black hardware

24" Ignis corded uses a 1/16" Ø steel cable for suspension



Diffuser

Frosted white diffuser (CM-024)

Diffuser is recommended when fixture location may allow for direct glare. Integrated LED option always comes with a diffuser

The Ignis and Imber were inspired by the same design principles that make Cerno and ICRAVE well suited to collaborate. Honesty, simplicity, elemental, timeless and quality are words that sit at the core of both companies' design ethos and we believe these light fixtures embrace these qualities well. Each fixture was reduced to its essential parts – frame and shade – highlighting the interplay of the components, and accentuating the clean lines of the form.

ICRAVE / Cerno

