




No.	Description	Part No.
1	Handle	5C0075400CP/AP/HA0
2	Trim Cap	5L0P0277CP/AP/HA
3	Retainer Nut	5T0C0171NT
4	Ceramic Disc Cartridge	5D8005400PL0
5	Cartridge Base	5Y0197900NT0
6	Aerator Assembly	5Y0198000PL0
7	Spout Ring	5Y0198100CP/AP/HA0
8	Deck Plate Assembly	5Y0198200CP/AP/HA0
9	Mounting Hardware	5Y0198300ZZ0
10	Pop-Up Assembly	5Y0M0089CP/AP/HA
11	Inlet Hose(Hot)	5G0003200CC0
12	Inlet Hose(Cold)	5G0003300CC0
13	Lift Rod	5Y0198400CP/AP/HA0
14	Allen Key 2.5mm	51002812NT
15	Screw & Button	5Q0M0143PL

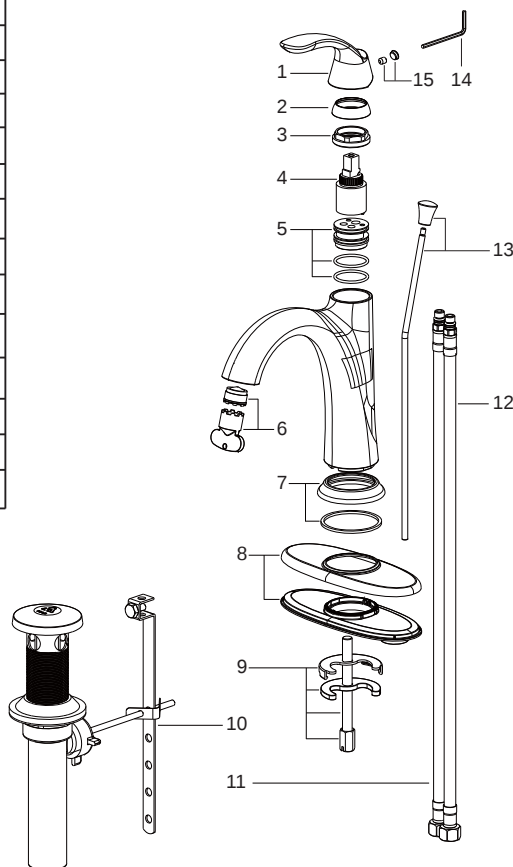

Installation/Installation/Instalación


CUSTOMER SERVICE

TOLL-FREE 1-877-482-5422


MFF-AMC1-CP - Polished Chrome
MFF-AMC1-BN - PVD Brushed Nickel
MFF-AMC1-ORB - Oil Rubbed Bronze



Tools You Will Need / Outils dont vous aurez besoin / Herramientas necesarias



Adjustable Wrench
 Clé à molette
 Llave ajustable



Phillips Screwdriver
 Tournevis Phillips
 Destornillador cruciforme



Pipe Tape
 Ruban pour tuyau
 Cinta selladora para rosca

SAFETY TIPS


- If you use soldering for the installation of the faucet, the seats, cartridges and washers will have to be removed before using flame. Otherwise, warranty will be void on those parts.
- Cover your drain to avoid losing parts.
- 0°C~55°C.

CONSIGNES DE SÉCURITÉ


- Si vous posez le robinet par brasage, il est essentiel de retirer les sièges, les cartouches et les rondelles avant d'appliquer la flamme, faute de quoi la garantie sur ces pièces sera annulée.
- Couvrez le drain pour ne pas perdre des pièces.
- 0°C~55°C.

CONSEJOS DE SEGURIDAD


- En el caso de utilizar soldadura para instalar el grifo, remueva los asientos, cartuchos y arandelas antes de usar la llama. De lo contrario, se anulará la garantía para esos componentes.
- Tape la boca del desagüe para prevenir la pérdida de piezas pequeñas.
- 0°C~55°C.

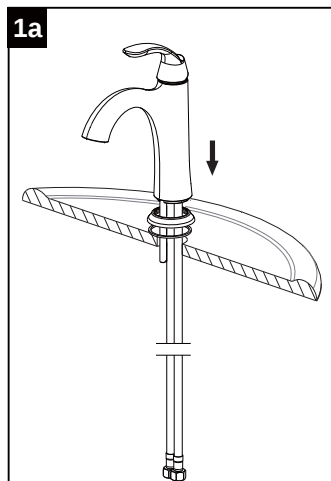


Lower the faucet with base ring into the mounting hole.

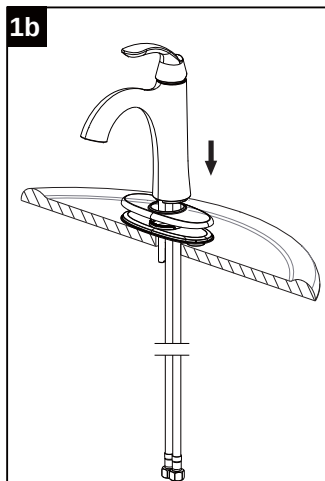


Lower the faucet with deck plate into the mounting hole.

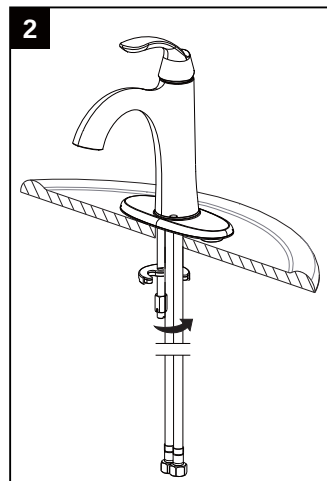


Insert the rubber washer, metal washer and secure the faucet with mounting nut.

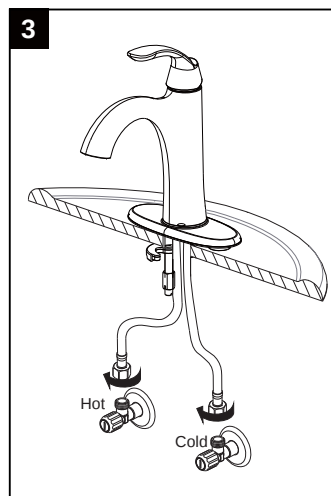


Connect the water supply lines to the hot and cold angle stops.

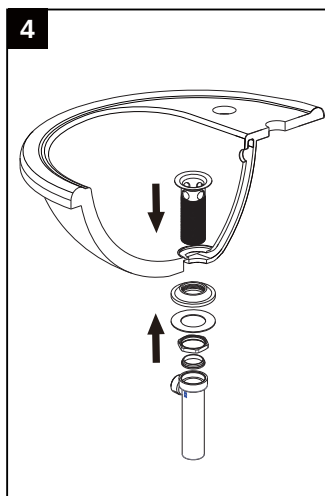


Slide drain trim and plug into drain hole and secure from below with washer and nut.
Attach the drain tail piece to drain body.

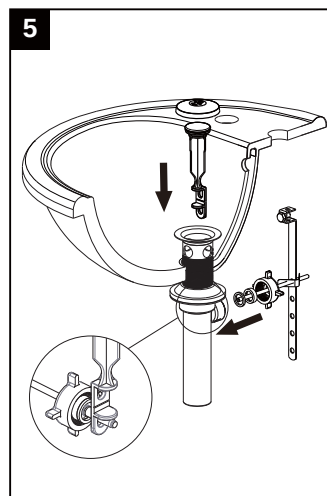


Install the drain stopper assembly and attach the movable rod assembly into the drain body.

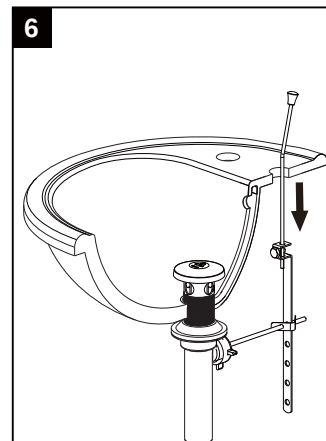

Attach the lift rod to the strap.

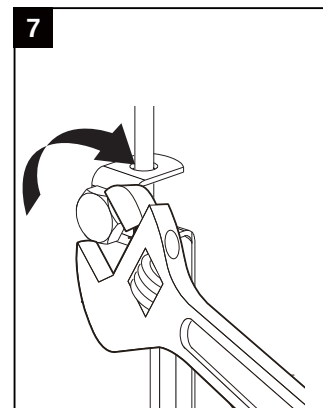

Tighten the screw in the strap onto the lift rod.

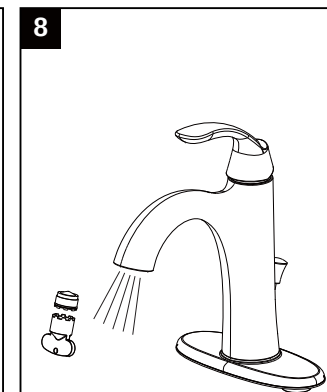

Remove aerator assembly and flush out debris. Reinstall aerator assembly.