


CHC3413

ASSEMBLY & INSTALLATION GUIDE

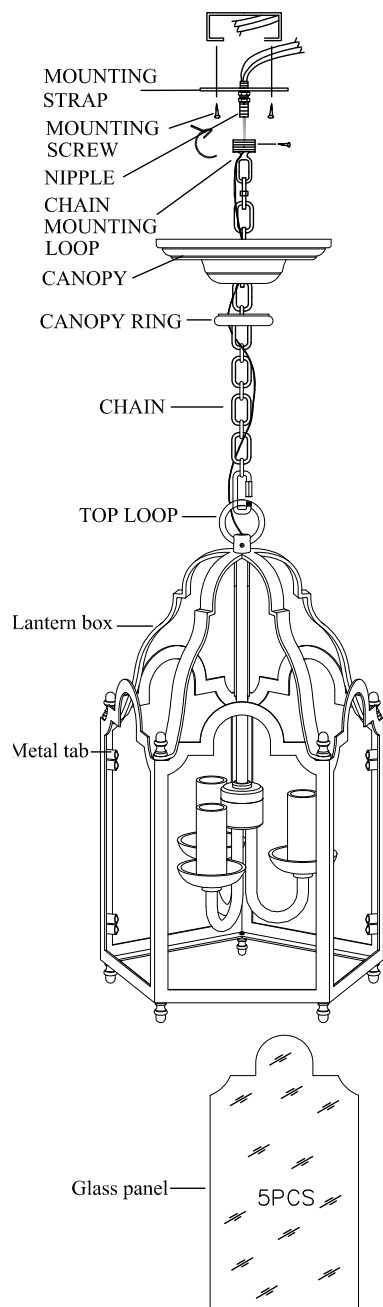

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. To insert glass panels provided to each frame of lantern box, make sure metal tabs are flipped against the opening of the frame. Place glass panels to each frame, secure glass panels by bending back metal tabs towards the glass panels.
2. Attach mounting strap to ceiling outlet box and secure with mounting screws.
3. Insert top thread nipple in mounting strap and thread one of hex nut to the top of nipple until tight.
4. Adjust the fixture chain to your desired length by removing the links if needed. Attach one end link of chain onto the top loop and attach the other end of chain onto the chain mounting loop.
5. Unscrewing the canopy ring and slide canopy ring and canopy on the chain.
6. Attach chain mounting loop to nipple using the ceiling loop screw. Thread another hex nut to the end of nipple until tight. Feed wires through the chain, mounting loop and nipple.
7. Attach the ground wire (silver or brass in color) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed. It is imperative that the outlet box in your home be properly grounded. Be sure no wire strands are exposed.
8. Connect the neutral wire from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
9. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
10. Tuck wire connection neatly into ceiling outlet box.
11. Slip canopy to ceiling and secure with threaded canopy ring.
12. Insert light bulbs into the sockets.