

## Medium Hanging Lantern

 Ceiling cord mounted • Damp location listed **PROGRESS LED**


### Description:

The one-light medium size LED cord hung pendant/outdoor hanging lantern from the District Collection features metal shade that offers an industrial-inspired design. The versatile vintage form can be used in indoor and outdoor applications. Antique Bronze finish.

### Specifications:

- Antique Bronze (-20) (painted)
- Aluminum Construction
- Antique Bronze, painted white inside aluminum shade, White acrylic Diffuser
- LED Module is replaceable (part # 93054049)
- Versatile vintage form.
- Metal shade that offers an industrial-inspired design.
- Can be used in both indoor and outdoor applications.
- 623 lumens 69.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 10 feet of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 high efficacy requirements for outdoor use only

### Performance:

Number of Modules	1
Input Power	9w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	623/69.2 (LM-82)
Lumens/LPW (Delivered)	426/57.6 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified Meets California Title 24 high efficacy requirements for outdoor use only

## P5535-2030K9

### Images:



### Dimensions:

Diameter: 8"  
Height: 6-1/4"  
Overall Ht. W/Cord: 130"

Glass  
Width: 8-1/16"  
Length: 8-1/16"  
Height: 5-7/8"  
Glass 2  
Width: 2-7/8"  
Length: 2-7/8"  
Height: 0-13/16"

**Photometrics:**

**P5535-2030K9**

<b>ELECTRICAL DATA</b>	<b>P5535-2030K9</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.075 A
Input Power	9
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

\*See Dimming Notes for more information

**P5535-2030K9**


LED Light Engine: 3000 K 90 CRI  
 System Wattage: 9  
 Fixture delivered lumens: 426  
 Fixture Efficacy: 57.6  
 Spacing Criteria: 1.3

**CANDELA DISTRIBUTION**

DEG	CANDELA	LUMENS
0	187	
5	187	18
15	180	51
25	168	78
35	153	96
45	125	94
55	62	55
65	19	20
75	10	11
85	5	5
90	0	

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%FIXT
0-30	146	34.3
0-40	242	56.7
0-60	391	91.7
0-90	426	100.0
90-180	0	0.0
0-180	426	100.0

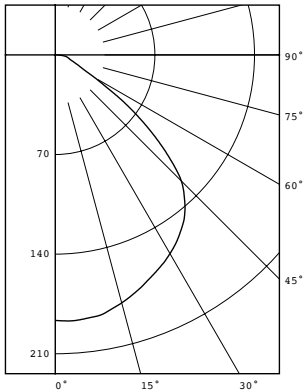

## P5535-2030K9

### Dimming Notes:

---

P5535 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

### Dimming Controls

---

Lutron Nova T NTELV-300

Lutron Vierti VTELV-600

Lutron Ariadni AYCL-153P

Lutron Diva DVCL-153P

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.