

WOODEN BUNK BED

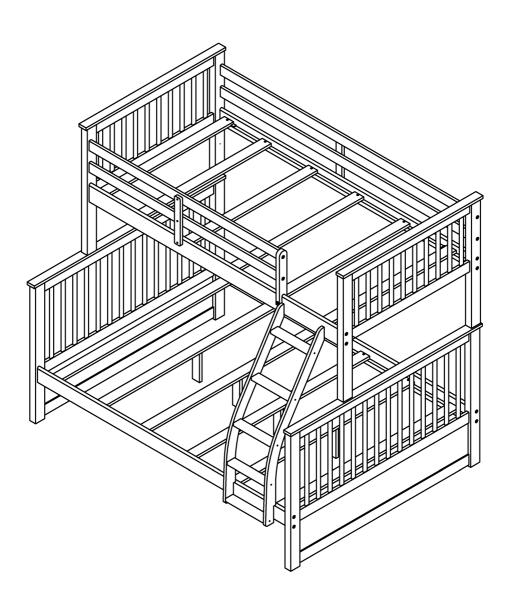


Assemply Instructions

Thank you for purchsing this product. Be sure to check all packing material carefully for small parts which may have come loose inside the carton during shipment. Separate, identify, and count all parts and metal hardware. Comepare with parts list to be sure all parts are present. If any part(s) are missing or damaged, please contact your local furniture dealer. For efficient and speedy service, please indicate the model munber and code letter of pars(s) needed.

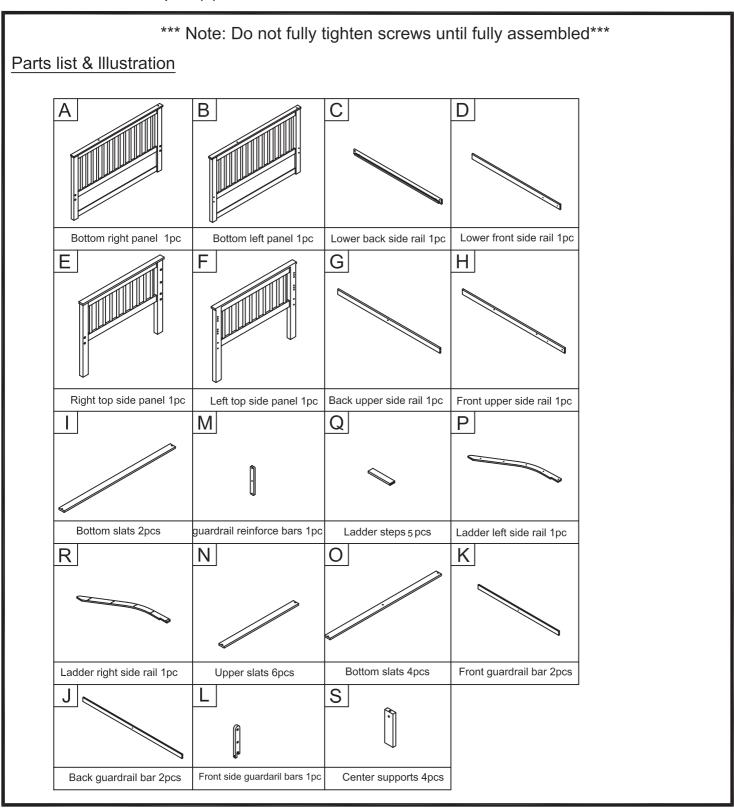


Hardware & Illustration

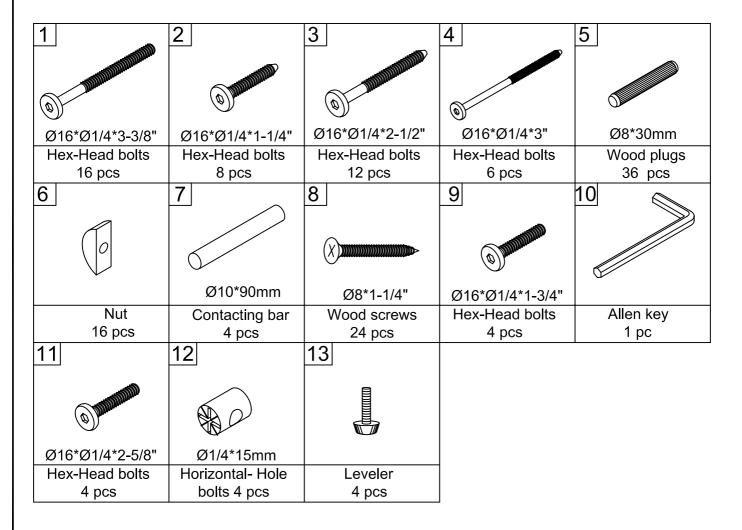

*** Matress (not included)

Recommended size: 37.5" wide x 74" long x 6" maximum thickness.

Attention: Some numbered parts listed on the instruction sheet may not be in parts bag as thay may already be assemble. Carefully check parts and packing material prior to ordering replacements.

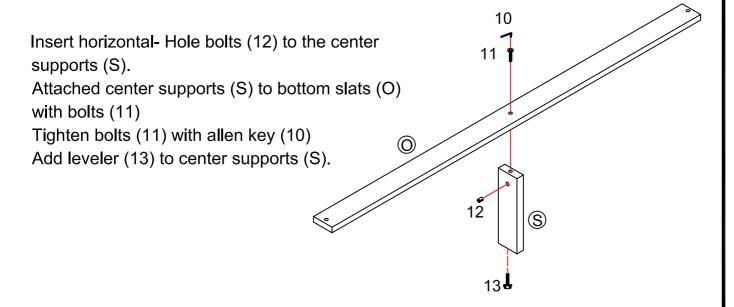


STEP 2

Insert nut (6) into lower back and front side rail (C,D)


Attached lower back and front side rail (C,D) to bottom right and left panel (A,B) with bolts (1).

Tighten bolts (1) with allen key (10)

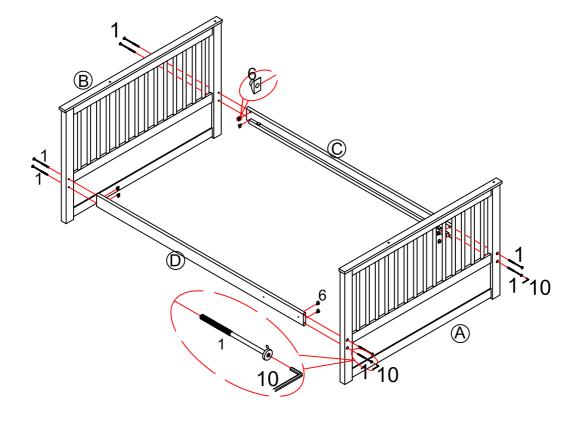

Attached bottom slats (I,O) to lower back and front side rail (C,D) with wood screws (8)

Tighten screws (8) with phillips head screw driver (not included).




STEP 4

Insert nut (6) into front upper side rail (H) and back upper side rail (G). Insert wood plugs (5) into back guardrail bar (J) and front guardrail bar (K). Attached the front upper side rail (H), back upper side rail (G) to top side panel (F,E) with bolts (1).

Attached back guardrail bar (J) and front guardrail bar (K) to top side panel (A,B) with bolts (4).


Attached front side guardrail bar (L) to front guardrail bar (K) with bolts(3). Tighten bolts (1,3,4) with allen key (10)

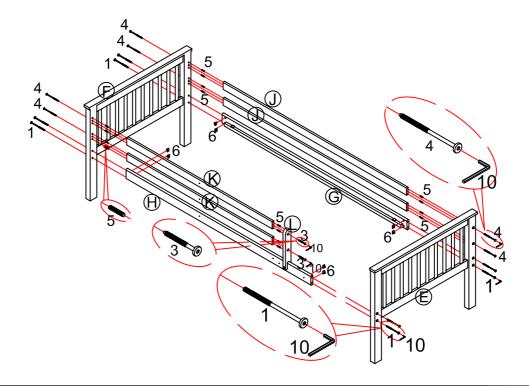

Attached guardrail reinforce bars (M) to back guardrail bar (J), front guardrail bar (K), front upper side rail (H) and back upper side rail (G) with bolts (2).

Attached front side guardrail bar (L) to front guardrail bar (K) and front upper side rail (H)with bolts (2).


Tighten bolts (2) with allen key (10)

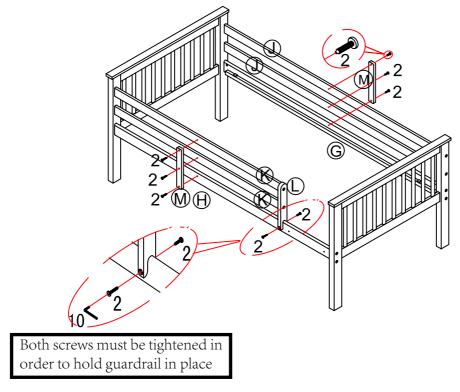


STEP 6

Attached upper slats (N) to front upper side rail (H) and back upper side rail (G) with wood screws (8).

Tighten screws (8) with phillips head screw driver (not included).

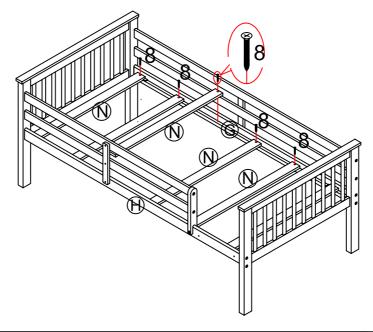

Attached top bunk to bottom bunk with Contacting bar (7).

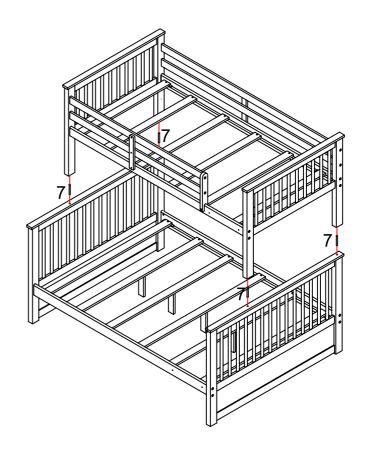


STEP 8

Insert wood plugs (5) into ladder steps (Q).

Attached the ladder steps (Q) to ladder left side rail (P) and ladder right side rail (R) with bolts (3).

Tighten bolts (3) with allen key (10)

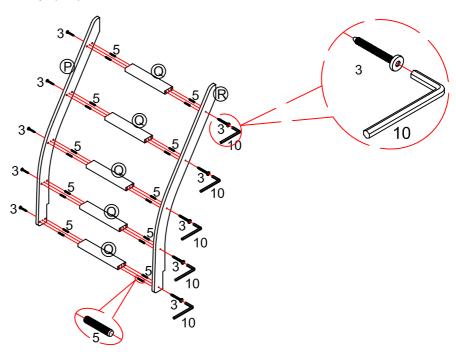

Attached the ladder onto front upper side rail (H),lower front side rail (D), and secure with bolt (9).

Tighten bolts (9) with allen key (10)

