ASSEMBLY INSTRUCTIONS

(For LD8176-1)

WARNING!

- ☐ Chair have a 250 lbs weight capacity.
- ☐ Hang cushion over chair frame to dry if it gets wet to prevent mold/mildew.


ATTENTION:

- 1. Please read these instructions carefully before assembly.
- 2. Aluminum is soft metal over tighten may strip threads or break the part.
- 3. DO NOT use power tools.
- 4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
- 5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

Assembly steps:

- 1. Loosely attached the clean back(C) to the left arm and right arm with bolt(E), flat washers(F), lock washers(G), nuts(H). DO NOT tighten the nuts.
- 2. Leave enough play for assembly the seats, push the seat to the seat to the gap between the arms and seat, tighten the bolt(E),flat washer(F), lock washer(G) and nut(H).
- 3. Finally attach the nut cap(I) to the back nuts. Tighten all the screw.
- 4. Turn the chair onto its legs and use the adjuster feet to level the legs.

Warning: please do not use acid or alkaline washing liquid to clean the product.

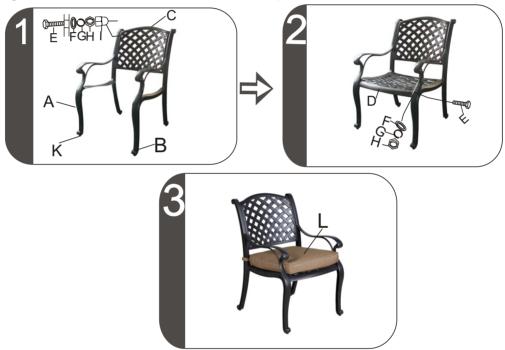

Parts list	Parts picture	Description	Qty		Parts list	Parts picture	Description	Qty				
А	A	Left arm	1		Е	(M8*35)	Bolt	8				
В	A	Right arm	1		F	(M8)	Flat washer	8				
С		Back	1		G	(M8)	Lock washer	8				
D		Seat	1		Н	(M8)	Nut	8				
K	-	Foot leveler	Factory already assembled		ı	(M8)	Nut cap	4				
L		Cushion	1		J	2_3	Wrench	1				

Made in China

***DO NOT OVER TIGHTEN**

***NO POWER TOOLS**

***NO SOCKET DRIVERS**





ASSEMBLY INSTRUCTIONS


(For LD1031A-52)

ATTENTION:

- 1. Please read these instructions carefully before assembly.
- 2. Aluminum is soft metal over tighten may strip threads or break the part.
- 3. DO NOT use power tools.
- 4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
- 5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

Assembly steps:

- Turn the table top(A) upside down on the soft clean surface. Loosely attach the legs(C) to the table top(A) with bolts(F), big flat washers(G), lock washers(H) nuts(E)and nut caps(L)using the wrench(N). Tighten the bolts at this time.
- 2. Loosely attach the center loops(C) to the legs(C). Note that the recessed end of plate goes on the leg last at each corner. Secure using small flat washers(I), small lock washers(J), bolts(D) and PVC covers(K) using the wrench(M).
- 3. Tighten all the bolts and nuts completely. DO NOT over tighten the nuts and bolts.
- 4. Turn the table onto its legs and put center tray on the table top. Use the adjuster feet to level the tables. Warning: please not using acid or alkaline washing liquid to clean the product.

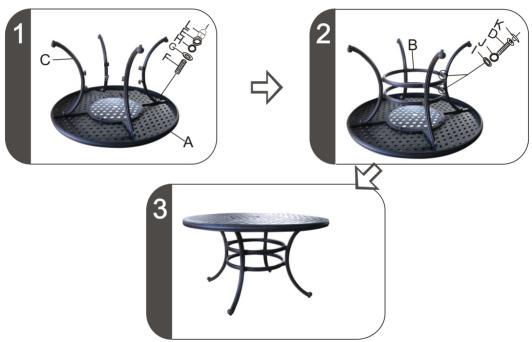

Parts list	Parts picture	Description	Qty		Parts list	Parts picture	Description	Qty
					D	(M6*35)	Bolt	8
A		Table top	1		E	(M8)	Nut	4
					F	(M8*30)	Bolt	4
В		Center loop	2		G	(M8)	Big flat washer	4
					Н	(M8)	Big lock washer	4
					I	(M6)	Small flat washer	8
					J	(M6)	Small lock washer	8
С		Table leg	4		K		PVC cover	8
					L	(M8)	Nut cap	4
0	•	Adjustable Foot	Factory already assembled		М		Wrench	1
					N	23	Wrench	1

Made in China

***DO NOT OVER TIGHTEN**

***NO POWER TOOLS**

***NO SOCKET DRIVERS**



