


# **Wellworth®**

Class Five® Toilet

### K-3997

#### **Features**

- Vitreous china.
- Regular height round-front bowl.
- Class Five® flushing system.
- Includes left-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed trapway.
- 12" (305 mm) rough-in.
- 10-1/2" (267 mm) x 7-3/4" (197 mm) water area.
- 27-3/4" (705 mm) x 18" (457 mm) x 29-1/4" (743 mm).
- Floor mount / Floor outlet.



K-4639 Cachet® Quiet-Close™ Round-Front Toilet Seat K-5589 Purefresh® Round-Front Toilet Seat K-76923 Puretide™ Quiet-Close™ Round-Front Manual Cleansing Toilet Seat K-5420 Low-Profile Bolt Caps K-9379 Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

### Components

Product includes:

K-4197 Round-Front Bowl

K-4467 Toilet Tank

Additional included component/s: Tank cover, Trip lever, Bolt cap accessory pack, and Tank accessory pack.





### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense®

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### **Available Color/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	7	Black Black™






## **Wellworth®**

Class Five® Toilet

K-3997

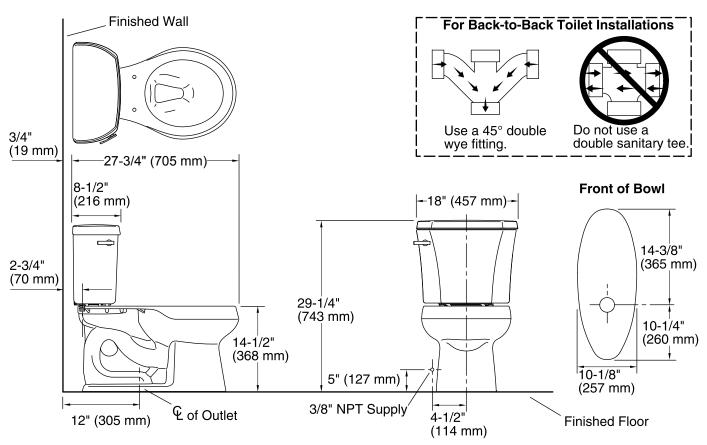

### **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Round front Flush type: Class Five® 2-1/8" (54 mm) Trap passageway:

Water Consumption

Full: 1.6 gpf (6 lpf) Reduced: 1.1 gpf (4.3 lpf)

Water surface size: 10-1/2" x 7-3/4" (267 mm x 197 mm)

Rim to water surface: 5-1/4" (133 mm)

Rough-in: 12

Seat-mounting holes: 5-1/2" (140 mm)

#### **Notes**

Install this product according to the installation

For back-to-back toilet installations: Use only a 45° double wye fitting.

