
INSTALLATION INSTRUCTIONS

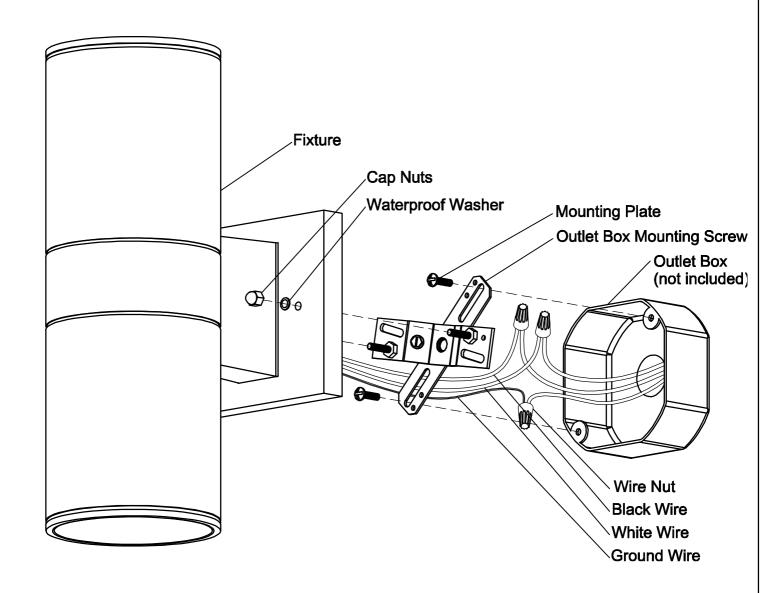

ASSEMBLY AND INSTALLATION

- 1. Shut off the power.
- 2. Use two Junction Box Screws to fix the Mounting Back Plate on the Outlet Box.
- 3. Connect supply wires to fixture wires and insulate with proper size wire nuts.
 - a) Connect ground wire (green or bare) to fixture ground wire (green or bare).
 - b) Connect common (white) wire to fixture common(white).
 - c) Connect hot (typically black) wire to fixture black wire.
- 4. Secure the fxture to mounting plate with the two cap nuts and gaskets .
- 5. To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. indoor/outdoor silicone sealant) to outline the outside of the fxture back plate where it meets the wall. Leave a space at the bottom to allow moisture to escape.