

Modern Freestanding
Gooseneck Faucet,
Shower Wand
&
Supply Lines

INSTRUCTIONS

Before beginning, read the instructions below and follow all local plumbing and building codes.

For this installation of your new Freestanding Tub Faucet it is presumed that the water supply lines are underneath the floor and are in direct access for faucet installation.

A rounded hole, 1-1/2" in diameter, will provide access to the water supply lines when mounting the faucet. The distance between the mounting location to the water supply lines should be approximately 4-6".

Unpack and inspect your new faucet for any shipping damages and ensure no pieces are missing. If any damages are discovered, DO NOT INSTALL.

Please Contact Customer Service at 1(866)448-TUBS. You may also call our Customer Service for any other assistance with our products.

SHUT OFF ALL WATER SUPPLY LINES AT THE TUB WHEN INSTALLING NEW FAUCET

TOOLS AND MATERIALS :

Level


Masking Tape

Drill

Shim

Allen Wrench

Adjustable Wrench

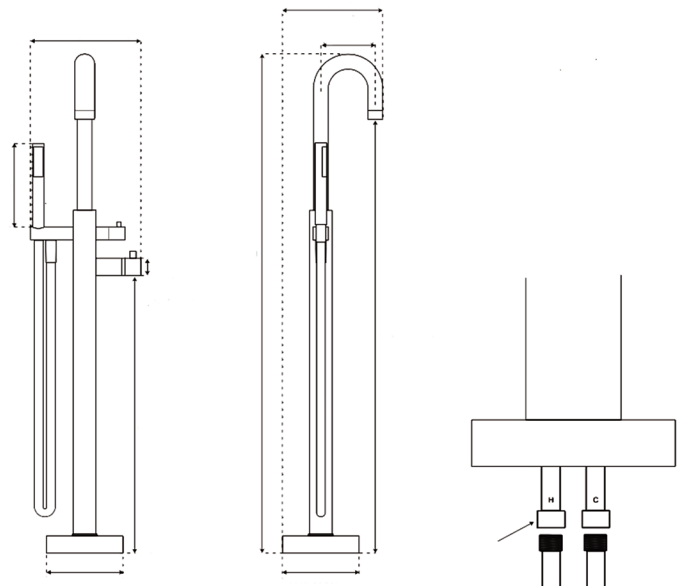

INSTALLATION

1. Lay faucet flat so parts can be viewed and accessed easily during installation.
2. Slide the base on to the body of the faucet if it is not already attached. If the pieces are already attached you may need to remove the mounting plate and/or hex nut (if included). If there is no base and the mounting plate is not removable, move on to step 4.
3. Attach the mounting plate to the body of the faucet. (if included) Screw the hex nut onto the body of the faucet followed by the mounting plate. The two should fit tightly together to create a tight seal.
4. Connect the flexible water feed tubes to the bottom of the faucet body. If tubes are already connected, move to step 5. Hand tighten these tubes ONLY. Once the tubes begin to warp when turned, they have been tightened enough. Further stress could damage the connection.
5. Thread the water feed tubes through the 1-1/2" hole in the floor and connect to the main water supply under the floor access space.
6. To ensure there are no leaks in the water feed tubes before fixing the faucet to the floor, turn on the water supply. If no leaks are discovered, turn off the water supply and continue with your installation. If leaking does occur, use an adjustable wrench to tighten the connections as needed. If you continue to have an issue, contact our Customer Service at 1(866)448-TUBS.
7. Set the faucet upright with the mounting plate on the floor. Use a level to verify that the faucet is properly placed. If the faucet is not level place a shim underneath the mounting plate and adjust as needed.

INSTALLATION CONTINUED

8. Using your drill, secure the mounting plate to the floor with the appropriate mounting hardware. Apply the decorative escutcheon(shield) by sliding it over the mounting plate and press into place.

9. To finish your installation, attach any hoses and/or handles that might be included. There is a bag of extra materials included in the packaging. There may be items that are not used at the time of assembly but may be needed later. DO NOT discard these materials.

TIP: Add the hand shower attachment by screwing the tapered end of the hose onto the hand shower so that the piece properly fits in the cradle.

10. Tighten the set screw located on the side of the faucet with an Allen Wrench to secure the spout.

11. When the faucet is installed turn on the water supply, check to ensure that all connections are sealed (no water should be leaking) and that the hot and cold supplies are working properly. If you have a hand shower, divert the water to the hose and allow the water to flow through the hose for about 60 seconds.

