

ALLORA USA® Kitchen Faucets

A-710-BN®
Pull-Down Kitchen Faucet

Features

- Three-function pull-down sprayhead with touch control allows you to switch from stream to spray to pause.
- Spray creates a wide, forceful blade of water for superior cleaning.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- Technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use.
- Features an easy-to-clean surface that withstands mineral buildup.
- High-arch spout offers superior clearance for filling pots and cleaning.
- Single handle is simple to use and makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.8 gpm (gallons per minute) maximum flow rate at 60 psi.

Material

- Premium metal construction.
- Allora USA finishes resist corrosion and tarnishing.

Installation

- For single-hole or three-hole installation (escutcheon plate not included)
- Flexible supply lines and installation ring simplify installation.

Optional Accessories

1053-KSD Soap Dispenser



ADA **CSA B651**

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF 61
NSF 372



DOE - Energy Policy Act 1992
ADA
ICC/ANSI A117.1
CSA B651

ALLORA USA® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CN	Chrome
	BN	Brushed Nickel

ALLORA USA® Kitchen Faucet

A-710-BN®

Pull-Down Kitchen Faucet

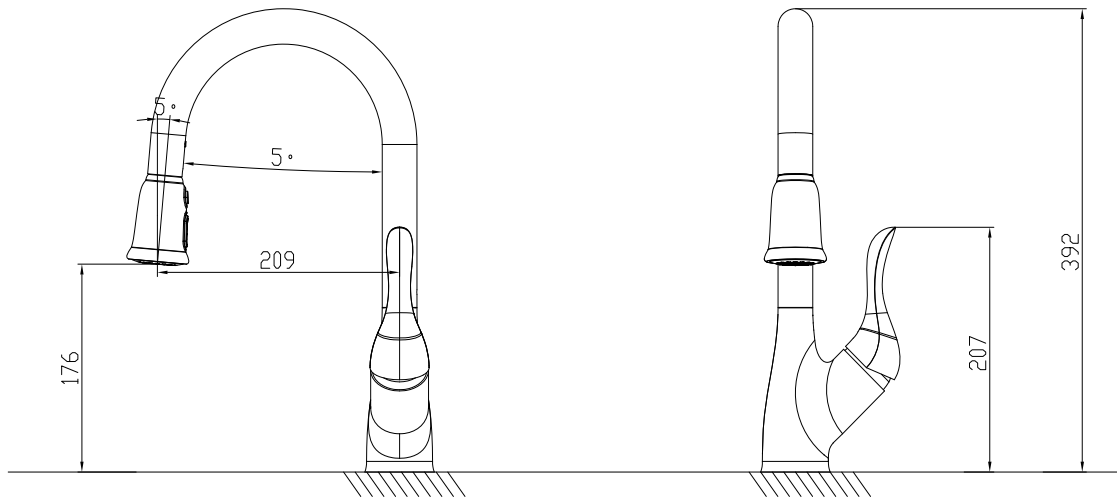

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.8 gal/min (6.8 l/min)

Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.