

VINNOVA

Step 4 Parts list 103123-BAF-PC/SN

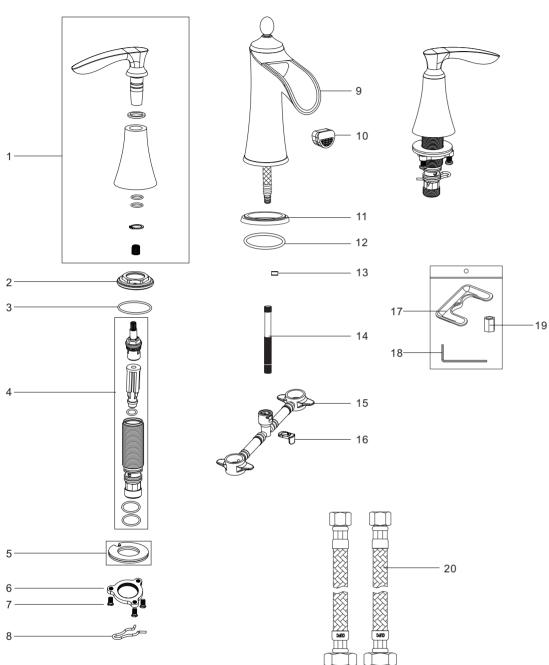

- 20

NO.	PART NAME
1	Handle assembly
2	Lock nut
3	O-ring
4	Water valve assembly
5	Gasket assembly
6	Lock nut
7	Screw
8	Clamp spring
9	Spout
10	Aerator
11	Base
12	O-ring
13	Flow restricter
14	Screw
15	Flexible hose
16	Plastic lock ring
17	Metal washer
18	Allen key
19	Lock nut
20	Flexible hose

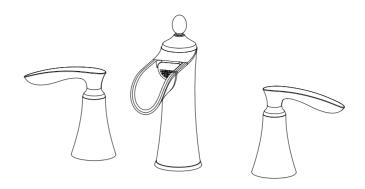


TWO HANDLE LAVATORY FAUCET

The product is CUPC, NSF-61, AB1953, WATERSENSE and ADA certified.


Original certification model code: 1B467KV7 ASME A112.18.1/CSA B125.1



The tools might be applied to the following places:

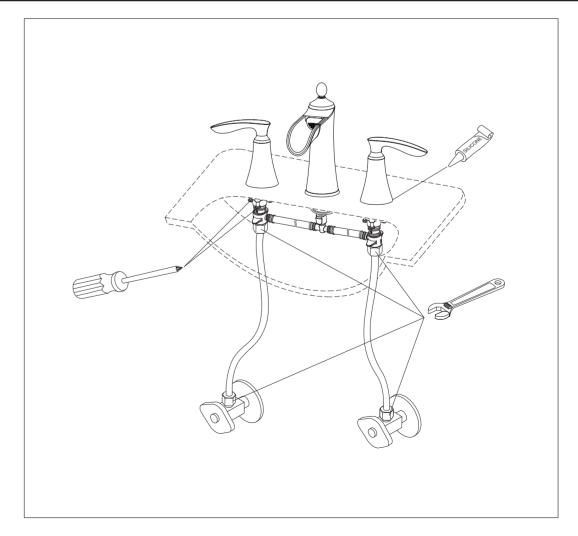


Step 1 Faucet installation Step 2 Checking and testing

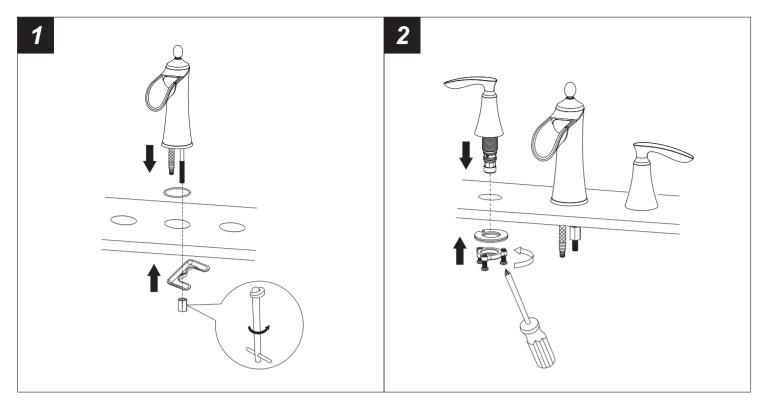


- 1. Position the body with o-ring in the installation surface as shown and secure it with metal washer and tighten the lock nut with basin wrench.
- 2.Position the handle in installation surface as shown and secure it with fixing kit and tighten the screw with screwdriver. Repeat the above steps for the other handle.

Caution: please be caution with the position of hot and cold handles.

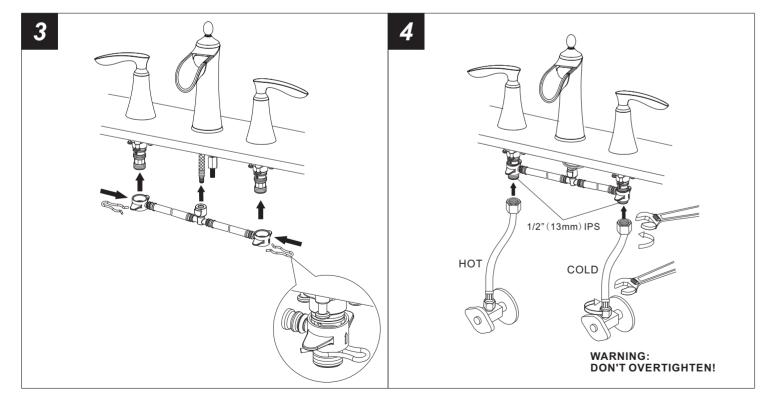

- 3. Position the flexible hose as shown and fix it to the faucet as shown with clamp spring.
- 4. Connect the water supply lines to faucet and water supply valve and tighten it with wrench.

Warning: The water supply valve mentioned above are not included, please purchase them from plumbshop.

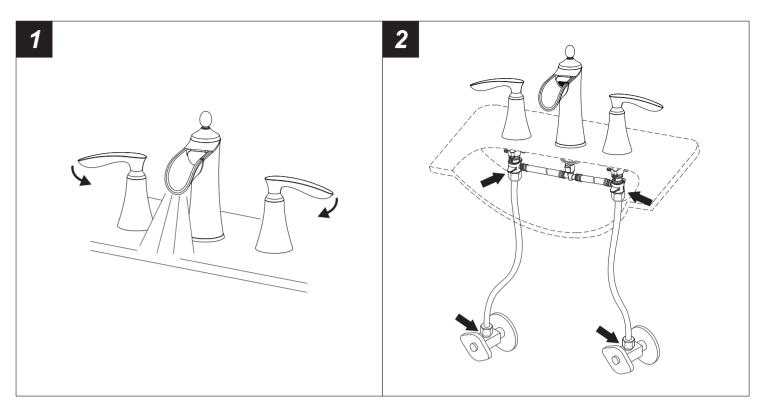

- 1. Turn the faucet handle all the way on, turn on hot and cold water supply and flush water lines for one minute. Reinstall aerator by hand.
- 2. Check all connections at arrows for leaks, re-tighten it if necessary.



BUT DON'T OVERTIGHTEN

Step 3 Cleaning and care

Daily cleaning and care are required in order to keep the product shining and properly working.

- 1 Clean it with water and dry it with soft cloth.
- 2 Clean the product with gentle liquid or glass cleaner.
- 3 Don't use acid cleaner.
- 4 Don't clean with abrasive material, abrasive paper or knife.