


# INSTRUCTION SHEET FOR TRAC & TRAC FIXTURES

1. All trac sections have an easy-to-see embossed polarity line.
2. All trac and fixture connectors have indicator arrows which point to the trac polarity line.
3. **TO INSTALL:**
  - A. Insert connector contacts into trac channel.
  - B. Retract connector latch by gently pulling down.
  - C. Rotate connector 90° so that polarity arrows point to the polarity line on trac.
4. When fixture is installed the connector latch will lock fixture into the trac. All latches must face same direction after installation.
5. Fixtures rotate 90° vertically and 355° horizontally. Do not force beyond the stops or damage may result.

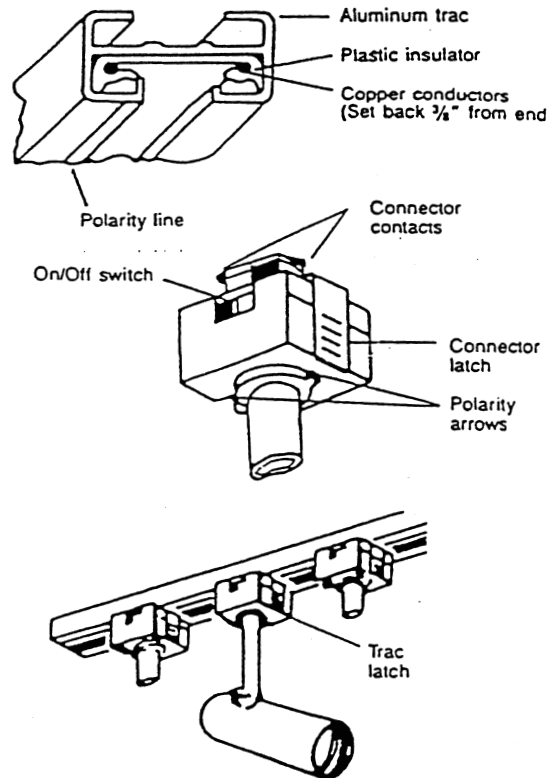

## GENERAL DATA

### CIRCUIT CAPACITY:

When permanently wired to outlet box, the single circuit system has a maximum capacity of 20 amps, or 2400 watts. When used with cord connector maximum capacity is 10 amps, or 1200 watts.

**NOTE:** Proper wiring is essential for the safe operation of this trac system.

Read the instructions carefully.

If you are unclear as to how to proceed, consult a qualified electrician.

### POLARITY:

All system components are mechanically polarized to assure proper connections. To simplify installation, components are also visually polarized.

**WARNING:** Be sure the electricity to the wires you are working on is shut off. Either remove fuse or turn circuit breaker off.