




Location:

**2DIVBODYSRT**  
Dual Outlet Diverter Valve Body  
Specification Submittal




<p><b>Feature Highlights</b></p> <ul style="list-style-type: none"> <li>• Symmons dual outlet diverter valve</li> <li>• Shared functionality between two outputs with defined detents</li> <li>• 2 discreet positions and 1 shared position</li> <li>• Male IPS and sweat inlet/outlet connections</li> <li>• Inlet/outlet connections in common plane</li> <li>• Components shall be metal construction</li> </ul>	<p><b>Compliance</b></p> <ul style="list-style-type: none"> <li>• ASME A112.18.1/CSA B125.1</li> </ul> 
<p><b>Model Numbers</b></p> <p><input type="checkbox"/> <b>2DIVBODYSRT</b> Symmons Dual Outlet Diverter Valve Body</p>	<p><b>Warranty</b></p> <p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.  <b>5 Years</b> - for industrial/commercial installations.  Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.  Go to <a href="http://www.symmons.com/register">www.symmons.com/register</a> to register your Symmons product.</p>

**Dimensions**

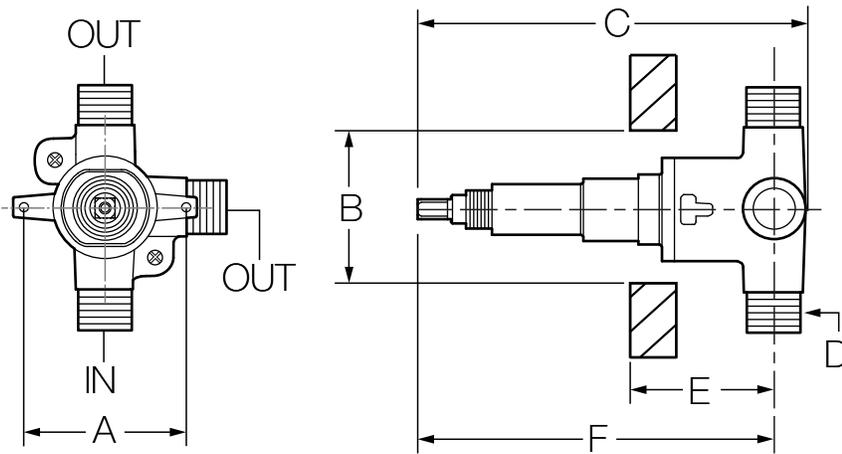

Measurements	
A	2-5/8", 67 mm
B	Hole Size Min. Ø 3", 76 mm Max. Ø 3-1/4", 83 mm
C	5-1/4", 133 mm
D	(3x) 1/2" male IPS & (3x) 1/2" female sweat
E	See note 1
F	4-7/8", 124 mm
G	Hole Size Min. Ø 1-3/4", 44 mm Max. Ø 1-7/8", 48 mm <b>LD-15A Escutcheon:</b> 2DIV Temptrol Commercial Safetymix Visu-Temp

LD-15A Escutcheon

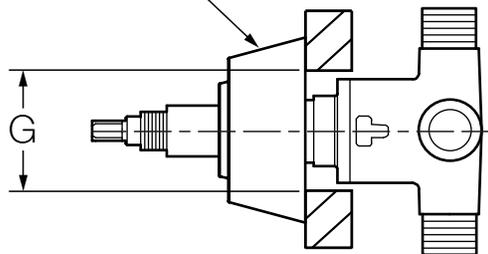

**Notes:**

- 1) Figure is determined by style of trim attached to shower valve.  
See rough-in dimension drawing for shower valve application with diverter valve.
- 2) Dimensions subject to change without notice.