

# Santa Rosa™

## Comfort Height® Compact Toilet K-3811

#### **Features**

- Vitreous china.
- Comfort Height® Compact Elongated bowl.
- AquaPiston® flushing system.
- Includes left-hand polished chrome trip lever.
- 1.6 gpf (6.0 lpf).
- 2-1/8" (54 mm) glazed trapway.
- 12" (305 mm) rough-in.
- Includes Brevia™ Quiet-Close™ seat.
- 11" (279 mm) x 8-1/8" (206 mm) water area.
- 27-3/4" (705 mm) x 18-3/4" (476 mm) x 28-3/16" (716 mm).
- Floor mount/ Floor outlet.

#### **Recommended Accessories**

K-75796 Cachet® Nightlight Quiet-Close™ Elongated Toilet Seat K-8298 C3®-155 Elongated Cleansing Toilet Seat K-5420 Low-Profile Bolt Caps K-9169-L Trip lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose

### Components

Additional included component/s: Tank cover, Trip lever, Bolt cap accessory pack, and Tank accessory pack.



ADA CSA B651 OB	С
-----------------	---

#### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 ADA ICC/ANSI A117.1 CSA B651 OBC

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

### **Available Color/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	7	Black Black™





# Santa Rosa™

### Comfort Height® Compact Toilet K-3811

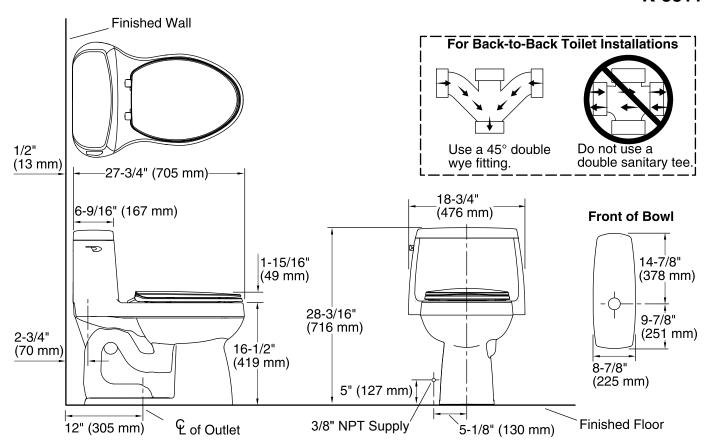

#### **Technical Information**

All product dimensions are nominal.

Toilet type: One-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front Flush type: AquaPiston®
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.4 gpf (5.3 lpf)

Water surface size: 11" x 8-1/8" (279 mm x 206 mm)

Rim to water surface: 6-1/4" (159 mm)

Rough-in: 12

Seat-mounting holes: 5-1/2" (140 mm)

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

The model is acceptable for left-hand Accessible compartment installations only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

