

Important safety instructions:

- Please read carefully all instructions before assembly.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.

Pre-assembly:


- Do not discard any content until assembly is complete to avoid accidentally discarding small parts or hardware.
- Take out all parts and hardware from box.

Parts List

Item	Descript	QTY	
P1	Chair Back		1
P2	Seat Frame		1
P3	Left Arm with Leg	9	1
P4	Right Arm with Leg	P4	1
P5	Seat Cushion		1
P6	Back Cushion		1

Hardware List

Item	Description						
H1	Big Long Bolts Ø5/16"*3"	(a)	8				
H2	Big Short Bolts Ø5/16"*1-3/4"	(a)	1				
Н3	Small Bolts Ø1/4"*1-3/4"	0	2				
H4	Big Lock Washers Ø5/16"	9	9				
H5	Big Flat Washers Ø5/16"	0	9				
H6	Small Flat Washers Ø1/4"	0	2				
H7	Big Allen Wrench 5/16"		1				
Н8	Small Allen Wrench 1/4"		1				
H9	Wooden Dowel Ø10*40mm	D	2				
H10	Wooden Plugs	Ø	2				




DISCLAIMER:

WHEN PROPERLY ASSEMBLED, THIS ITEM IS SAFE FOR INTENDED USE. SELLER IS NOT LIABLE FOR ANY DAMAGES RESULTING FROM ITEM BEING IMPROPERLY ASSEMBLED AFTER PURCHASE.

Assembly Procedures:


Step 1: Assemble the chair on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach the seat frame (P2) to chair back (P1) as shown below.



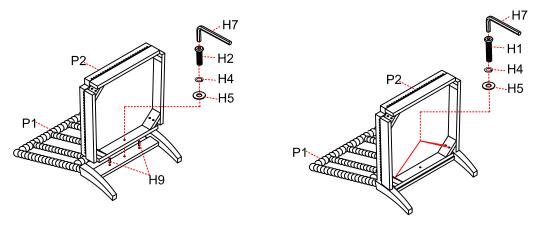


Step 2. Attach the left arm with leg (P3) and the right arm with leg (P4) to the seat frame (P2) and the chair back (P1) as shown below.

(H1)x4	Big Long Bolts Ø5/16"*3"	(i)	(H6)x2	Small Flat Washers Ø1/4"	0
(H3)x2	Small Bolts Ø1/4"*1-3/4"	(9)	(H7)x1	Big Allen Wrench 5/16"	
(H4)x4	Big Lock Washers Ø5/16"	©	(H8)x1	Small Allen Wrench 1/4"	
(H5)x4	Big Flat Washers Ø5/16"		(H10)x2	Wooden Plugs	\mathbb{O}

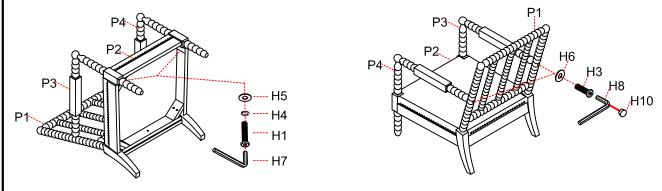

Step 3. Securely tighten all bolts, turn the assembled chair to an upright position. Put the seat cushion (P5) and back cushion (P6) to the assembled chair, assembly is complete. **Failure to follow these instructions may cause the bolts to misalign during assembly.**

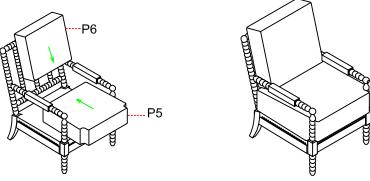

ADDITIONAL NOTE ABOUT SAFETY:

BOLTS MAY LOOSEN DURING NORMAL EVERYDAY USE.

THEY SHOULD BE INSPECTED AT LEAST EVERY 3 MONTHS AND RE-TIGHTENED AS NEEDED TO PREVENT DAMAGE OR INJURY, AND ENSURE STABILITY.

Thank you for your purchase