



Cape Dory® under-mount kitchen sink K-5864-5U

Features

- 36-inch minimum base cabinet width.
- Large single bowl.
- 9" depth provides generous workspace.
- Single compartment.
- Three oversized faucet holes with two oversized accessory holes to the right.
- Strainer not included.

Material

- KOHLER® enameled cast iron.
- Acid-resistant enamel finish.

Installation

- Undermount.
- Oversized holes allow for easy installation of faucets and accessories.

Recommended Products/Accessories

K-6063 Sink Rack
K-8801 Sink Strainer
K-8799 Sink Strainer
K-6637 Cutting Board
K-23726 Drain treatment
K-23725 Cast iron cleaner

Optional Products/Accessories

1054375 Undermount sink kit, 23"
K-11352 Disposal Flange with Stopper
K-9000 P-Trap



Codes/Standards
















ASME A112.19.1/CSA B45.2


KOHLER® Enameled Cast Iron Kitchen Sink Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	FF	Sea Salt™
	96	Biscuit
	47	Almond
	FD	Cane Sugar™
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	K4	Cashmere
	FT	Basalt
	58	Thunder™ Grey
	R1	Roussillon™ Red
	KA	Black 'n Tan
	FP	Caviar
	7	Black Black™

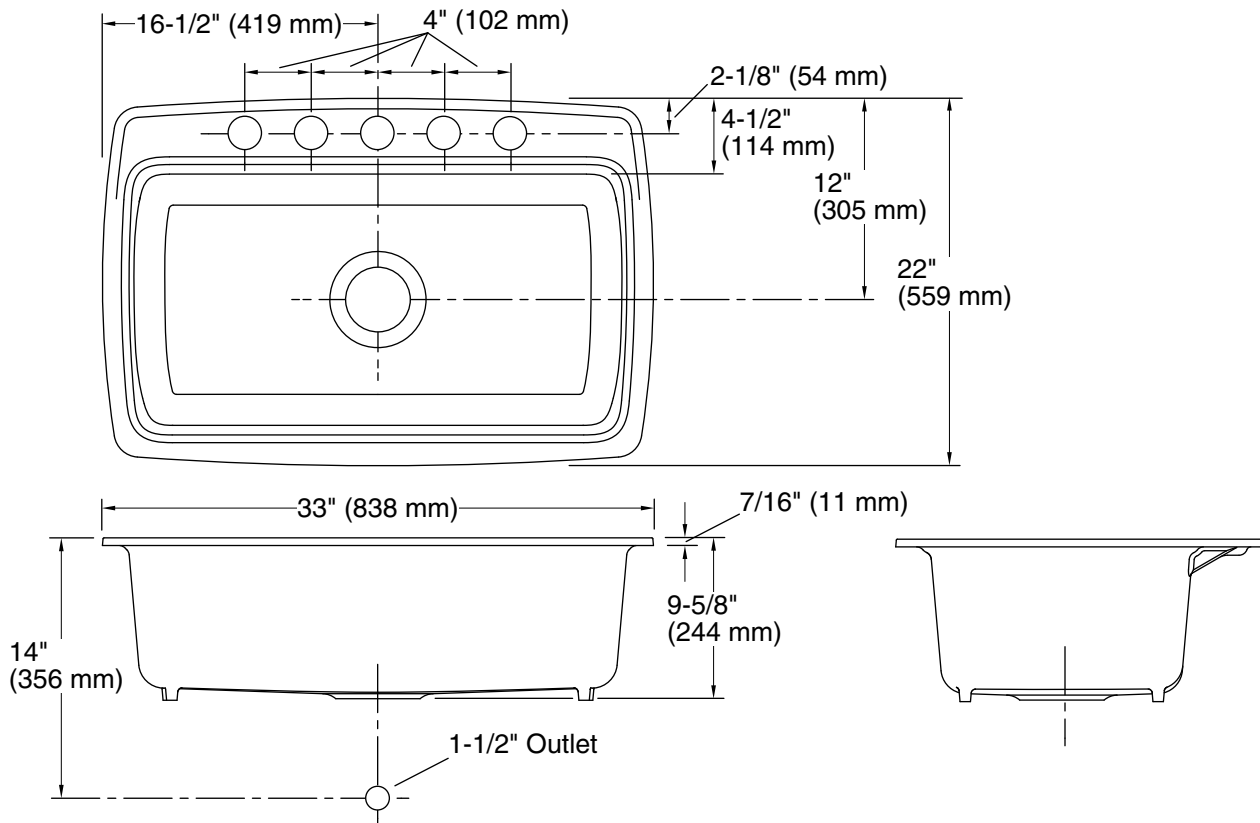

Technical Information

All product dimensions are nominal.

Bowl configuration: Single

Installation: Under-mount

Min. base cabinet width: 36" (914 mm)

Bowl area (Only): Length: 29" (737 mm)
Width: 15" (381 mm)
Bowl depth: 9" (229 mm)

Number of deck holes: 5

Faucet hole(s): 2-3/8" (60 mm)

Drain hole: 3-5/8" (92 mm)

Template: Under-mount, 1034873-7, required, included

Notes

Install this product according to the installation instructions.

Faucet holes in under-mount fixture are oversized at \bar{A} 2-3/8" (60 mm). Drill faucet holes in counter according to fitting roughing-in.