


SINGLE HOLE FAUCET INSTALLATION


Installation

1. Ensure that the water supply below your sink is completely shut off by turning the shutoff valves all the way to the right.


Tip: Place a small bucket below your workspace to catch any water that may drip during the installation process.

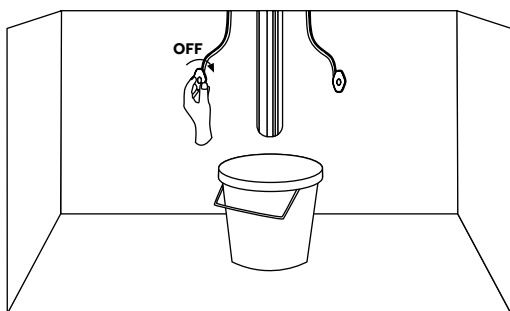


2. Attach the provided braided water lines to the faucet body by hand tightening them. Finish tightening them by using an adjustable wrench, but be careful not to overtighten. One 1/4 turn should suffice.

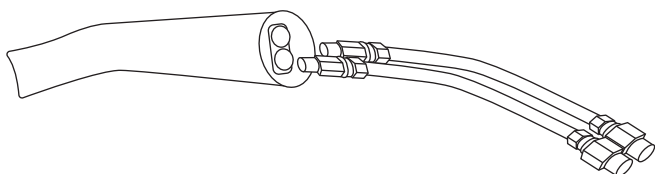


3. Remove the brass lock nuts from the mounting posts, and attach the threaded mounting posts to the faucet body using a Philips screwdriver. Set the brass lock nuts aside for now.

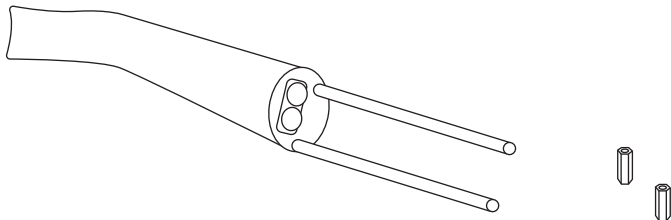

4. Slide the decorative escutcheon onto the braided water lines and up to the faucet body. From above the counter top, set the faucet into its prepared mounting hole.

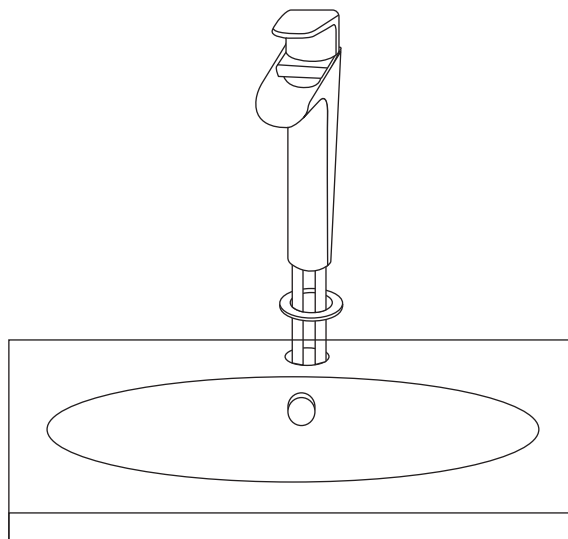


5. From beneath the sink, slide the rubber gasket onto the mounting posts, followed by the metal washer. Ensure that each post passes through its designated hole. Hold in place.

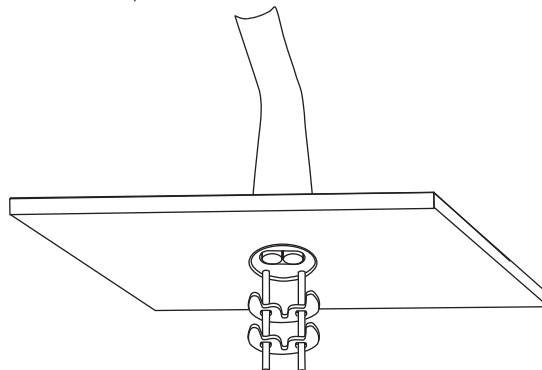


SINGLE HOLE FAUCET INSTALLATION


6. Secure the faucet by reattaching the brass lock nuts that were removed in step 3. Hand tighten and adjust the faucet until it is properly aligned. Once aligned, use the provided wrench to finish tightening the lock nuts.

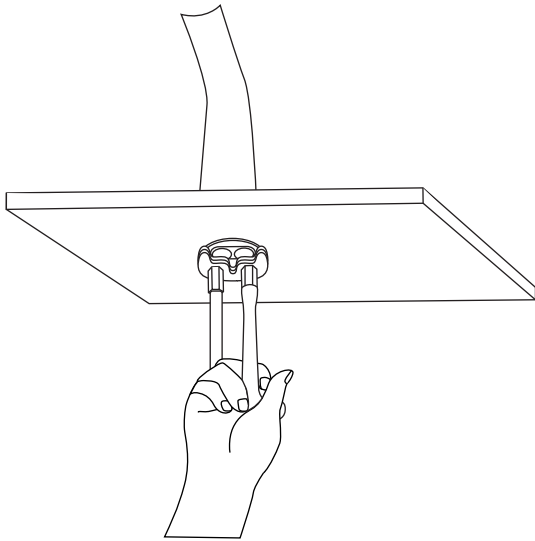

7. Apply plumber's tape or thread sealant to the threading on each braided water line. Attach the water lines to your main water supply lines. Ensure that you are connecting the hot and cold lines appropriately.

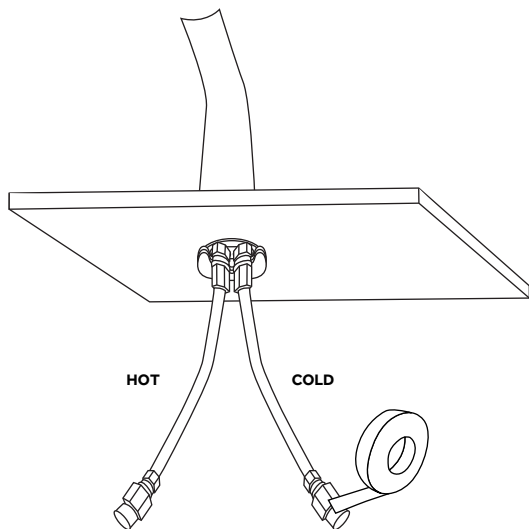

8. Once installation is complete, turn the main water supply back on from underneath your sink. Check for any leaks underneath.

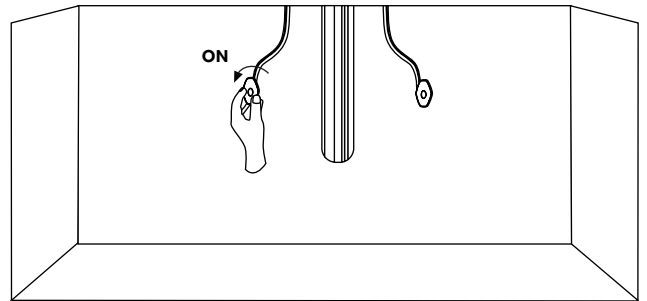

9. Turn the faucet on and ensure that there are no leaks. Check to ensure that both hot and cold water are running properly. Allow the water to flow for approximately 60 seconds to remove any dust or sediment within the water lines.

