

Escape ESHS6036SKTF

60" x 36" x 22"

PRODUCT NUMBER: ESHS6036SKTF-LH & ESHS6036SKTF-RH



HYDRO SILVER SERIES

Hydro Massage
Your Health ... Our Passion

TECHNICAL SPECIFICATIONS

Drain	End drain
Pump Location(s): Select 1	Std. = Standard / Alt LF/RF Optional
Bath Weight (empty)	170 lbs
Gallons to Operate	33-51

ELECTRICAL SPECIFICATIONS

Motor/Pump	(1) 115v 20AMP GFCI Circuits
Inline Stainless Steel Heater	(Opt) 115v 20AMP GFCI Circuit

BATHERS: 1

INSTALLATION

DECK (D)
UNDER MOUNT (U)
• ALCOVE (A)
FREESTANDING (F)
CLAWFOOT (L)
PEDESTAL (P)

Jet &
Control
placement
may vary



Skirt & Tile Flange
- Access Panel
with screws &
caps



STANDARD FEATURES & ACCESSORIES for HYDRO SILVER SERIES BATHS

JETS

9 Water Jets
Tri-Zone Back Systems 3 Jets
Ultra Flow Jets
Micro Flow Jets

PUMPS

2.25 Hydropower 1-speed Pump
Quiet Pad Anti-Vibration Mounted Pump

CONTROLS

Air Switch On/Off Control(s)

PURITY

HydroClean Water Purity System
HydroCleanse

STANDARD ACCESSORIES

FDA Recipe Non-Toxic Food & Beverage Grade Plumbing (primarily)
30 Point Quality Assurance Factory Test
EZ Level Adjustable Legs
Integral Tile Flange

REQUIREMENTS

Pump Locations: Select 1

Electrical: one 115v GFCI Circuits

Tub should not be supported by the lip in any way. Level tub & screw or glue EZ Level adjustable legs to sub floor.

CUT OUT DIMENSIONS:

OVALS: A template will be provided


RECTANGLES: Subtract 1" to 1.5" from length & width for hole cut out size

EZ CLEAN CAST ACRYLIC
LIMITED LIFETIME WARRANTY



OPTIONAL FEATURES & ACCESSORIES

(Please type in the box below)

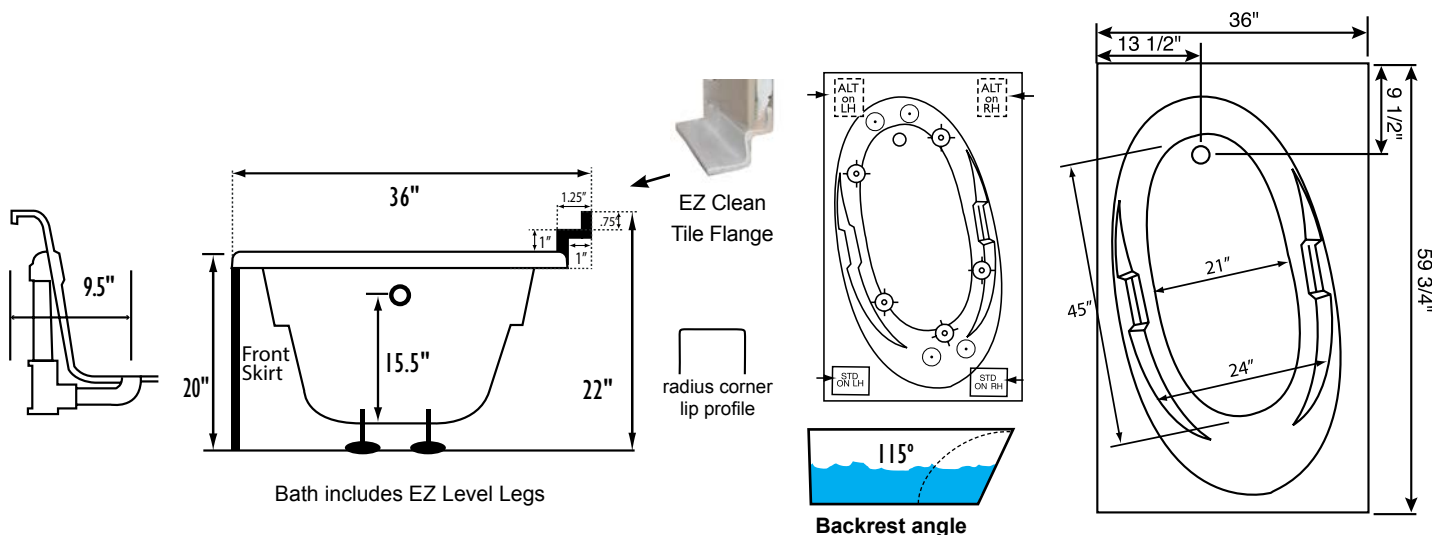

Some standard & most alternate pump locations may stickout past perimeter of the bath 1"-3". NOTE: Graphics may not be to scale. Specifications and features are subject to change without notice and are $\pm .25"$. All final measurements should be taken from tub on site. Access 18"x 18" or larger is required for each pump. Consult your contractor for installation requirements.