



Location:

S-3500-CYL-B-TRM, S3500CYLBTRMTC
 Shower Valve Trim
Specification Submittal



Feature Highlights

- Dia Shower Valve Trim
- Requires Temptrol® Pressure Balancing Shower Valve
- Integral volume control
- Metal lever handle
- Showerhead not included
- Tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S3500CYLBTRMTC)

Model Numbers

- S-3500-CYL-B-TRM**
Shower Valve Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately
- S3500CYLBTRMTC**
Shower Valve Trim with integral volume control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

Compliance

- ASME A112.18.1/CSA B125.1



Warranty


Limited Lifetime - to the original end purchaser in consumer/residential installations.
5 Years - for industrial/commercial installations.
 Refer to www.symmons.com/warranty for complete warranty information.
 Go to www.symmons.com/register to register your Symmons product.

Options/Modifications

- Delete Suffix B** *Chrome plastic escutcheon on valve with color graphic/indicators in place of standard brass escutcheon*
- REB** *Rebuild trim kit, includes TA-10 and TA-4*
- BBZ** *Brushed Bronze finish*
- MB** *Matte Black finish*
- STN** *Satin Nickel finish*

Note: Append appropriate -suffix to model number.

Dimensions

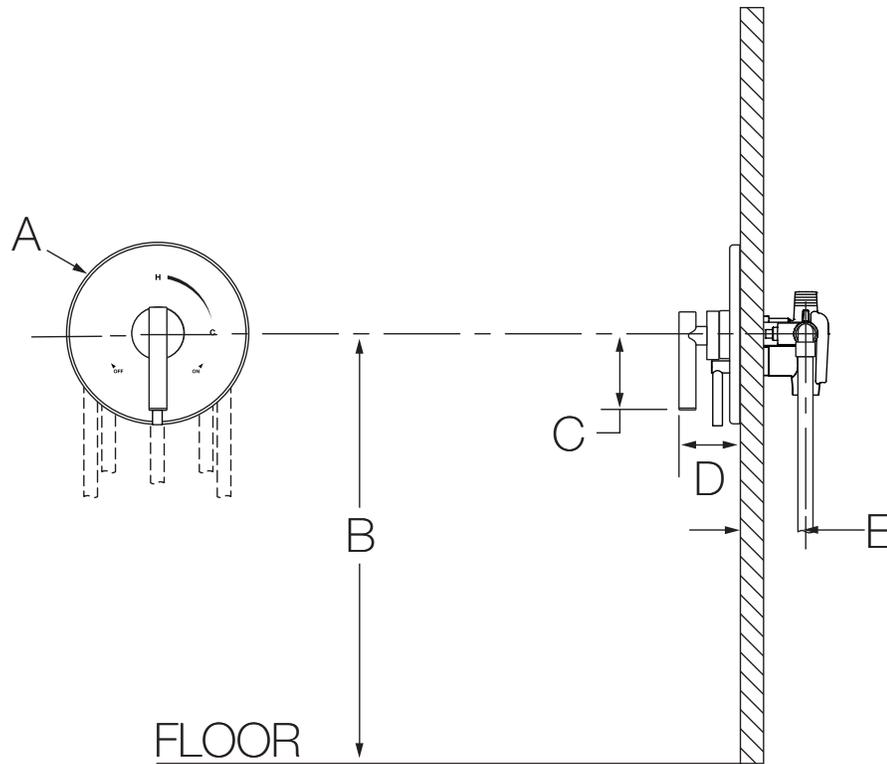

Measurements	
A	9-1/4", 235 mm
B	5-3/4" 146 mm
C	4-1/2", 114 mm
D	3-1/4", 83 mm
E	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see E as reference).
- 4) Dimensions subject to change without notice.