



HRG3080U / HRG3080ULP



Product: 30 Inch Professional Gas Range in Stainless Steel **Model Number:** HRG3080U / HRG3080ULP

TECHNICAL DETAILS		
Fuel Type	Natural Gas / LP Convertible	
Electrical Requirements	120 V	
Circuit Breaker	15 A	
Frequency	60 Hz	

BURNER PERFORMANCE		
Total Burners	4	
(1) Front Left (Single)	18,000 BTU	
(2) Front Right (Dual Burner With Simmer Function)	15,000 BTU (650 BTU for Simmer)	
(3) Rear Left (Single)	12,000 BTU	
(4) Rear Right (Single)	12,000 BTU	
Tube Broil Burner	13,000 BTU	
U-Shape Bake Burner	22,000 BTU	



FEATURES & BENEFITS

- High-Powered BTU Burners: From a high-powered 18,000 BTU burner to a burner with a steady 650 BTU simmer function, this range gives you the power you need for large family meals and the consistent low heat desired for cooking delicate sauces or melting chocolate.
- LuxGlide™ Telescopic Racks: Telescopic racks use ball bearing rack guides for an effortless glide in and out of the oven. This luxury feature allows the rack to extend fully without tipping over for smooth, easy handling of even the heaviest dishes, and adjusts to fit different rack support levels.
- Gas Flame Broiler: Reflective gas flame broiler radiates heat evenly to sear your food and seal in the juices.
- Commercial Convection Fan: Convection fan provides controlled heat distribution for fast and efficient cooking.
- LED Control Panel Lights: When in operation, the LED control panel lights illuminate a striking blue for an added pop of color.
- Large Oven Capacity: 4.2 cu. ft. oven capacity can accommodate multiple dishes for enhanced cooking.
- Continuous Cast-Iron Cooking Grates: Heavy-duty continuous cast-iron cooking grates that can handle any size cookware.
- Brilliant Blue Porcelain Interior: The brilliant blue porcelain interior adds a bold, stylish touch to your professional range.
- Heavy Duty Control Knobs: Heavy duty, die-cast metal burner control knobs add style and durability.
- Black Porcelain Spill Tray: Black porcelain spill tray on cooktop catches the mess and makes cleanup easy.
- **Automatic Reignition Feature:** Automatic reignition feature relights an extinguished flame for safer cooking.

ACCESSORIES (NOT INCLUDED)		
Liquid Propane Gas Conversion Kit	LPKHRG3080U	
30-inch Telescopic Rack	TR30SS	
30-inch Island Trim	ITHRG3080U	
Cast Iron Reversible Griddle	RG1022	
Wok Ring	WK01	
Cast Iron Range Griddle	RG1032	









30 INCH PROFESSIONAL GAS RANGE


HRG3080U / HRG3080ULP

PRODUCT DIMENSIONS		
Product Width	30"	
Product height (from bottom to top of back splash)	38 3/8" - 39 3/8"	
Product height (from bottom to top of side panel)	35 9/16" - 36 9/16"	
Product depth (from back panel to bullnose)	27-15/16"	
Product depth (from back panel to control board)	26-9/16"	
Product depth (from back panel to side panel front)	24-13/16"	
Depth of control panel (minimum)	1-11/16"	
Depth of control panel (bullnose)	3-1/8"	
Cast iron cooking grate (W x L)	10-3/4" x 23"	
Adjustable Legs	Not to Exceed 1"	


PRODUCT DIMENSIONS	
30 1/8" W x 24 13/16" D x 35 9/16" (+1")H	


5/16"

PRODUCT DIMENSIONS		
Oven Cavity Dimension (WxDxH)	24" x 18" x 15-1/4"	
Oven Rack Dimension	22-3/4" x 15-1/2"	
Distance Between Oven Rack	2-1/8"	



NG: Input Pressure: 7 inches, Output Pressure: 5 inches LP: Input Pressure: 11 inches Output Pressure: 10 inches Size of Regulator: ½ inch



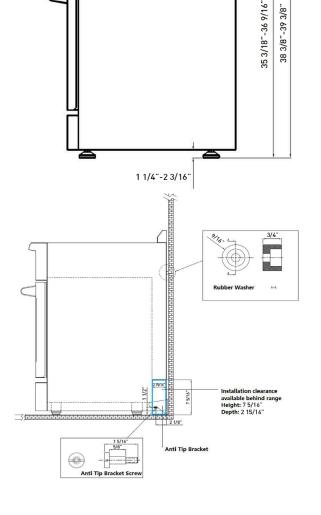

29 9/16" 27 15/16" 26 9/16"

24 13/16"

TOPIT