


ASSEMBLY INSTRUCTION

(for connecting the wire of the light on this cabinet)

Item# 5750-75906-LTWD Display Cabinet

*** Caution: Please read all instructions carefully before starting the assembly process.

Please note this cabinet can be used alone with can light on by a touch dimmer. Also, when two or more are bunched together, you can control all can lights by touching one dimmer.

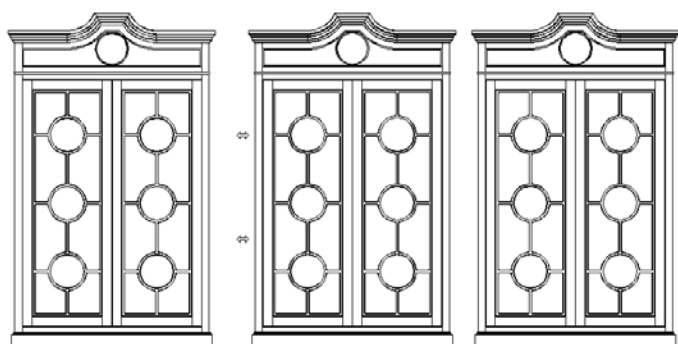

- A — male connector (of the power switch)
- B — female connector (of the power switch)
- C — male connector (of the can light)
- D — female connector (of the can light)
- E — male connector (of the power wire)
- F — female connector (of the power wire)

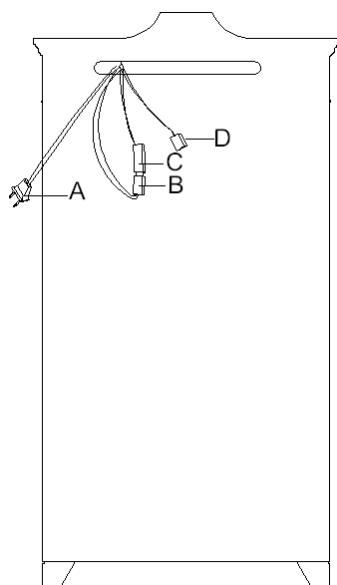


Diagram 1

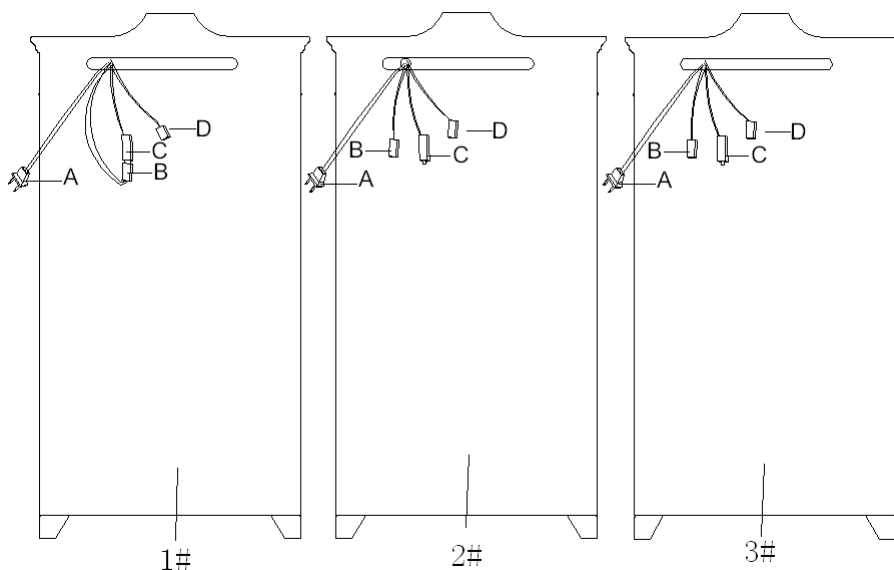


Diagram 2

Assembly Steps:

1. When each piece of cabinet is used alone, attach male connector of the power switch (A) to a wall plug. (See Diagram 1)
2. Touch dimmer is at the inside of right post.

3. If you want to bunch two or more cabinets together, place them all side by side in a desired location.
4. Leave male connector of the can light (C) and female connector of power switch (B) for the first cabinet (#1) as it is. Keep male connector of the can light (C) and female connector of power switch (B) off for the rest cabinets (#2, #3, and so on). (See Diagram 2)
5. Connect female connector of the can light (D) (#1 cabinet) with male connector of power wire (E), then have female connector of power wire (F) connected to male connector of the can light (C) (the #2 cabinet). (See Diagram 3)

Diagram 3

Cleaning instruction: Clean finished parts with a mild dishwashing liquid and water solution on a damp cloth. Polish the finish with soft cloth and an industry recognized furniture polish.