



Submitted Model No.:\_\_\_\_\_\_\_\_Specific Features:

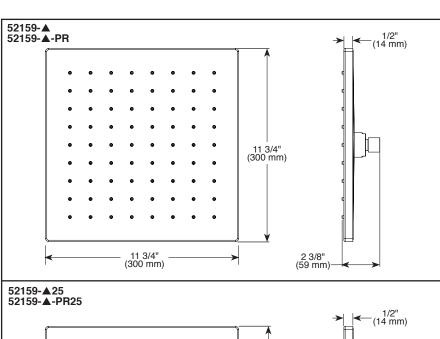

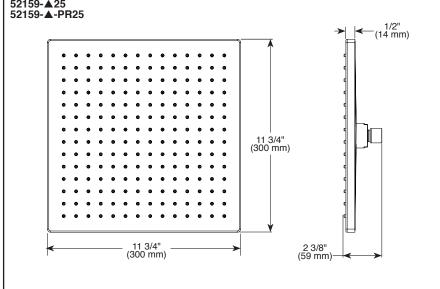

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



see what Delta can do

# RAINCAN SHOWER HEAD

■ Single-Setting Raincan Shower Head

## **FEATURES:**

- Touch-Clean® Nozzles
- Lumicoat<sup>™</sup> Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

### **STANDARD SPECIFICATIONS:**

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa (52159▲)
- Max flow rate 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa (52159▲-25)
- Metal ball connector for durability
- Ball connector swivel angle is 36° (18° per side)
- Standard 1/2"-14 NPT pipe fitting

#### **WARRANTY**

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5
  years from the date of purchase; or for commercial
  purchasers, 1 year from the date of purchase. No
  warranty is provided on batteries.



#### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense<sup>®</sup> Applies to 52159-▲ and 52159-▲-PR only