

One-Light Close-To-Ceiling

Wall or ceiling mounted • Damp location listed



Description:

Transit is a uniquely styled series with clean design flexibility. This one-light LED close to ceiling featuring a white acrylic diffuser and Brushed Nickel finish can mount to either ceiling or wall.

Specifications:

- Brushed Nickel (-09) (plated)
- Steel Construction
- White acrylic diffuser
- Replaceable LED module.
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	776/45.1 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified

P3411-0930K9

Images:



Dimensions:

Square: 11"
Depth: 3-3/4"
Height: 3-3/4"
H/CTR: 5.2"

One-Light Close-To-Ceiling

Wall or ceiling mounted • Damp location listed



Photometrics:

P3411-0930K9

ELECTRICAL DATA		P3411-0930K9
Input Voltage	120 V	
Input Frequency	60 Hz	
Input Current	0.142 A	
Input Power	17	
Power Factor	Greater than 0.90	
THD	<20%	
FCC	Meets FCC Title 47, Part 15 Class B	
Operating Temperature	-30 °C to 30 °C	
Dimming	Yes*	

*See Dimming Notes for more information

P3411-0930K9


LED Light Engine: 3000 K 90 CRI

System Wattage: 17

Fixture delivered lumens: 776

Fixture Efficacy: 45.1

Spacing Criteria: 1.4

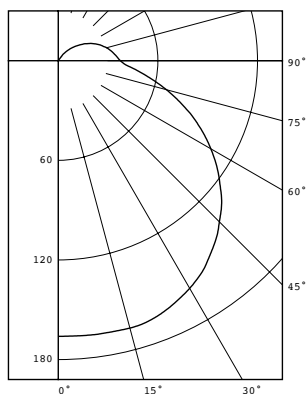

Test 15.00603 Test Date 4/17/15

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	166	
5	166	16
15	167	47
25	162	75
35	153	96
45	137	106
55	118	105
65	94	93
75	67	71
85	44	48
90	37	
95	35	38
105	30	32
115	24	24
125	17	15
135	10	8
145	0	1
155	0	0
165	0	0
175	0	0
180	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	138	17.8
0-40	234	30.1
0-60	445	57.3
0-90	658	84.7
90-120	94	12.1
90-130	109	14.1
90-150	118	15.3
90-180	118	15.3
0-180	776	100.0

P3411-0930K9

Dimming Notes:

P3411 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Nova T NTELV-300

Lutron Verti VTELV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.